
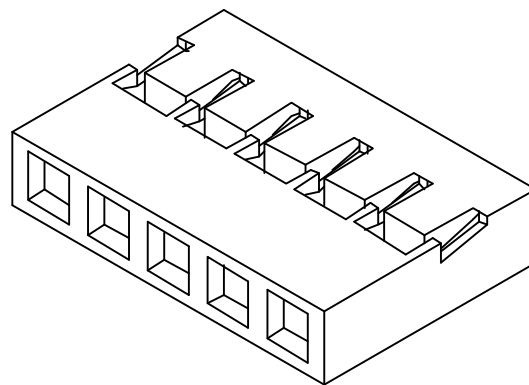




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

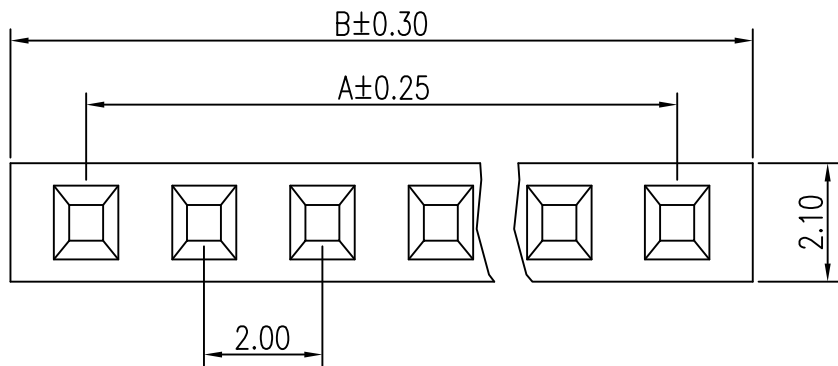

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA66/PBT,UL94V-0
 2.MECHANICAL PERFORMANCE:
 2-1.RETENTIVITY FORCE: 1.0KGF/pin min
 2-2.DURABILITY: 50 CYCLES.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 250V AC/DC
 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 3-3.INSULATION RESISTANCE: 500MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 800V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 5.PACKAGE SPEC: PE BAG
 6.P/N:

A2005 H M-1 XX X X
 SERIES NO: _____
 CONNECTOR: _____
 H-HOUSING
 MALE FEMALE: _____
 M-MALE
 WATER CODE
 1-PA66,UL94V-0
 2-PBT,UL94V-0
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PIN Q'PY:
 04~60
 ROW NO:
 1-SINGLE ROW

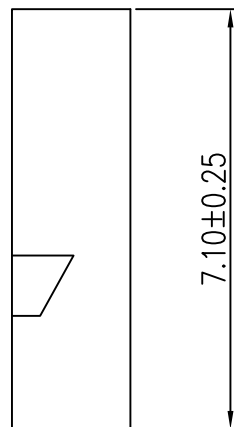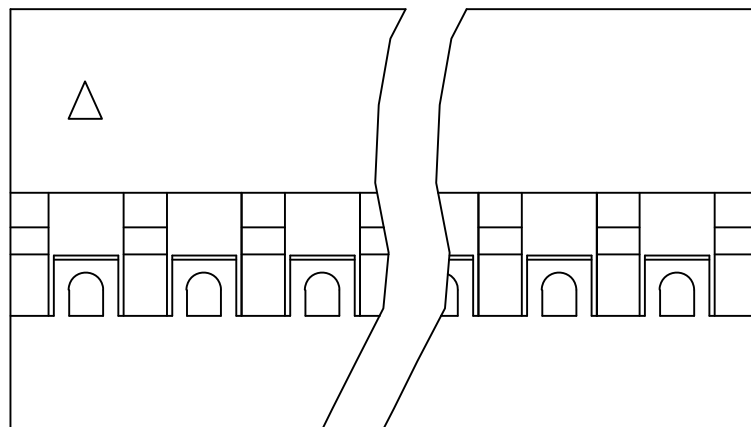

PART No.	Dimension mm		PART No.	Dimension mm	
	A	B		A	B
02	4.3	2.00	14	28.30	26.00
03	6.30	4.00	15	30.30	28.00
04	8.30	6.00	16	32.30	30.00
05	10.30	8.00	17	34.30	32.00
06	12.30	10.00	18	36.30	34.00
07	14.30	12.00	19	38.30	36.00
08	16.30	14.00	20	40.30	38.00
09	18.30	16.00	21	42.30	40.00
10	20.30	18.00	22	44.30	42.00
11	22.30	20.00	23	46.30	44.00
12	24.30	22.00	24	48.30	46.00
13	26.30	24.00	25	50.30	48.00

REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1					
			0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.11.17	A2005HM-1XXXX	ENDE05	 WanLian Teconology Co., Ltd	
			0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE:			
			0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17	Pitch2.00mm 180° 杜邦2.单排 Housing			
			SIZE: A4							REV: A0	SHEET: 1/1