
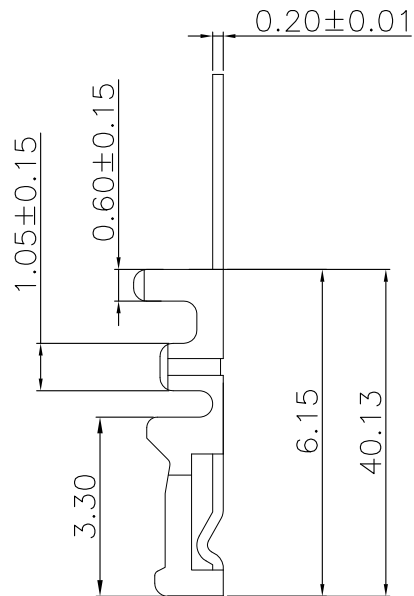


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

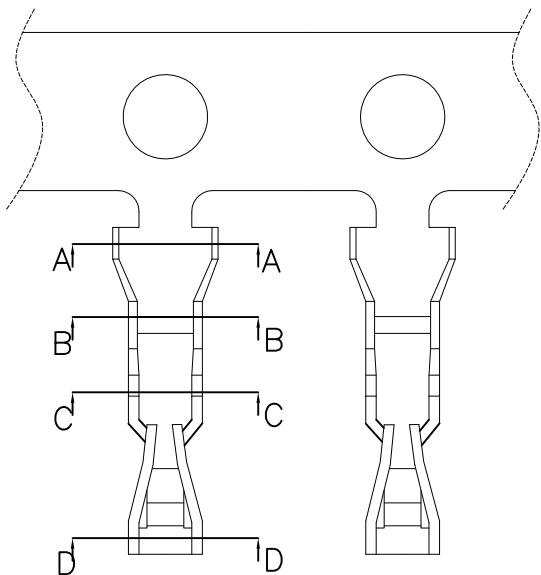


- NOTE:
- MATERIAL SPECIFICATION:  
1-1.CONTACTS: PHOSPHOR BRONZE
  - PLATING SPECIFICATION:  
2-1.CONTACTS:  
TIN/GOLD FLASH PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:  
3-1.RETENTIVITY FORCE: 1.0KGF/pin min  
3-2.DURABILITY: 50 CYCLES.
  - ELECTRICAL PERFORMANCE:  
4-1.CURRENT RATING: 3A AC/DC  
RATED VOLTAGE : 250V AC/DC  
4-2.CONTACT RESISTANCE: 10 mΩ MAX  
4-3.INSULATION RESISTANCE: 500MΩ Min  
4-4.DIELECTRIC WITHSTANDING : 800V
  - ENVIRONMENTAL PERFORMANCE:  
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
  - PACKAGE SPEC: REEL
  - P/N:


SERIES NO: A2005 T 1 F X-X  
 CONNECTOR: T-TERMINAL  
 MALE FEMALE:  
 F-FEMALE  
 M-MALE

PLATING:  
 1-G/F  
 A-ALL AU G/F  
 C-BRIGHE TIN  
 D-MATTE TIN


METAL:  
 P-PHOSPHOR BRONZE  
 B-BRASS




SEC:A-A




SEC:B-B



SEC:C-C



SEC:D-D

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.11.17		SIZE: A4	LINEAR 0.0±0.35	ANGLES X°REF±6°	APPROVED	Wang_jr	21.11.17	A2005T1FX-X	
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch2.00mm 180°Female Terminal AWG #22 -#28 松端		REV: A0
				0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17			SHEET: 1/1