


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements





RoHS+HF

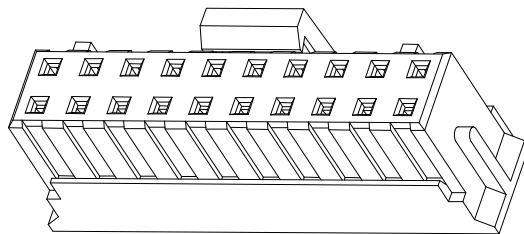

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 1.5KGF/Pin Min
 - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 250V AC/DC
 - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 800V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

SERIES NO: A2006 H 1 M-2 XX X 0
 COLOR: A-BLACK, K-WHITE
 CONNECTOR: H-HOUSING
 TYPE CODE: PIN Q'PY: 04~32
 MALE FEMALE: ROW NO: 2-DOUBLE ROW

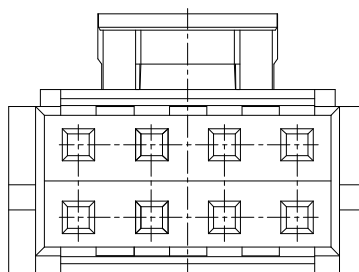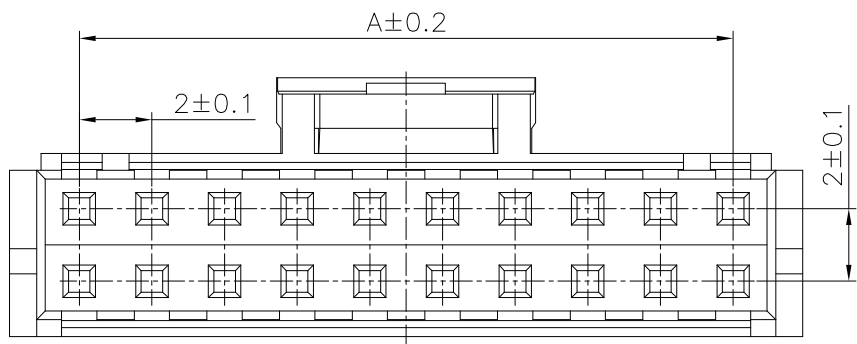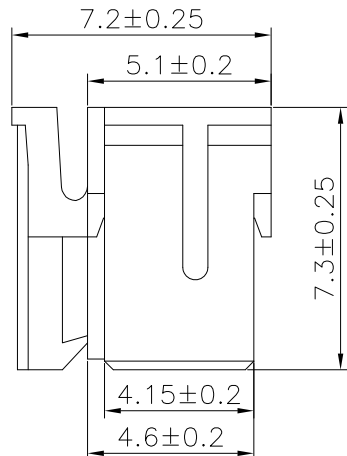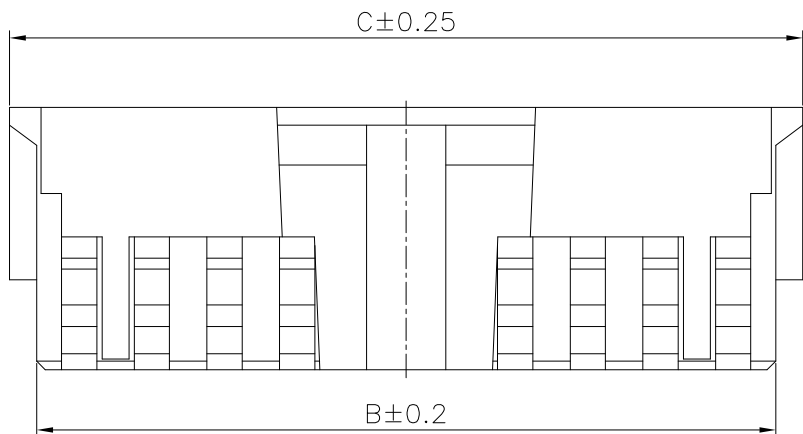

2P-4P结构样式

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*02	2.00	4.50	5.90	2*10	18.00	20.50	21.90
2*03	4.00	6.50	7.90	2*11	20.00	22.50	23.90
2*04	6.00	8.50	9.90	2*12	22.00	24.50	25.90
2*05	8.00	10.50	11.90	2*13	24.00	26.50	27.90
2*06	10.00	12.50	13.90	2*14	26.00	28.50	29.90
2*07	12.00	14.50	15.90	2*15	28.00	30.50	31.90
2*08	14.00	16.50	17.90	2*16	30.00	32.50	33.90
2*09	16.00	18.50	19.90				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	22.10.28	LINEAR	ANGLES	1:1	Wang_jr	22.10.28	A2006H1M-2XXX0	ENDE05
			0.0±0.35	X°REF±6°	APPROVED	Han_Gao	22.10.28	TITLE:	 WanLian Technology Co., Ltd REV: A0 SHEET: 1/1
			0.00±0.25	X°±3°	DESIGNER	LanXuan_Hou	22.10.28	Pitch2.0mm PHD双排带扣 Housing 无卤	
			0.000±0.10	X°X' ±2°	DRAWN				