

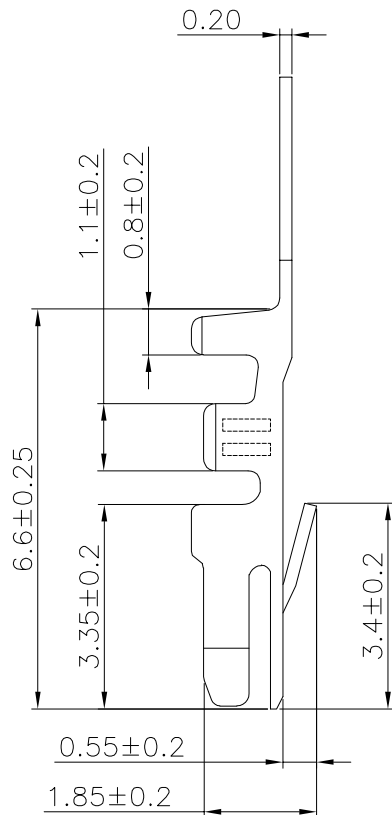



The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS


NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.TERMINAL: PHOSPHOR BRONZE
 2.PLATING SPECIFICATION:
 2-1.TERMINAL:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 1.5KGF/Pin Min
 3-2.DURABILITY: 50 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 250V AC/DC
 4-2.CONTACT RESISTANCE: 10 mΩ MAX
 4-3.INSULATION RESISTANCE: 1000MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 800V AC
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 6.PACKAGE SPEC : REEL
 7.P/N:
 A2006 T 1 F X-X
 SERIES NO: _____ PLATING:
 A-ALL AU G/F
 C-BRIGHT TIN
 D-MATTE TIN
 CONNECTOR: _____
 T-TERMINAL
 TYPE CODE _____
 MALE FEMALE: _____ METAL:
 F-FEMALE P-PHOSPHOR BRONZE
 M-MALE B-BRASS

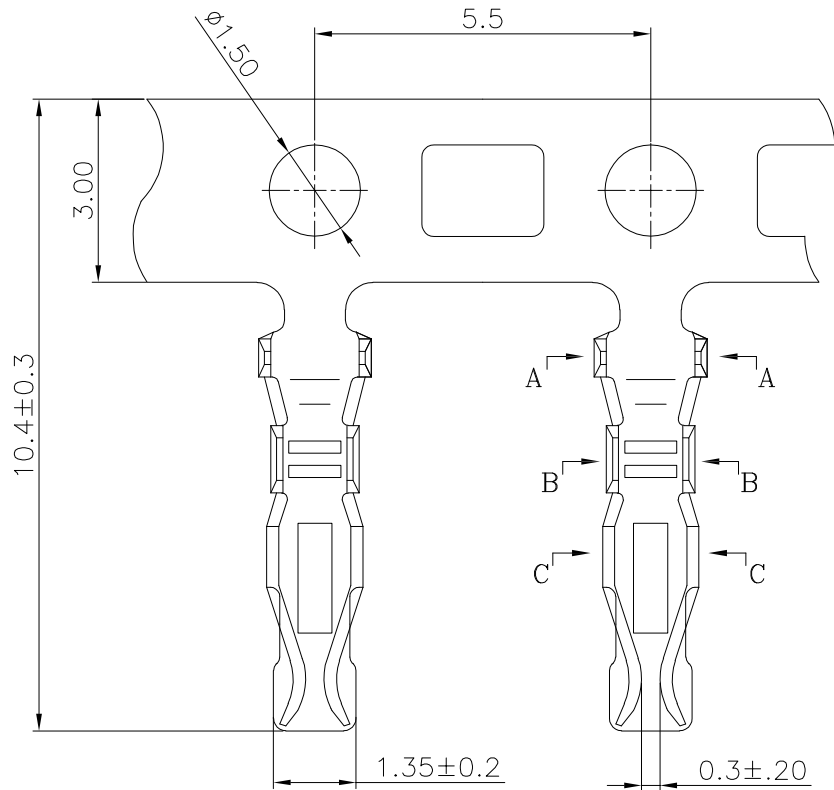

SEC: A-A



SEC: B-B



SEC: C-C

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A2006T1FX-X	ENDE05	
			0.0±0.35	X'REF±6'	DESIGNER	Han_Gao	22.10.28	TITLE:			
			UNIT:mm	X'±3'	DRAWN	LanXuan_Hou	22.10.28	Pitch 2.0 mm 无logo端子 AWG#24~#28			
			SIZE: A4	0.000±0.10	X'X' ±2'					REV: A0	SHEET: 1/1