

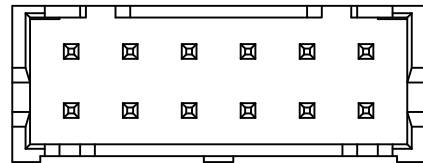
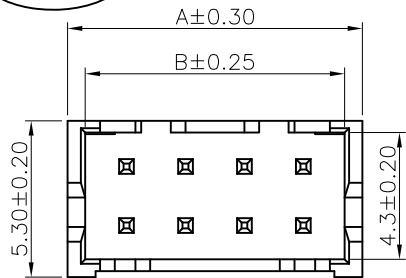





The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

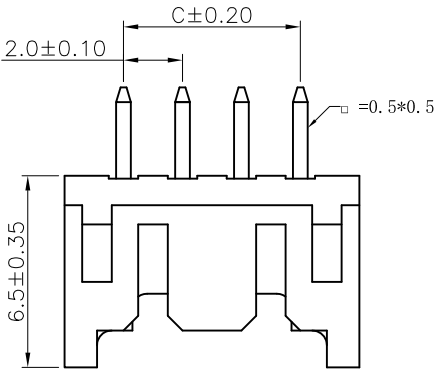

12P-40P有加强筋
4P-10P无加强筋



3D VIEW

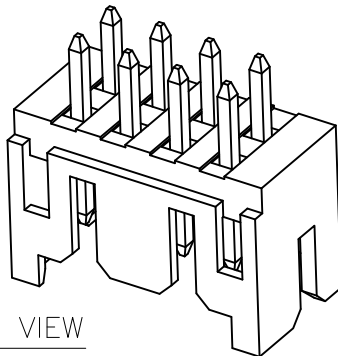

- NOTE:
- MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA46/PA66
 - 1-2.CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - 2-1.CONTACTS:SN/AU PLATED OVER ALL.
 - MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 1.5KGF/pin min
 - 3-2.DURABILITY: 50 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 3.0A
 - 4-2.VOLTAGE RATING: 250V MAX
 - 4-3.CONTACT RESISTANCE: 10mΩ Max.
 - 4-4.INSULATION RESISTANCE: 1000MΩ MIN
 - 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 800V AC Min
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - PACKAGE SPEC: PE BAG
 - P/N ORDER:



SERIES NO: A2006 W 0-2 XX 1 X X X

CONNECTOR: W-WAFER

ANGLE: 0-180°

ROW NO: 2-DOUBLE ROW

PIN Q'PY: 04~40

WATER CODE
1-PA66,UL94V-0
2-PA46,UL94V-0

COLOR:
A-BLACK
K-WHITE
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN

TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuit	A	B	C	Circuit	A	B	C
2*02	6.00	4.90	2.00	2*12	26.00	24.90	22.00
2*03	8.00	6.90	4.00	2*13	28.00	26.90	24.00
2*04	10.00	8.90	6.00	2*14	30.00	28.90	26.00
2*05	12.00	10.90	8.00	2*15	32.00	30.90	28.00
2*06	14.00	12.90	10.00	2*16	34.00	32.90	30.00
2*07	16.00	14.90	12.00	2*17	36.00	34.90	32.00
2*08	18.00	16.90	14.00	2*18	38.00	36.90	34.00
2*09	20.00	18.90	16.00	2*19	40.00	38.90	36.00
2*10	22.00	20.90	18.00	2*20	42.00	40.90	38.00
2*11	24.00	22.90	20.00				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	Wang_jr	23.9.8	A2006W0-2XX1XXX	ENDE05	
A1	PART NUMBER RENEWAL	23.9.8	0.0±0.35	X'REF±6°	APPROVED	Han_Gao	23.9.8	TITLE:		
			0.00±0.25	X'±3°	DESIGNER	Zijun_Huang	23.9.8	Pitch 2.0mm 180°PHD双排DIP型 Wafer		
			UNIT:mm	X'X' ±2°	DRAWN					REV: A1 SHEET: 1/1