
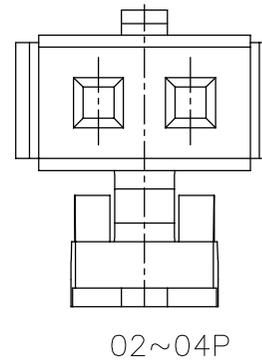
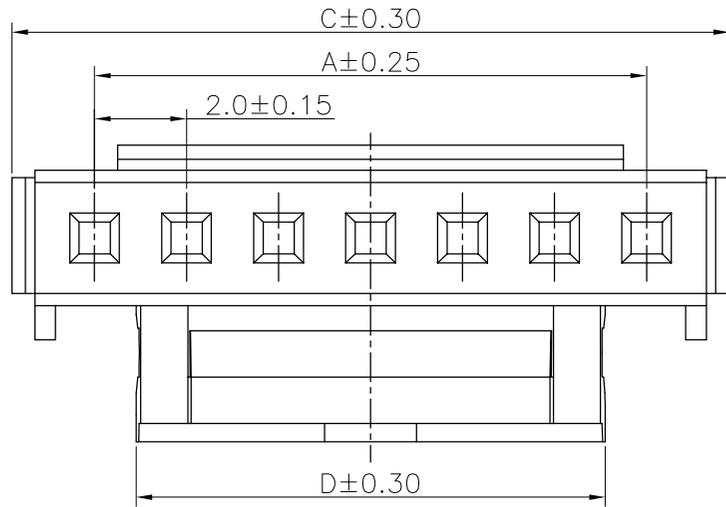
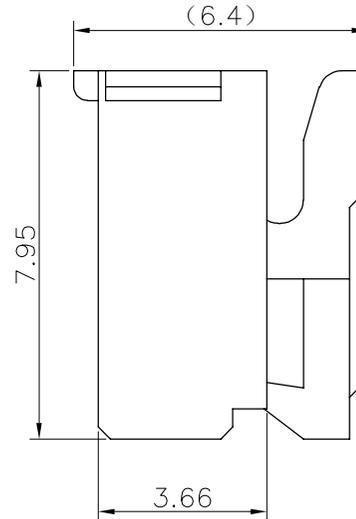


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

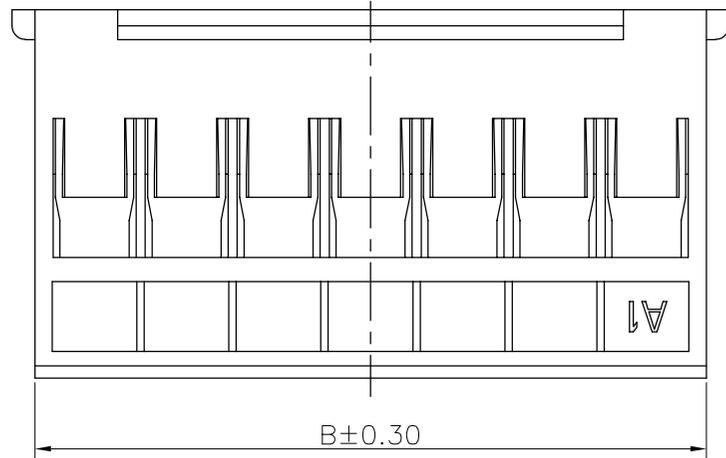

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA66,UL94V-0
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 2A AC/DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 1000V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

SERIES NO: A2008 H 2 M-1 XX X 0
 CONNECTOR: H HOUSING
 TYPE CODE: M-MALE
 COLOR: A-BLACK (ROHS+HF), M-BEIGE(高温料) ROHS, K-WHITE (ROHS+HF)
 PIN Q'PY: 02~20
 ROW NO: 1-SINGLE ROW

Circuits	Dimensions(mm)			
	A	B	C	D
02	2.00	4.60	5.60	3.20
03	4.00	6.60	7.60	4.00
04	6.00	8.60	9.60	5.00
05	8.00	10.60	11.60	6.20
06	10.00	12.60	13.60	8.20
07	12.00	14.60	15.60	10.20
08	14.00	16.60	17.60	12.20
09	16.00	18.60	19.60	14.20
10	18.00	20.60	21.60	16.20
11	20.00	22.60	23.60	18.20
12	22.00	24.60	25.60	20.20
13	24.00	26.60	27.60	22.20
14	26.00	28.60	29.60	24.20
15	28.00	30.60	31.60	26.20
16	30.00	32.60	33.60	28.20
17	32.00	34.60	35.60	30.20
18	34.00	36.60	37.60	32.20
19	36.00	38.60	39.60	34.20
20	38.00	40.60	41.60	36.20

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.10.28	 UNIT:mm SIZE: A4	LINEAR	1:1	Wang_jr	22.10.28	A2008H2M-1XXX0	ENDE05	
				ANGLES	APPROVED					
				0.0±0.35	X'REF±6°					DESIGNER
				0.00±0.25	X'±3°					DRAWN
				0.000±0.10	X'X'±2°	Han_Gao	22.10.28	TITLE: Pitch2.00mm HY单排带扣 Housing 高温料 米黄色		
						LanXuan_Hou	22.10.28	REV: A0	SHEET: 1/1	

