
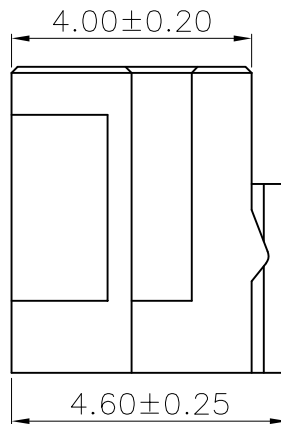
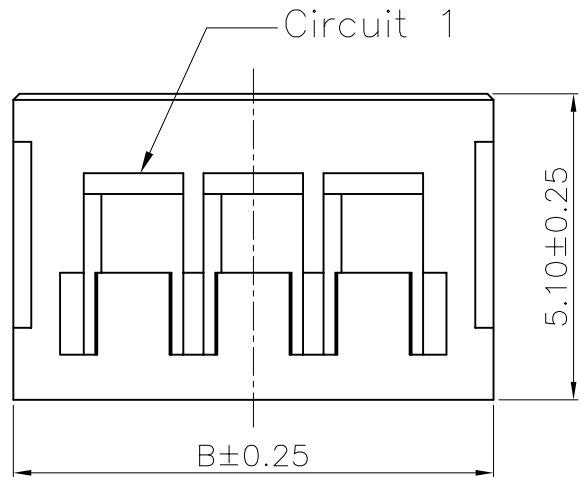


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

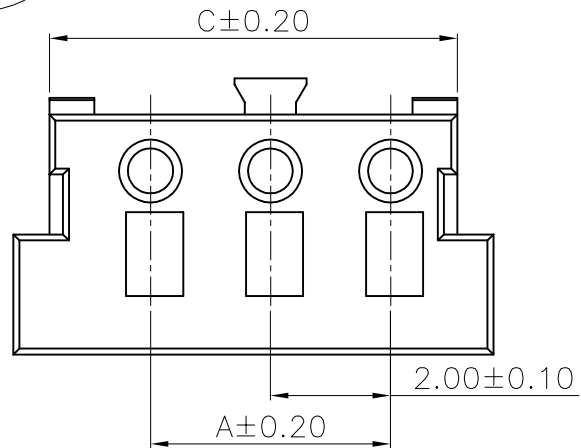

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTION FORCE: 1.5kgf/pin min
 - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1. RATED CURRENT : 4A
RATED VOLTAGE : 125V
 - 3-2.INSULATION RESISTANCE: 1000MΩ MIN
 - 3-3.CONTACT RESISTANCE :10mΩ MAX
 - 3-4.WITHSTANDING VOLTAGE: 1000V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
5. PACKAGE SPEC: PE BAG
- 6.P/N:

A2010 H M-1 XX X 0

SERIES NO: H M-1 XX X 0

CONNECTOR: H M-1 XX X 0

MALE FEMALE: M-1 XX X 0

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
02~15

ROW NO:
1-SINGLE ROW

Orderin Information & Dimensions

PART NO.	Dimensions		
	A	B	C
02	2.00	6.00	4.80
03	4.00	8.00	6.80
04	6.00	10.00	8.80
05	8.00	12.00	10.80
06	10.00	14.00	12.80
07	12.00	16.00	14.80
08	14.00	18.00	16.80
09	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1					
			0.00±0.25	X'±3'			Han_Gao	21.01.13	A2010HM-1XXX0		
			0.00±0.10	X'X' ±2'			Zijun_Huang	21.01.13			