
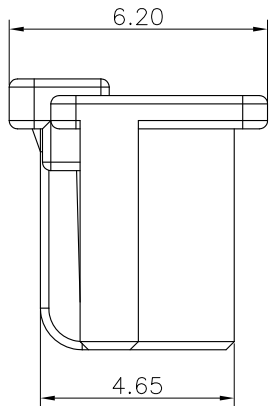


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

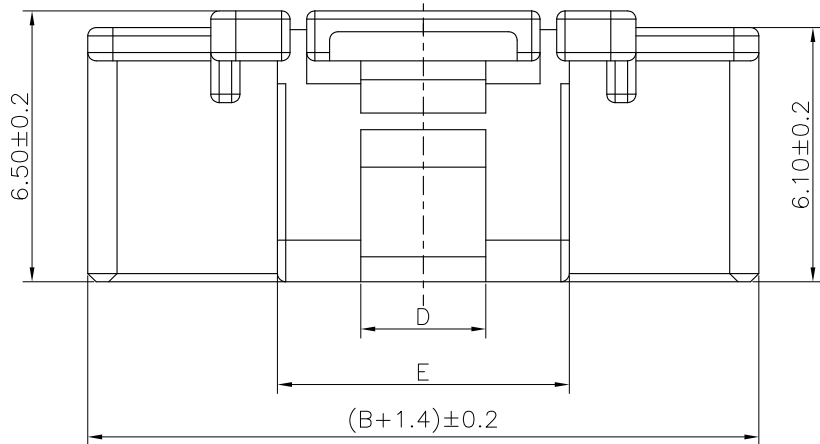

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PBT,UL94V-0
- 2.MECHANICAL PERFORMANCE:
  - 2-1.RETENTIVITY FORCE: 1.0KGF/pin min
  - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 3A
  - RATED VOLTAGE : 125V AC/DC
  - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: PE BAG
- 7.P/N:

A2023 H M-1 XX X 0

SERIES NO:




COLOR:  
A-BLACK  
S-NATURE

CONNECTOR:  
H-HOUSING


PIN Q' PY:  
02~15

MALE FEMALE:  
M-MALE


ROW NO:  
1-SINGLE ROW

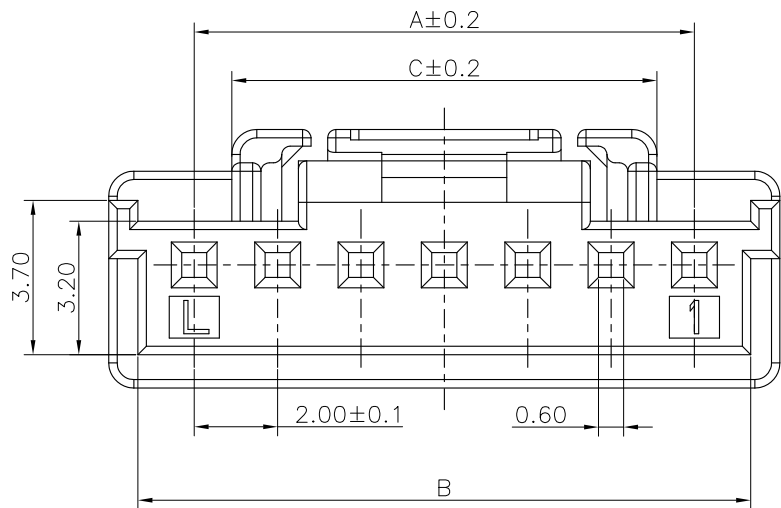

2PIN 有凸台



3~15PIN 无凸台



A1

Circuit	Dimensions					Circuit	Dimensions				
	A	B	C	D	E		A	B	C	D	E
02	2.00	4.70	8.00	2.00	4.70	09	16.00	18.70	10.20	3.00	7.00
03	4.00	6.70	8.10	2.20	4.90	10	18.00	20.70			
04	6.00	8.70	10.10	3.00	7.00	11	20.00	22.70			
05	8.00	10.70	10.20			3.00	7.00	12			
06	10.00	12.70		13	24.00			26.70			
07	12.00	14.70	14	26.00	28.70						
08	14.00	16.70	15	28.00	30.70						

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.12	LINEAR	ANGLES	1:1	Wang_jr	21.10.12	A2023HM-1XXX0	ENDE05	
A1	DIM"E"CHANGE	23.08.07	0.0±0.35	X'REF±6°	APPROVED	Han_Gao	21.10.12	Pitch2.00mm MX单排带扣Housing	REV: A1 SHEET: 1/1	
			UNIT: mm	X'±3°	DESIGNER	Zijun_Huang	21.10.12			
			SIZE: A4	X'X' ±2°	DRAWN					