

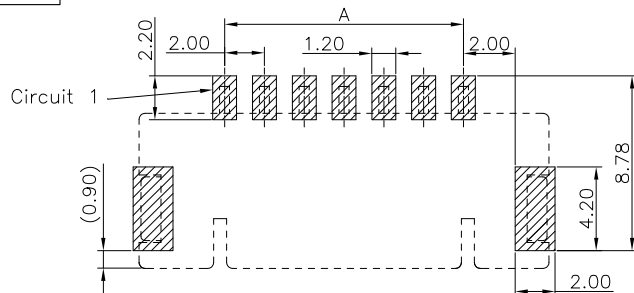
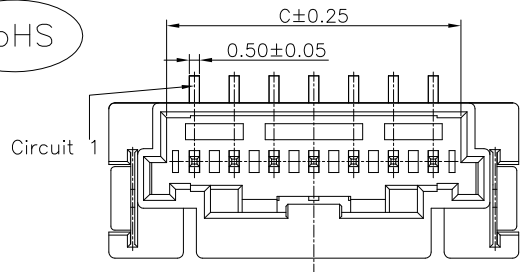
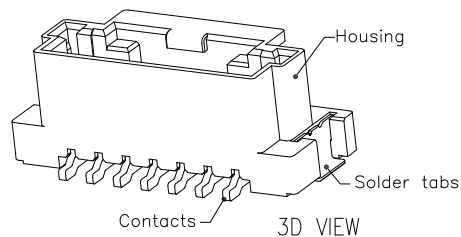
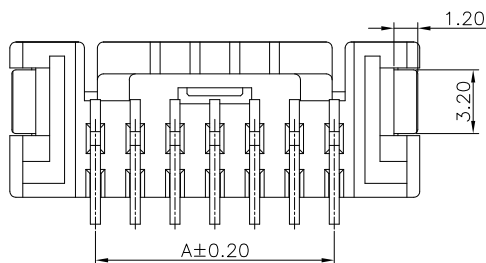


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS



SUGGESTED PCB LAYOUT

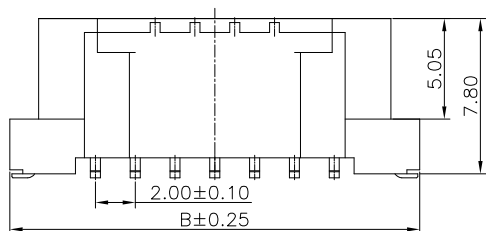

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING: PA9T/LCP,UL94V-0
- 1-2.CONTACTS: PHOSPHOR BRONZE
- 1-3.SOLDER TABS: BRASS

2.PLATING SPECIFICATION:

- 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 2-1.SOLDER TABS: TIN/GOLD FLASH PLATED OVER ALL.



3.MECHANICAL PERFORMANCE:

- 3-1.RETENTIVITY FORCE: 1.0KGF/pin min
- 3-2.DURABILITY: 50 CYCLES.

4.ELECTRICAL PERFORMANCE:

- 4-1.CURRENT RATING: 3A
- RATED VOLTAGE : 125V AC/DC
- 4-2.CONTACT RESISTANCE: 10 mΩ MAX
- 4-3.INSULATION RESISTANCE: 1000MΩ Min
- 4-4.DIELECTRIC WITHSTANDING : 500V
- 5.ENVIRONMENTAL PERFORMANCE:
- 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC:500PCS/REEL

7.P/N:

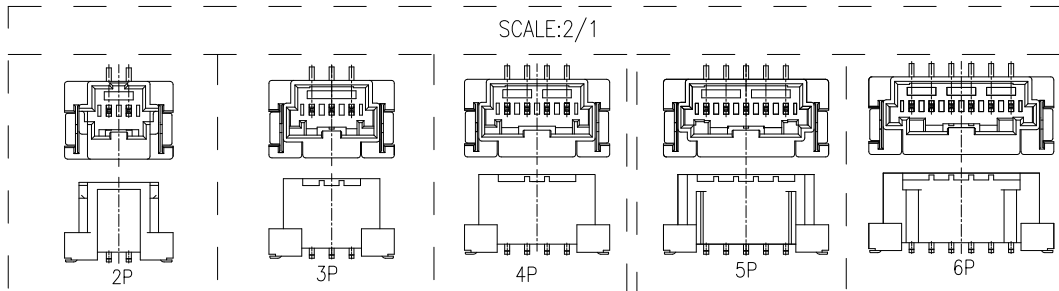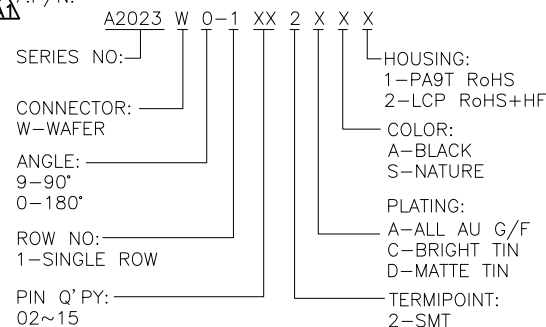


Circuit	Dimensions			Circuit	Dimensions		
	A	B	C		A	B	C
02	---	10.90	4.80	09	16.00	24.60	18.80
03	4.00	12.60	6.80	10	18.00	26.60	20.80
04	6.00	14.60	8.80	11	20.00	28.60	22.80
05	8.00	16.60	10.80	12	22.00	30.60	24.80
06	10.00	18.60	12.80	13	24.00	32.60	26.80
07	12.00	20.60	14.80	14	26.00	34.60	28.80
08	14.00	22.60	16.80	15	28.00	36.60	30.80

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: A2023W0-1XX2XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.12	LINEAR	ANGLES	1:1	APPROVED	Wang_jr				23.9.11
A1	PART NUMBER RENEWAL	23.9.11	0.0±0.35	X'REF±6°		DESIGNER	Han_Gao	23.9.11			
			UNIT: mm	X'±3°		DRAWN	Zijun_Huang	23.9.11	TITLE: Pitch2.00mm 180°MX单排带扣立贴Wafer	REV: A1	SHEET: 1/2
			SIZE: A4	X'X' ±2°							



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

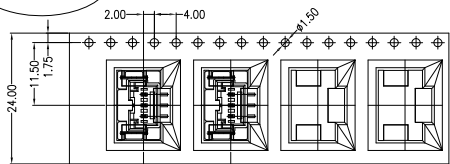




02~03 CONTACTS

产品引出方向

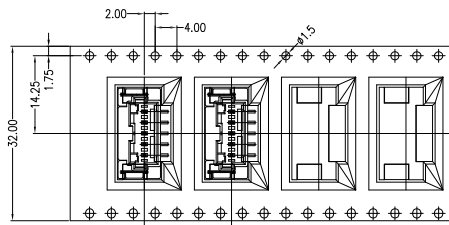


04~06 CONTACTS

产品引出方向

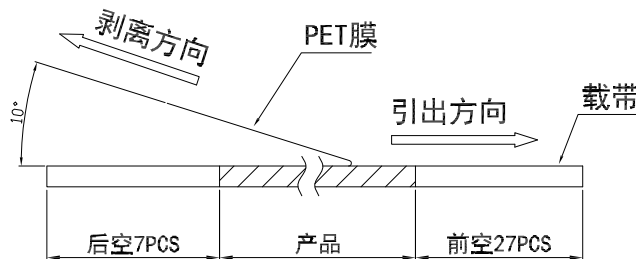

(PET膜剥离示意图)

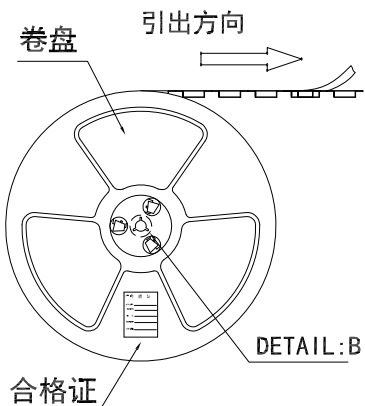

合格证



DETAIL: B

2.0±0.50


∅13.0±0.50

DETAIL: B

10±0.50




装*盘(参考列表一)

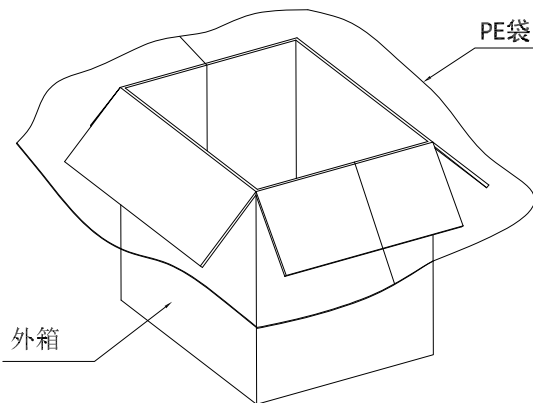

外箱

PE袋

合格证

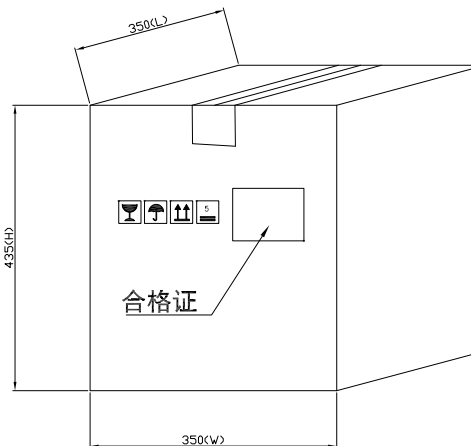

包装说明:

- 把成品包入卷盘中, 每盘装500PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证。
- 所有材料有害物控制需符合RoHS标准。

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Pac J (Reel/Caton)
02~03 PIN	-	24	500PCS	15/Reel
04~06 PIN	-	32	500PCS	11/Reel

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd REV: A1 SHEET: 2/2
AO	NEW RELEASE	21.10.12		LINEAR	1:1	APPROVED	23.9.11	A2023W0-1XX2XXX	ENDE05	
A1	PART NUMBER RENEWAL	23.9.11		ANGLES		DESIGNER	23.9.11			
			UNIT: mm	0.00±0.25	X'±3'	DRAWN	23.9.11	TITLE:		
			SIZE: A4	0.000±0.10	X'X' ±2'			包装规范		