
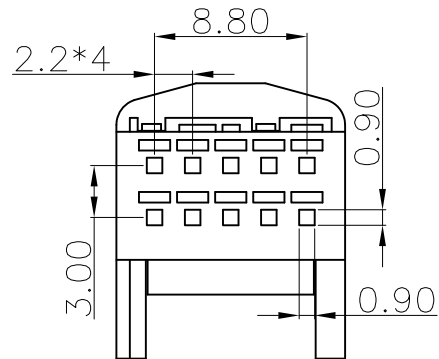
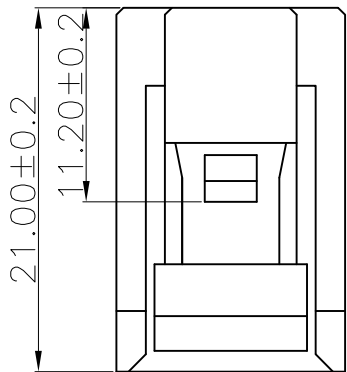
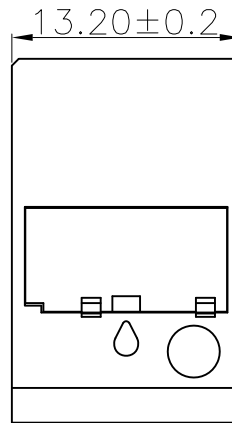
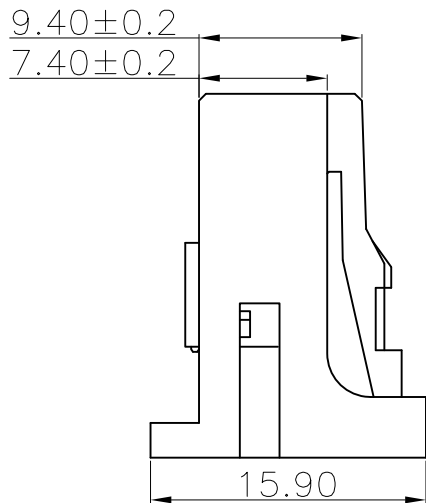


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF



NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PBT,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.INSERTION FORCE: 1KGF/PIN MAX
 - 2-2.REMOVAL FORCE: 3KGF/PIN MIN
 - 2-3.DURABILITY: 25 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1. RATED CURRENT : 10A
 - RATED VOLTAGE : 250V
 - 3-2.INSULATION RESISTANCE: 1000MΩ MIN
 - CONTACT RESISTANCE : 30mΩ MAX
 - 3-3.WITHSTANDING VOLTAGE:1500V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+90°C.
- 5.PACKAGE SPEC:PE BAG
- 6.P/N:

A2201 H M-2 10 X 0

SERIES NO: _____

CONNECTOR: _____

MALE FEMALE: _____

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
02~16

ROW NO:
2-DOUBLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	A2201HM-210X0	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: PITCH 2.20mm 公胶壳		REV: A0 SHEET: 1/1	
			0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.01.13				
			UNIT:mm	X°X' ±2°							
			SIZE: A4	0.000±0.10							