
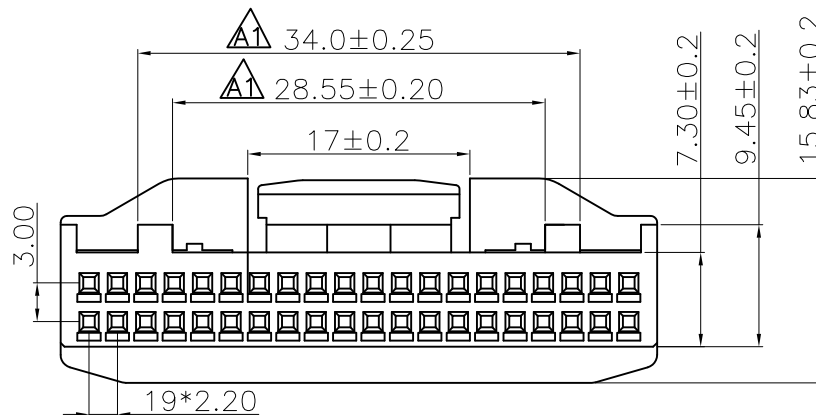




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

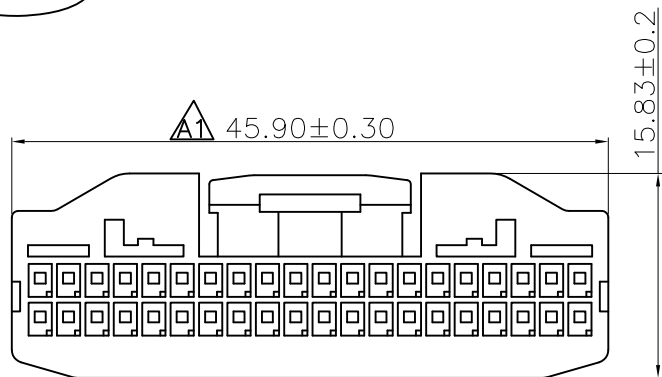

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING:PBT,UL94V-0
 - 2.MECHANICAL PERFORMANCE:
2-1.INSERTION FORCE: 1KGF/PIN MAX
2-2.REMOVAL FORCE: 3KGF/PIN MIN
2-3.DURABILITY: 25 CYCLES.
 - 3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
3-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
3-3.WITHSTANDING VOLTAGE:1500V AC
 - 4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+90°C.
 - 5.PACKAGE SPEC:PE BAG
 - 6.P/N: A2201 H M-2 40 X 0
- SERIES NO: [] COLOR:
A-BLACK
K-WHITE
S-NATURE
- CONNECTOR: [] PIN Q'PY:
H-HOUSING 02~40
MALE FEMALE: [] ROW NO:
M-MALE 2-DOUBLE ROW

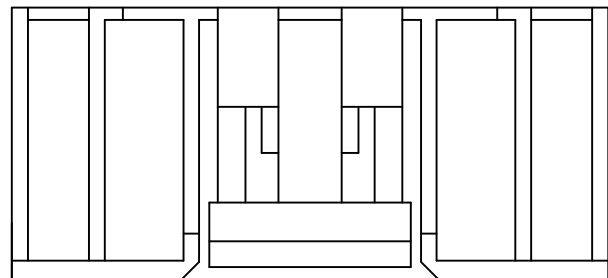

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.11.08	A2201HM-240X0	ENDE05	
A1	MODIFY THE SIZE ACCORDING TO THE ACTUAL OBJECT	23.11.08	0.00±0.25	X'±3°	DESIGNER	Han_Gao	23.11.08	TITLE: PITCH 2.20mm 公胶壳		REV: A1	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	23.11.08			