

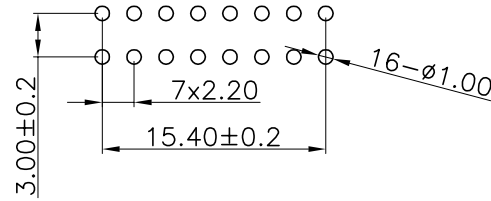

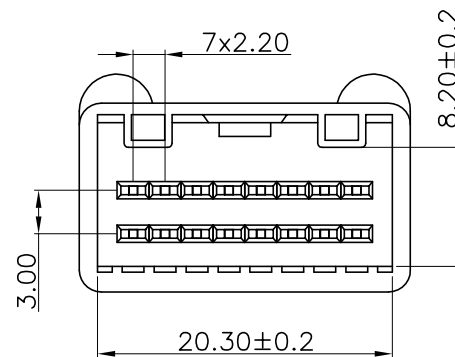


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

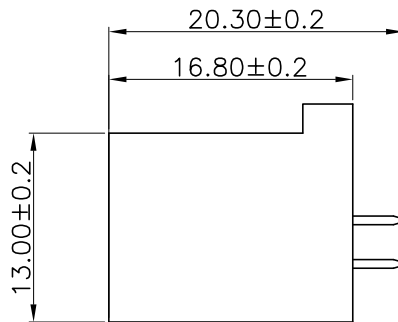

PCB Layout



NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING:PA66,UL94V-0
 - CONTACTS:BRASS H62
- PLATING SPECIFICATION:
 - CONTACTS:TIN PLATED ON CONTACT AREA.
- MECHANICAL PERFORMANCE:
 - INSERTION FORCE: 1KGF/PIN MAX
 - REMOVAL FORCE: 3KGF/PIN MIN
 - DURABILITY: 50 CYCLES.
- ELECTRICAL PERFORMANCE:
 - RATED CURRENT : 10A
RATED VOLTAGE : 250V
 - INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
 - WITHSTANDING VOLTAGE:1500V AC
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+90°C.
- PACKAGE SPEC:TRAY
- P/N:

$\triangle A1$ A2201 W 0-2 16 1 X X 0
 SERIES NO: _____
 CONNECTOR: _____
 W-WAFER
 ANGLE: _____
 0-180°
 ROW NO: _____
 2-DOUBLE ROW
 PIN Q'PY: _____
 16pin

COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PLATING:
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE Tin
 TERMIPOINT:
 1-DIP

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13		LINEAR	1:1	Wang_jr	23.10.07	A2201W0-2161XX0	ENDE05
A1	PART NUMBER RENEWAL	23.10.07		ANGLES	X'REF±6°				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	23.10.07	TITLE:
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	23.10.07	PITCH 2.20mm 180° 立插带扣 汽车连接器

WanLian Technology Co., Ltd

REV: A1 SHEET: 1/1