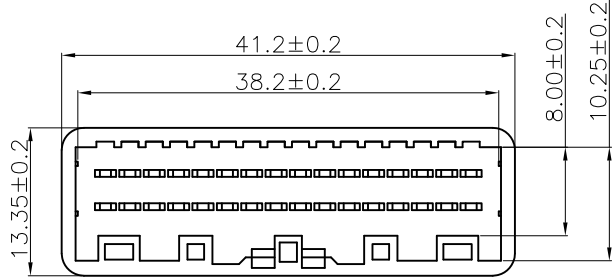
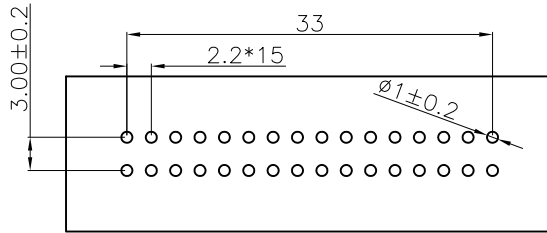
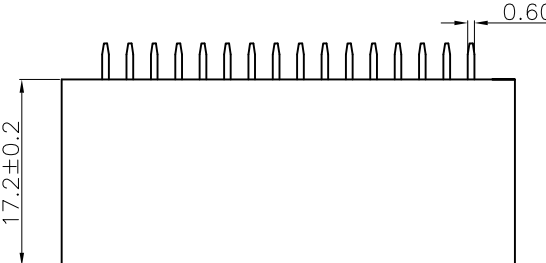

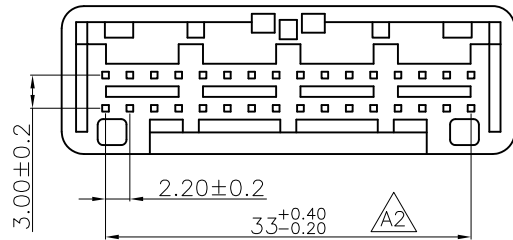


1	2	3	4	5	6	7	8								
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements															
A	RoHS+HF							A							
B				 PCB Layout		NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING:PA66,UL94V-0 1-2.CONTACTS:BRASS H62 2.PLATING SPECIFICATION: 2-1.CONTACTS:TIN PLATED ON CONTACT AREA. 3.MECHANICAL PERFORMANCE: 3-1.INSERTION FORCE: 1KGF/PIN MAX 3-2.REMOVAL FORCE: 3KGF/PIN MIN 3-3.DURABILITY: 50 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1. RATED CURRENT : 10A RATED VOLTAGE : 250V 4-2.INSULATION RESISTANCE: 1000MΩ MIN CONTACT RESISTANCE : 30mΩ MAX 4-3.WITHSTANDING VOLTAGE:1500V AC 5.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -40°C~+90°C. 6.PACKAGE SPEC:TRAY 7.P/N: A2201W0-2321XX0 SERIES NO: _____ CONNECTOR: _____ W-WAFER ANGLE: _____ 0-180° ROW NO: _____ 2-DOUBLE ROW COLOR: _____ K-WHITE PLATING: _____ C-BRIGHE TIN TERMIPOINT: _____ 1-DIP PIN Q'PY: _____ 02~40		B							
C								C							
D								D							
E								E							
F								F							
G						G									
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd			
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.08	A2201W0-2321XX0					
	A1	PART NUMBER RENEWAL	23.10.08		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.10.08	TITLE:					
	A2	MODIFIED DIMENSIONAL TOLERANCE	23.10.31		0.00±0.25	X°±3°	DRAWN	Zijun_Huang	23.10.08						
					UNIT:mm	0.00±0.25	X°±3°				PITCH 2.20mm 180° 立插带扣 汽车连接器		REV: A2	SHEET: 1/1	
				SIZE: A4	0.000±0.10	X°X' ±2°									
1	2	3	4	5	6	7	8								