

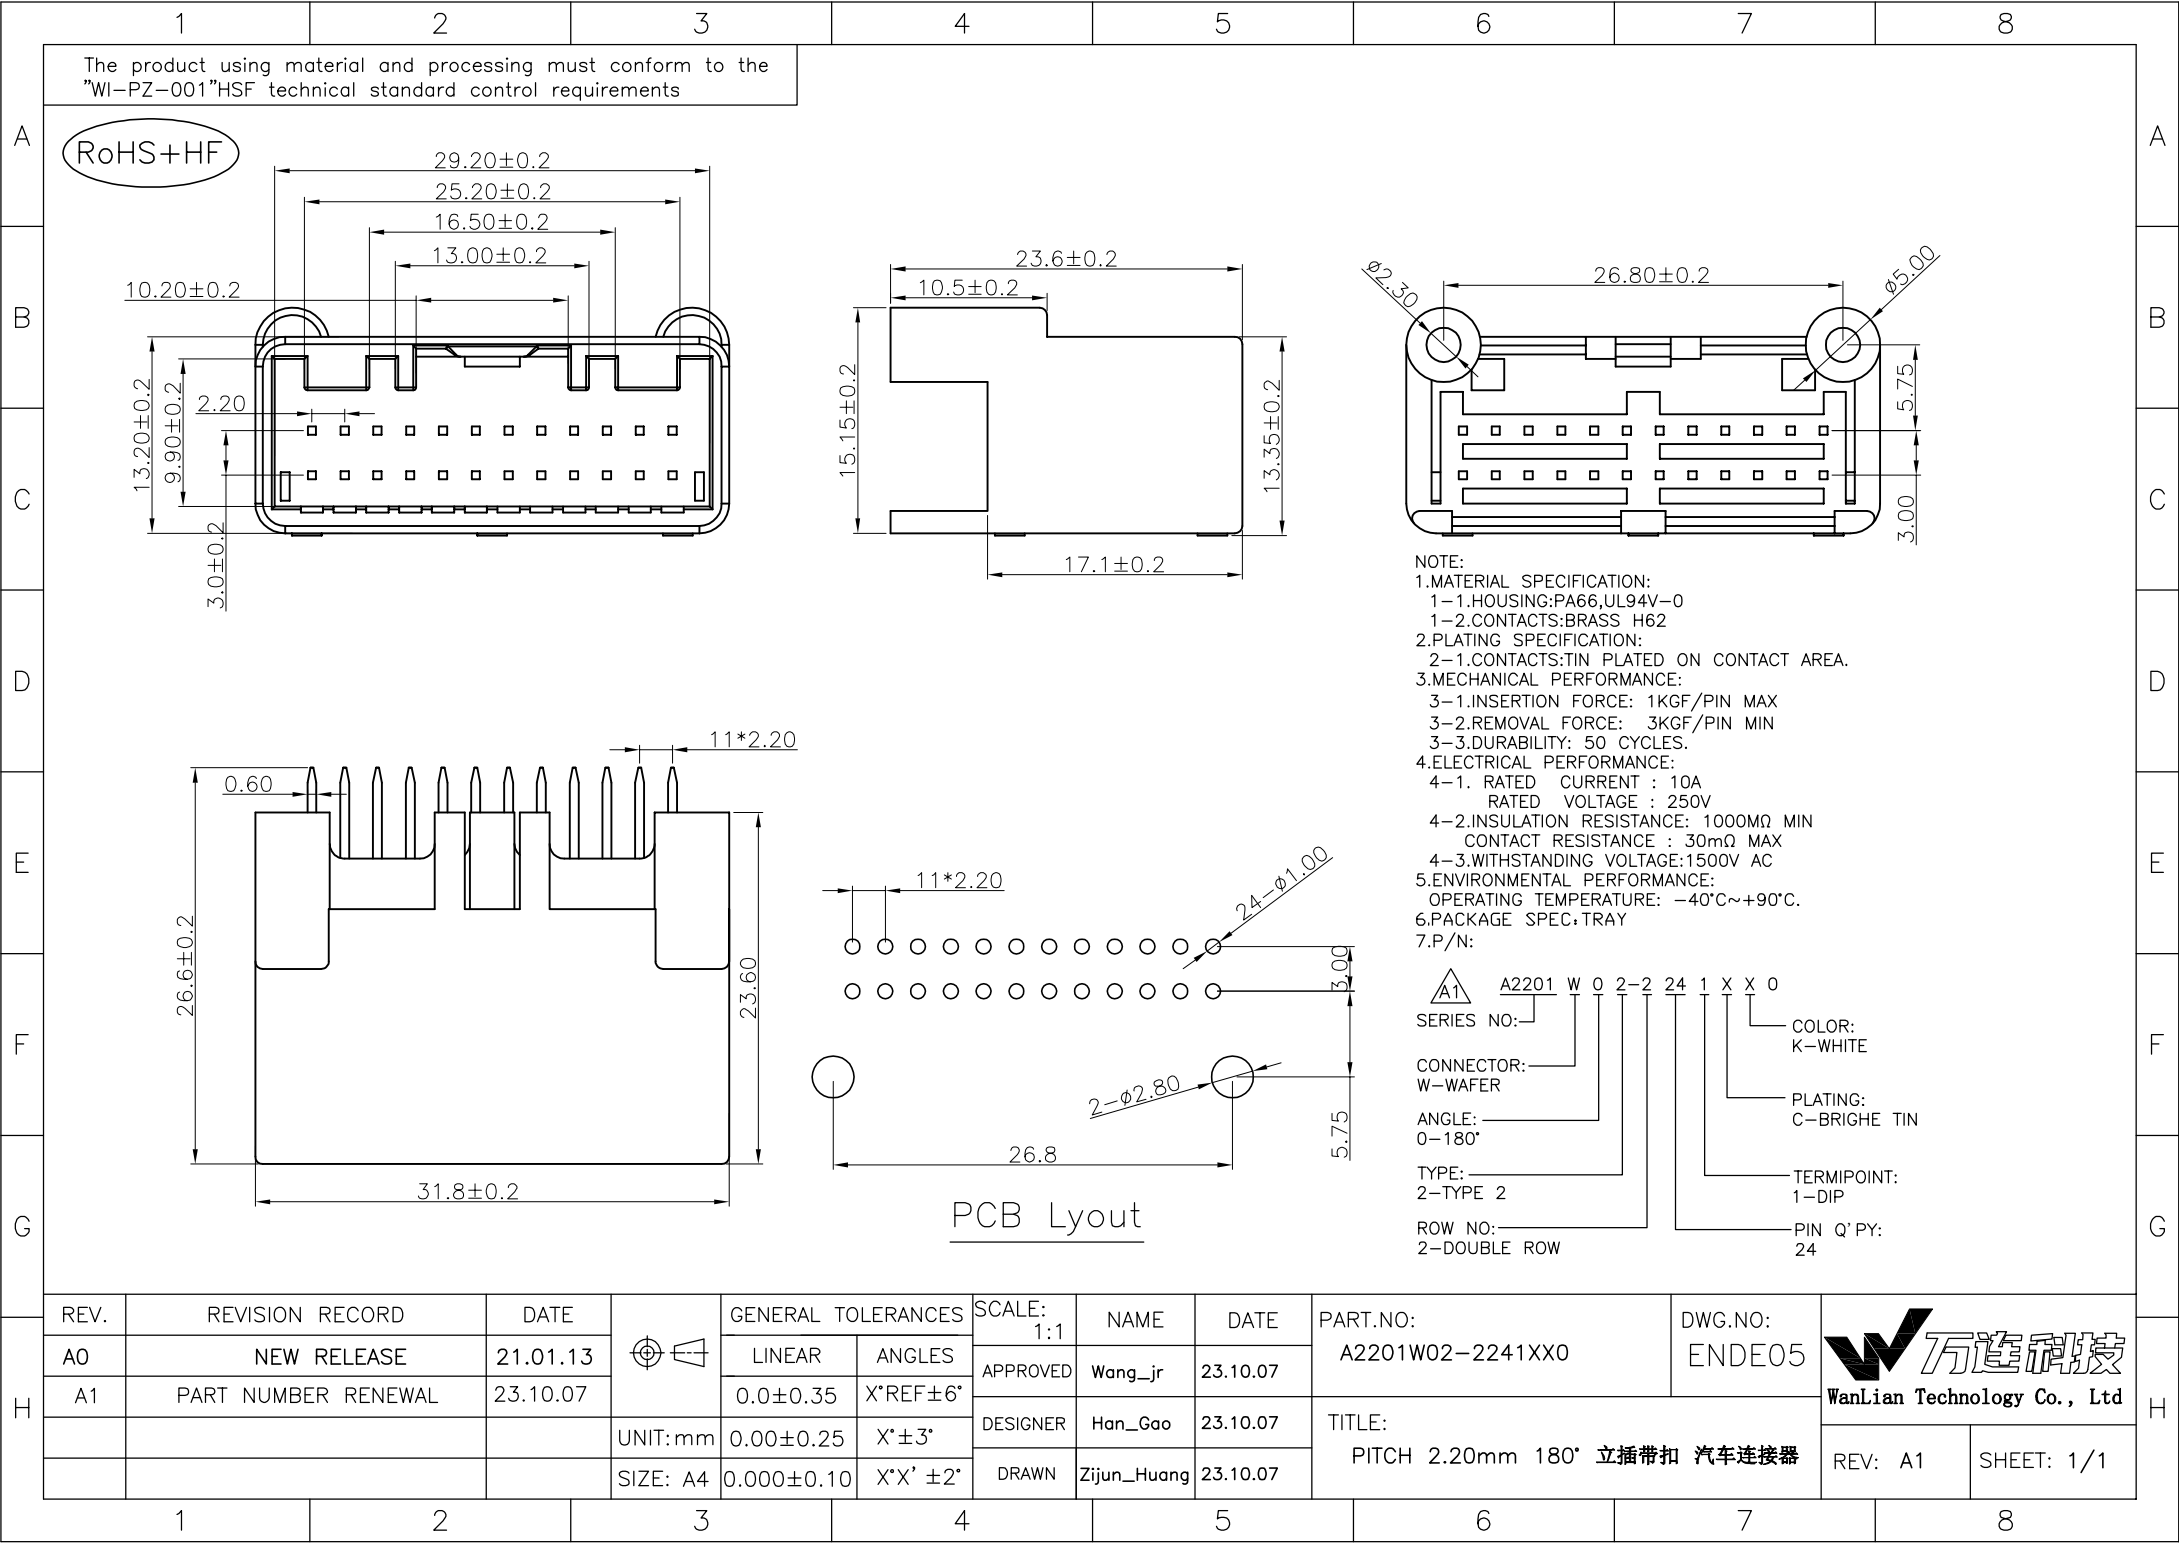
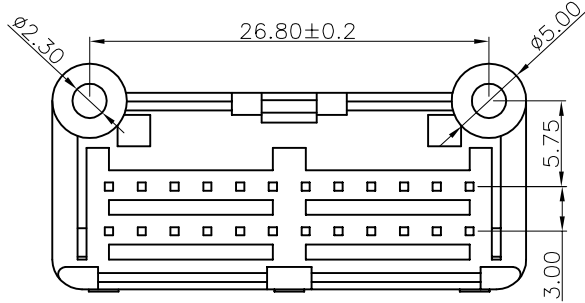


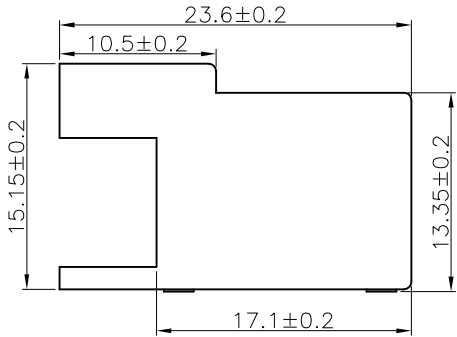



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

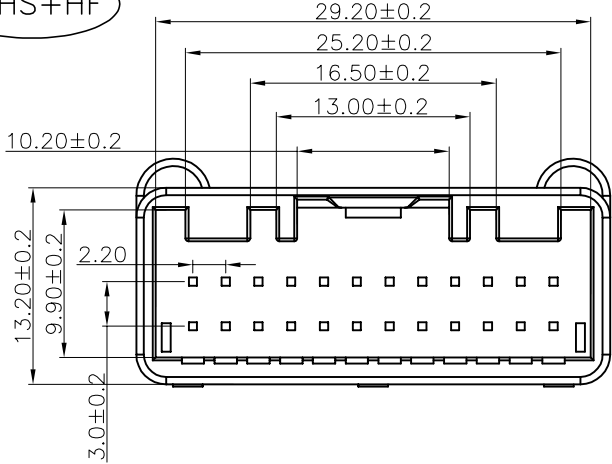

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PA66,UL94V-0
 - 1-2.CONTACTS:BRASS H62
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:TIN PLATED ON CONTACT AREA.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 1KGF/PIN MAX
 - 3-2.REMOVAL FORCE: 3KGF/PIN MIN
 - 3-3.DURABILITY: 50 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1. RATED CURRENT : 10A
 - 4-2.INSULATION RESISTANCE: 1000MΩ MIN
 - 4-3.WITHSTANDING VOLTAGE:1500V AC
 - 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+90°C.
 - 6.PACKAGE SPEC:TRAY
 - 7.P/N:

A1
SERIES NO: A2201 W 0 2-2 24 1 X X 0
CONNECTOR: W-WAFER
ANGLE: 0-180°
TYPE: 2-TYPE 2
ROW NO: 2-DOUBLE ROW
COLOR: K-WHITE
PLATING: C-BRIGHE TIN
TERMIPOINT: 1-DIP
PIN Q'PY: 24

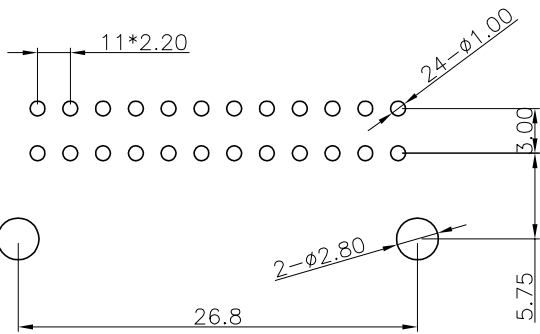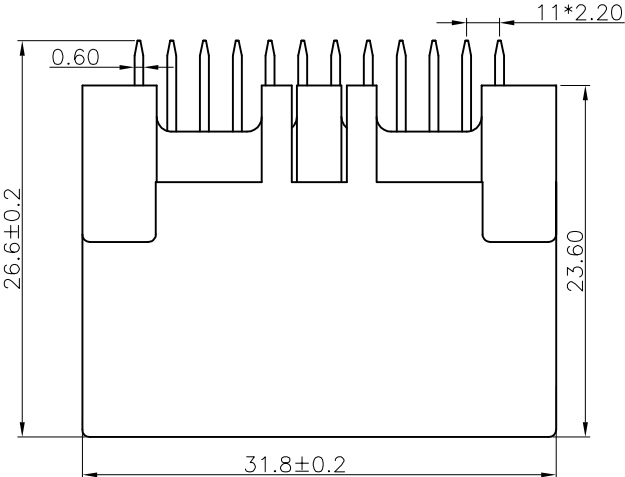

PCB Layout

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2201W02-2241XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.07				
A1	PART NUMBER RENEWAL	23.10.07		0.0±0.35	X°REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 180° 立插带扣 汽车连接器			
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	23.10.07				
												REV: A1