


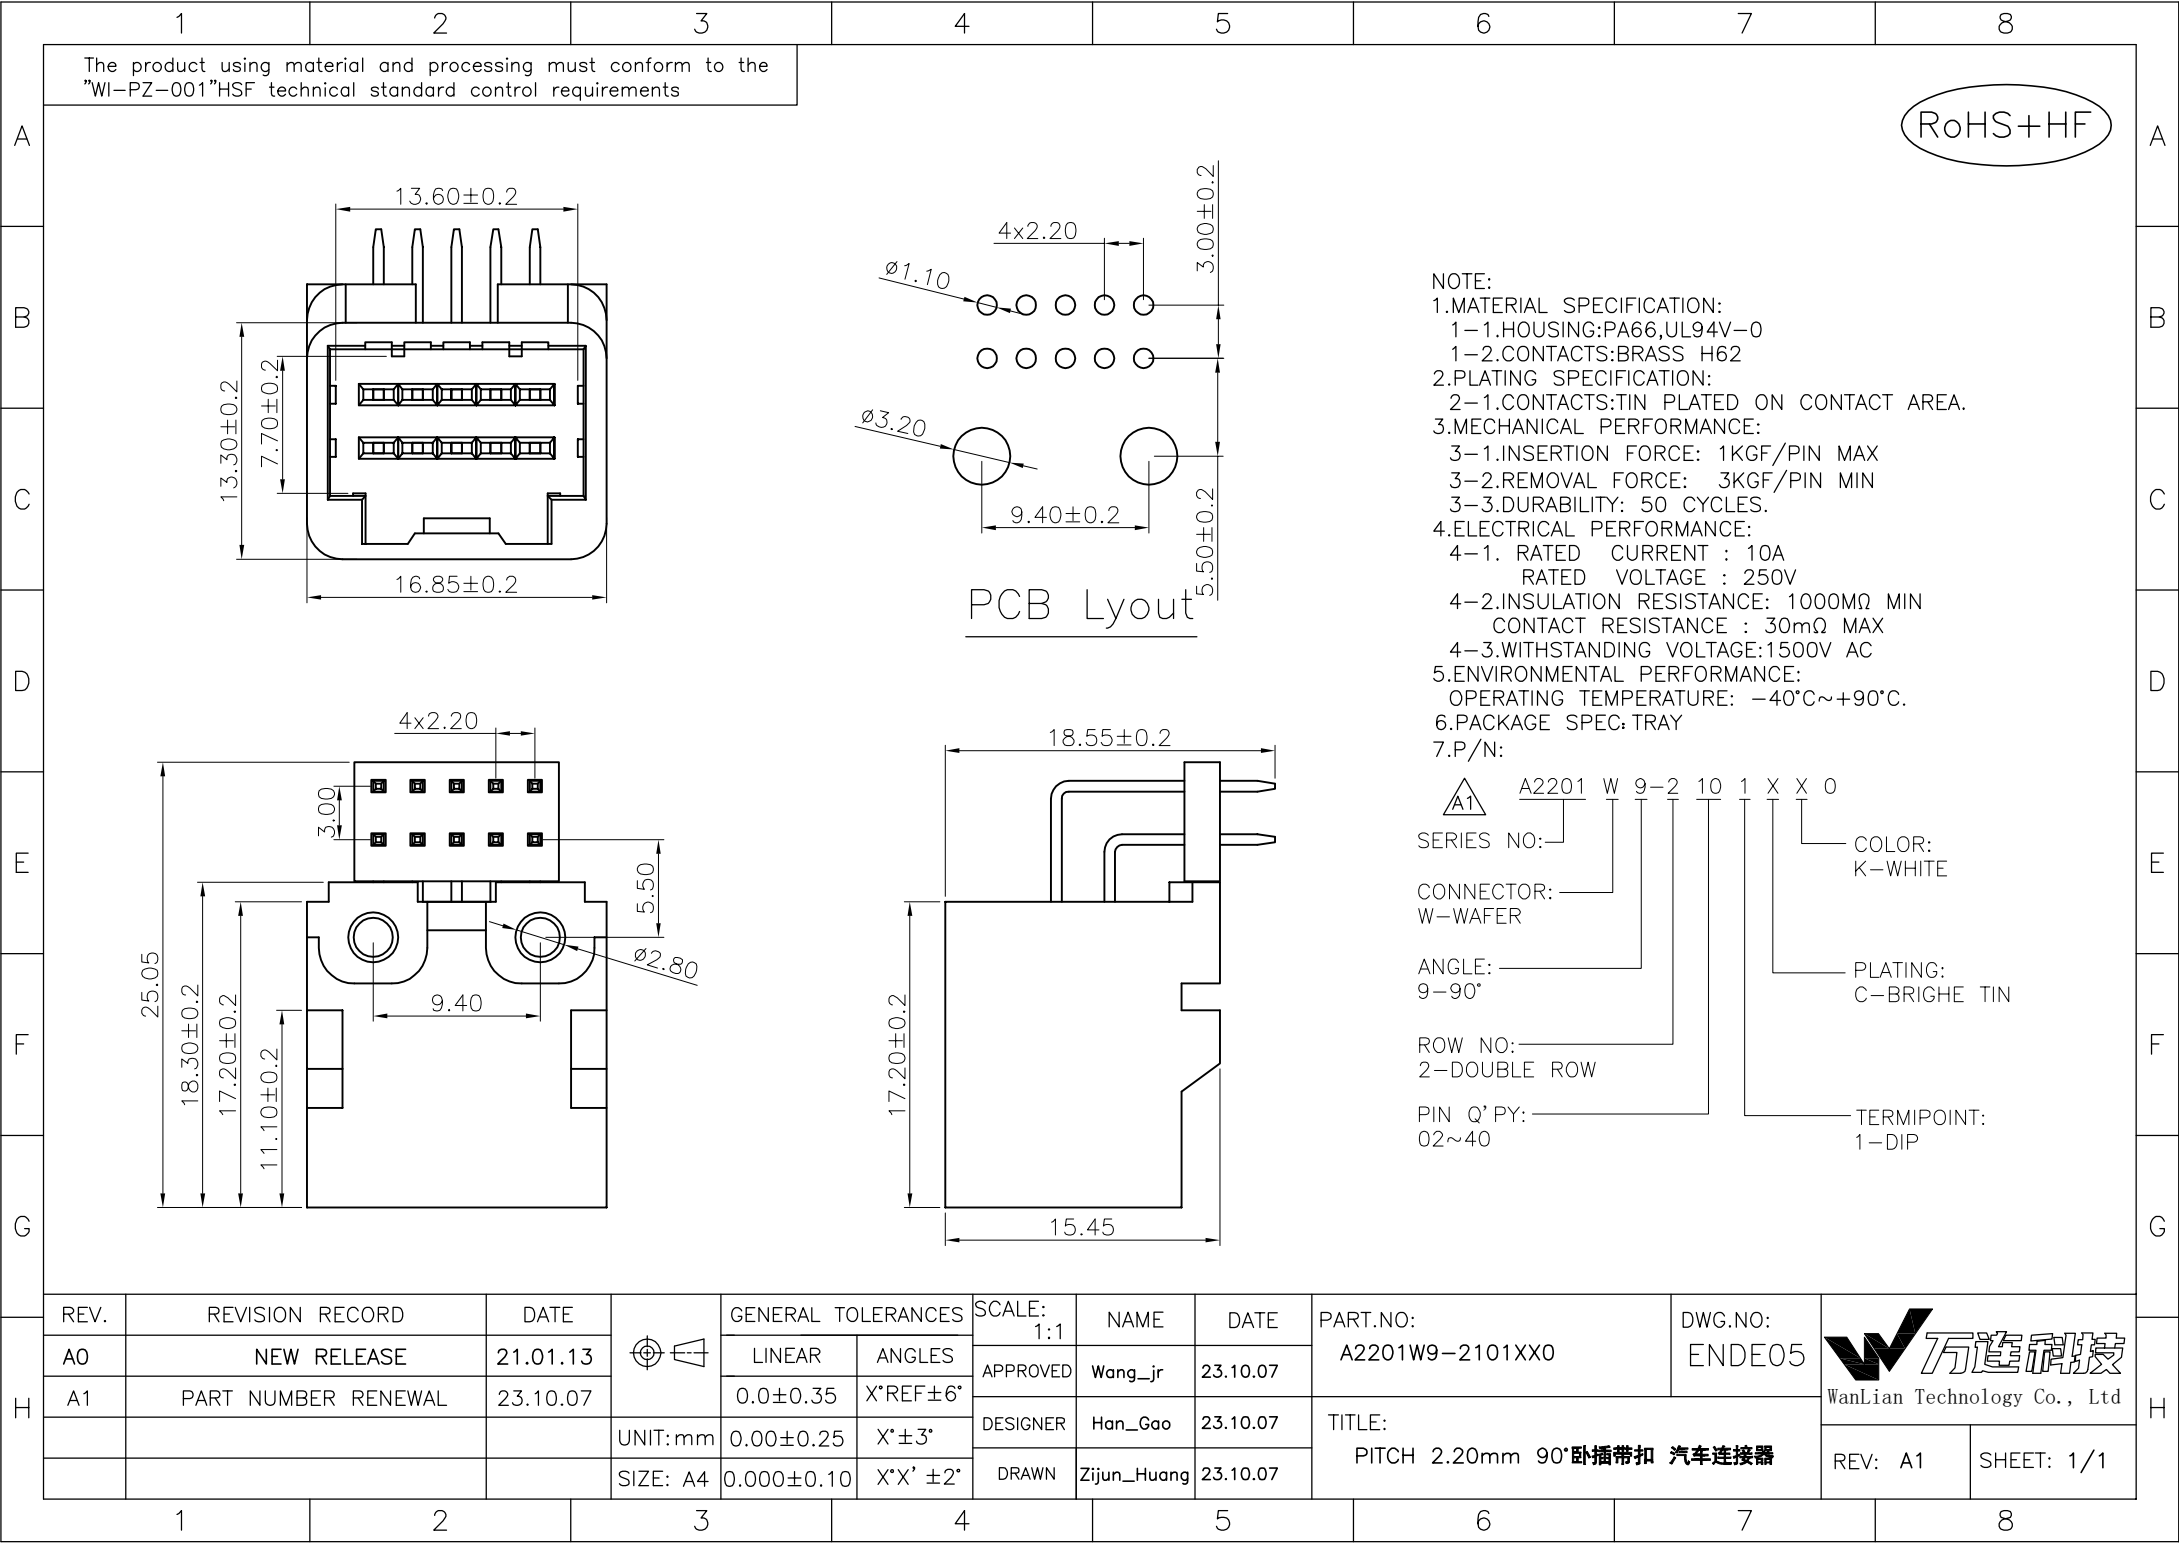

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PA66,UL94V-0
 - 1-2.CONTACTS:BRASS H62
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:TIN PLATED ON CONTACT AREA.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 1KGF/PIN MAX
 - 3-2.REMOVAL FORCE: 3KGF/PIN MIN
 - 3-3.DURABILITY: 50 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1. RATED CURRENT : 10A
 - RATED VOLTAGE : 250V
 - 4-2.INSULATION RESISTANCE: 1000MΩ MIN
 - CONTACT RESISTANCE : 30mΩ MAX
 - 4-3.WITHSTANDING VOLTAGE:1500V AC
 - 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+90°C.
 - 6.PACKAGE SPEC: TRAY
 - 7.P/N:

A1 A2201 W 9-2 10 1 X X 0

SERIES NO: _____ COLOR: K-WHITE

CONNECTOR: _____ PLATING: C-BRIGHE TIN

ANGLE: 9-90°

ROW NO: 2-DOUBLE ROW

PIN Q' PY: 02~40 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1						
A1	PART NUMBER RENEWAL	23.10.07		0.0±0.35	X'REF±6°	APPROVED	Wang_jr	23.10.07	A2201W9-2101XX0	ENDE05		
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 90°卧插带扣 汽车连接器			
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	23.10.07			REV: A1	SHEET: 1/1