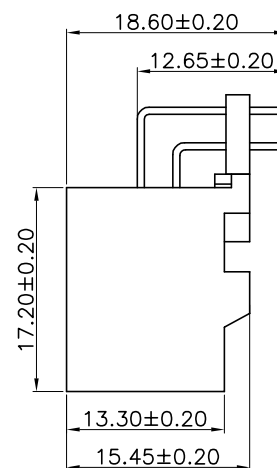
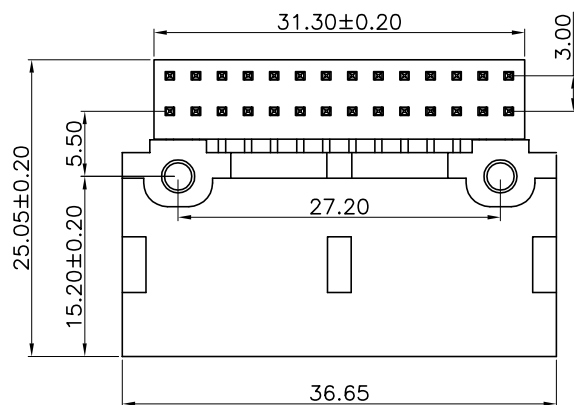
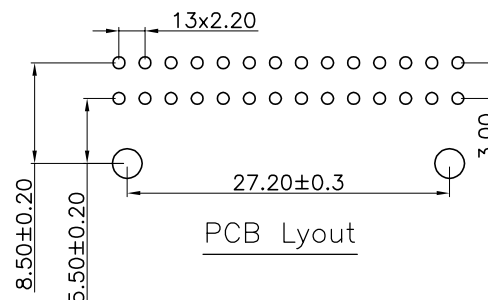
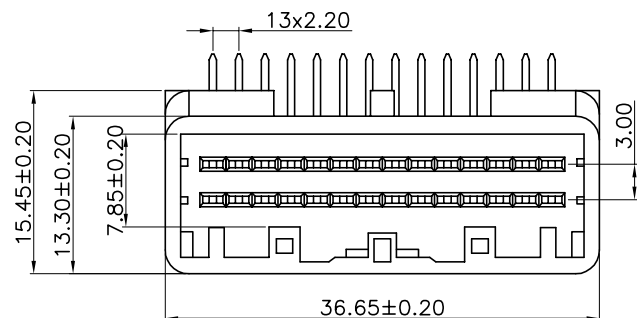


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

$$(\text{RoHS} + \text{HF})$$


NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING:PA66,UL94V-0

1-2.CONTACTS:BRASS H62

2.PLATING SPECIFICATION:

2-1.CONTACTS:TIN PLATED ON CONTACT AREA.

3.MECHANICAL PERFORMANCE:

3-1.INSERTION FORCE: 1KGF/PIN MAX

3-2.REMOVAL FORCE: 3KGF/PIN MIN

3-3.DURABILITY: 50 CYCLES.

4. ELECTRICAL PERFORMANCE:

4-1. RATED CURRENT : 10A

RATED CURRENT : 10A
RATED VOLTAGE : 250V

4-2.INSULATION RESISTANCE: 1000MΩ MIN

CONTACT RESISTANCE : 30mΩ MAX

4-3. WITHSTANDING VOLTAGE: 1500V AC

5.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+90^{\circ}\text{C}$.

6. PACKAGE SPEC: TRAY

7.P/N:

A2

A2201 W 9-2 28 1 X X 0

SERIES NO:-

CONNECTOR:

W-WAFER

ANGLE:

9-90°

ROW NO:

2-DOUBLE ROW

PIN Q' PY:

02~40

— COLOR:
K—WHITE

— PLATING:
C-BRIGHE TIN

—TERMIPOINT:
1—DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2201W9-2281XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.08				
A1	MODIFY THE SIZE	23.02.23		0.0±0.35	X*REF±6°							
A2	PART NUMBER RENEWAL	23.10.08	UNIT:mm	0.00±0.25	X*±3°	DESIGNER	Han_Gao	23.10.08	TITLE: PITCH 2.20mm 90° 卧插带扣 汽车连接器		REV: A2	SHEET: 1/1
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	23.10.08				