
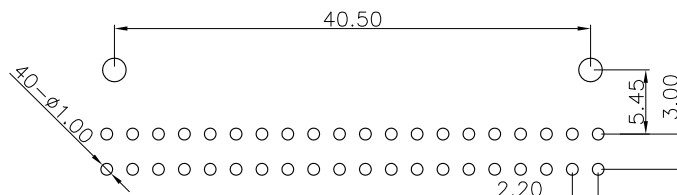
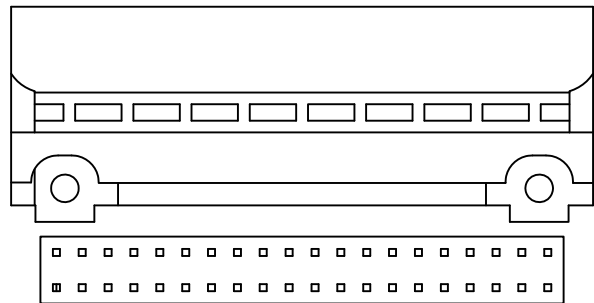


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




RoHS+HF

- NOTE:
- MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PA66,UL94V-0
 - 1-2.CONTACTS:BRASS H62
 - 1-3.CAP:PA66 COLOUR:WHITE
 - PLATING SPECIFICATION:
 - 2-1.CONTACTS:TIN PLATED ON CONTACT AREA.
 - MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 1KGF/PIN MAX
 - 3-2.REMOVAL FORCE: 3KGF/PIN MIN
 - 3-3.DURABILITY: 50 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - 4-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
 - 4-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
 - 4-3.WITHSTANDING VOLTAGE:1500V AC
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+90°C.
 - PACKAGE SPEC:TRAY
 - P/N:

 A2201 W 9-2 40 1 X X 0
 SERIES NO: _____ COLOR: K-WHITE
 CONNECTOR: _____ W-WAFER PLATING: C-BRIGHE TIN
 ANGLE: _____ 9-90°
 ROW NO: _____ 2-DOUBLE ROW
 PIN Q'PY: _____ 02~40 TERMIPOINT: 1-DIP



PCB Layout

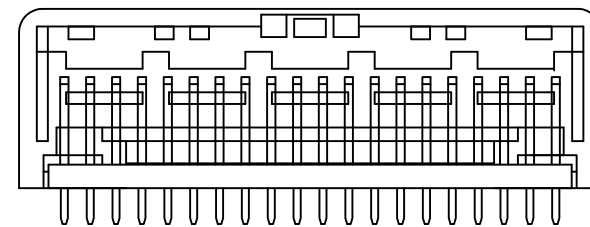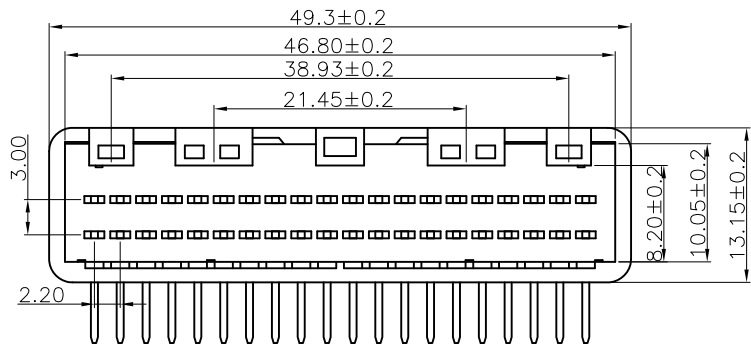

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: A2201W9-2401XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	Wang_jr	23.10.08				
A1	PART NUMBER RENEWAL	23.10.08	UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.10.08	TITLE: PITCH 2.20mm 90° 卧插带扣 汽车连接器			REV: A1
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang			23.10.08	