
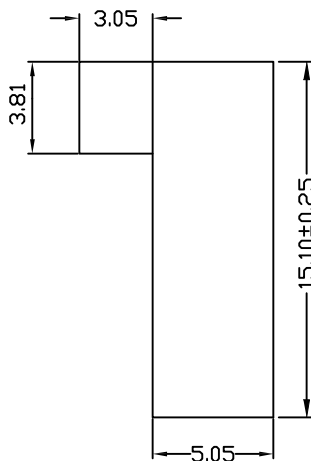
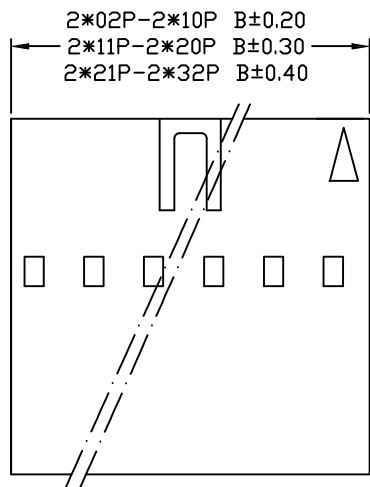


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

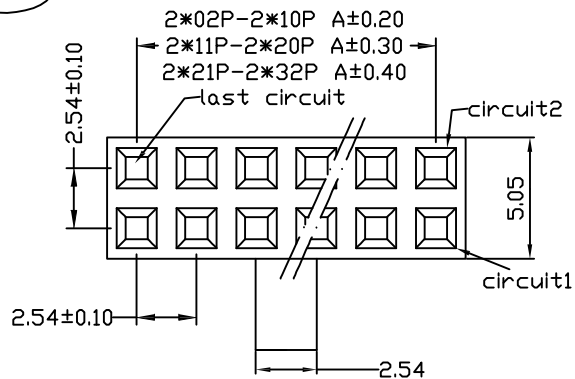

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 1.5KGF/pin min
 - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3.0A
 - RATED VOLTAGE : 250V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1500V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

A2547 H 1 M-2 XX X X
 SERIES NO: _____ WATER CODE
 CONNECTOR: _____ 0-N/A
 H-HOUSING
 1-TYPE CODE _____ COLOR:
 MALE FEMALE: _____ A-BLACK
 M-MALE K-WHITE
 F-FEMALE S-NATURE
 ROW NO: _____ PIN Q'PY:
 2-DOUBLE ROW 04~64

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
4	2.54	5.08	36	43.18	45.72
6	5.08	7.62	38	45.72	48.26
8	7.62	10.16	40	48.26	50.80
10	10.16	12.70	42	50.80	53.34
12	12.70	15.24	44	53.34	55.88
14	15.24	17.78	46	55.88	58.42
16	17.78	20.32	48	58.42	60.96
18	20.32	22.86	50	60.96	63.50
20	22.86	25.40	52	63.50	66.04
22	25.40	27.94	54	66.04	68.58
24	27.94	30.48	56	68.58	71.12
26	30.48	33.02	58	71.12	73.66
28	33.02	35.56	60	73.66	76.20
30	35.56	38.10	62	76.20	78.74
32	38.10	40.64	64	78.74	81.28
34	40.64	43.18			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2547H1M-2XXXX	DWG.NO: ENDE05	
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.08.01			
			0.0±0.35	X'REF±6'	DESIGNER	Han_Gao	21.08.01	TITLE:			
			UNIT:mm	0.00±0.25	X'±3'	DRAWN	Zijun_Huang	21.08.01			
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: A0	SHEET: 1/1	