

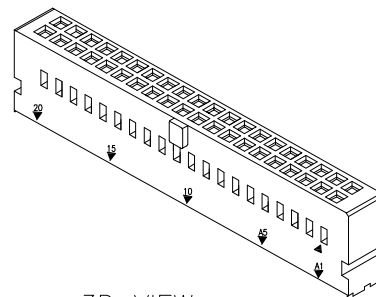
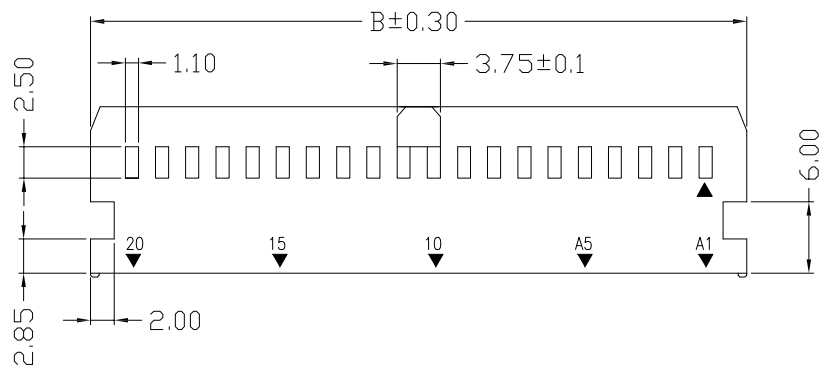


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS



3D VIEW

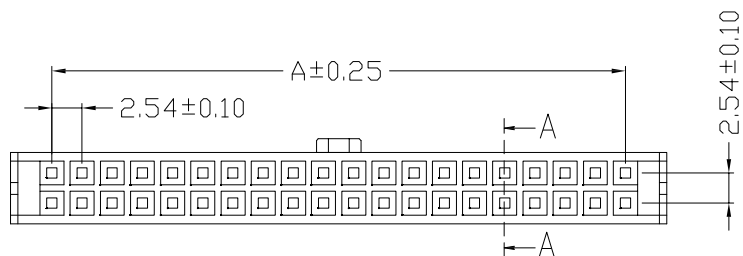

SECTION A-A

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
 - 2-1.CURRENT RATING: 3A
 - RATED VOLTAGE : 250V AC/DC
 - 2-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 2-3.INSULATION RESISTANCE: 1000MΩ Min
 - 2-4.DIELECTRIC WITHSTANDING : 1500V
- 3.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: PE BAG
- 5.P/N:

SERIES NO: A2547 H 2 M-2 XX X X WATER CODE 0-N/A
 CONNECTOR: H-HOUSING
 2-TYPE CODE
 MALE FEMALE: M-MALE F-FEMALE
 ROW NO: 2-DOUBLE ROW
 COLOR: A-BLACK K-WHITE S-NATURE
 PIN Q'PY: 04~64

Poles	Dimensions(mm)		Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B		A	B
2*02	2.54	9.48	2*13	30.48	37.42	2*24	58.42	65.36
2*03	5.08	12.02	2*14	33.02	39.96	2*25	60.96	67.90
2*04	7.62	14.56	2*15	35.56	42.50	2*26	63.50	70.44
2*05	10.16	17.10	2*16	38.10	45.04	2*27	66.04	72.98
2*06	12.70	19.64	2*17	40.64	47.58	2*28	68.58	75.52
2*07	15.24	22.18	2*18	43.18	50.12	2*29	71.12	78.06
2*08	17.78	24.72	2*19	45.72	52.66	2*30	73.66	80.60
2*09	20.32	27.26	2*20	48.26	55.20	2*31	76.20	83.14
2*10	22.86	29.80	2*21	50.80	57.74	2*32	78.74	85.68
2*11	25.40	32.34	2*22	53.34	60.28			
2*12	27.94	34.88	2*23	55.88	62.82			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	2022.3.2		LINEAR	ANGLES	1:1	Wang_jr	22.05.09	A2547H2M-2XXXX	ENDE05	
A0	NEW RELEASE	22.05.09		0.0±0.35	X'REF±6'	APPROVED	Han_Gao	22.05.09	TITLE: PITCH 2.54mm DOUBLE ROW HOUSING	REV: A0	SHEET: 1/1
				0.00±0.25	X'±3'	DESIGNER	LanXuan_Hou	22.05.09			
				0.000±0.10	X'X' ±2'	DRAWN					