

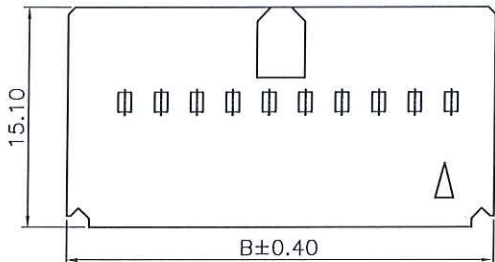
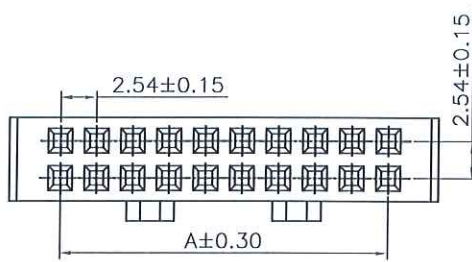


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements


RoHS

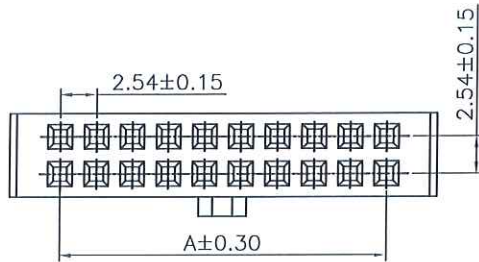


TYPE B (单凸无LOGO)

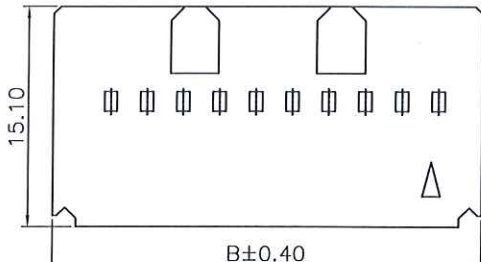

TYPE C (双凸无LOGO)

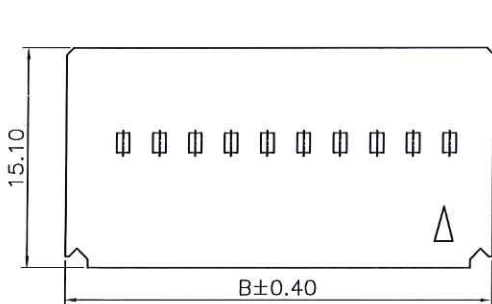

TYPE A (无凸无LOGO)



NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PBT,UL94V-0
 2.ELECTRICAL PERFORMANCE:
 2-1.CURRENT RATING: 3A AC/DC
 2-2.CONTACT RESISTANCE: 20 mΩ MAX
 2-3.INSULATION RESISTANCE: 1000MΩ Min
 2-4.DIELECTRIC WITHSTANDING : 1500V
 3.ENVIRONMENTAL PERFORMANCE:
 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
 4.PACKAGE SPEC: PE BAG
 5.P/N:

SERIES NO: A2547 H X M-2 XX X X
 CONNECTOR: H-HOUSING
 OPTION: 3-TYPE A, 4-TYPE B, 5-TYPE C
 MALE FEMALE: M-MALE
 WATER CODE: 0-N/A
 COLOR: A-BLACK, J-GREY (ROHS+HF)
 PIN Q'PY: 04~64
 ROW NO: 2-DOUBLE ROW

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
2*02	2.54	9.54	2*18	43.18	50.18
2*03	5.08	12.08	2*19	45.72	52.72
2*04	7.62	14.62	2*20	48.26	55.26
2*05	10.16	17.16	2*21	50.80	57.60
2*06	12.70	19.70	2*22	53.34	60.34
2*07	15.24	22.24	2*23	55.88	62.88
2*08	17.78	24.78	2*24	58.42	65.42
2*09	20.32	27.32	2*25	60.96	67.96
2*10	22.86	29.86	2*26	63.50	70.50
2*11	25.40	32.40	2*27	66.04	73.04
2*12	27.94	34.94	2*28	68.58	75.58
2*13	30.48	37.48	2*29	71.12	78.12
2*14	33.02	40.02	2*30	73.66	80.66
2*15	35.56	42.56	2*31	76.20	83.20
2*16	38.10	45.10	2*32	78.74	85.74
2*17	40.64	47.64			



REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2547HXM-2XXXX	DWG.NO: ENDE05	REV: A1	SHEET: 1/1
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED						
A1	NEW COLOR SPECIFICATION	25.03.03	0.00±0.25	X'±3'	DESIGNER				TITLE: Pitch 2.54mm Housing			
			0.00±0.10	X'X' ±2'	DRAWN							

