



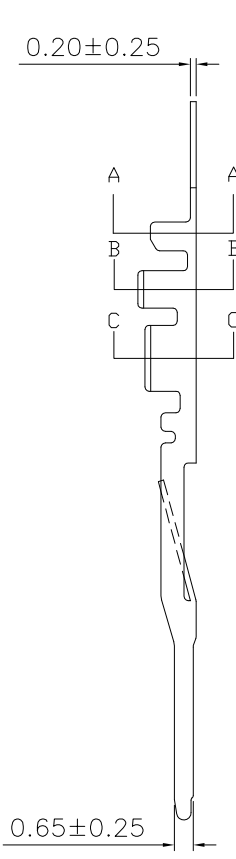


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

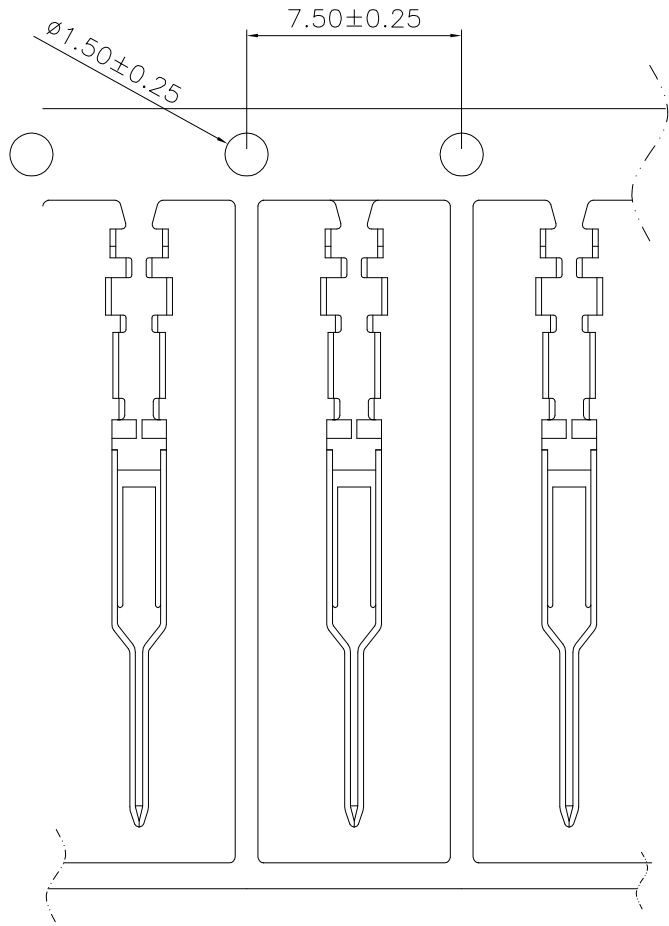

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.CONTACTS: PHOSPHOR BRONZE
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 2.5KGF/pin min
 3-2.DURABILITY: 30 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 250V AC/DC
 4-2.CONTACT RESISTANCE: 10 mΩ MAX
 4-3.INSULATION RESISTANCE: 100MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 1500V
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 6.PACKAGE SPEC: REEL
 7.P/N:
 A2549 T M X-X
 SERIES NO: _____ PLATING:
 1-G/F
 CONNECTOR: _____ A-ALL AU G/F
 T-TERMINAL C-BRIGHE TIN
 D-MATTE TIN
 MALE FEMALE: _____ METAL:
 F-FEMALE P-PHOSPHOR BRONZE
 M-MALE B-BRASS

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2549TMP-D	AWG#22-#26	1.55mm(max)	Phosphor Bronze	Fog Tin-plated	10,000pcs

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	Wang_jr	21.11.17	A2549TMX-X	ENDE05	
			0.0±0.35	X'REF±6'	APPROVED	Han_Gao	21.11.17	TITLE:			
			0.00±0.25	X'±3'	DESIGNER	Zijun_Huang	21.11.17	Pitch 2.54mm male端子 AWG#22~#26			
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN				REV: A0	SHEET: 1/1