The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

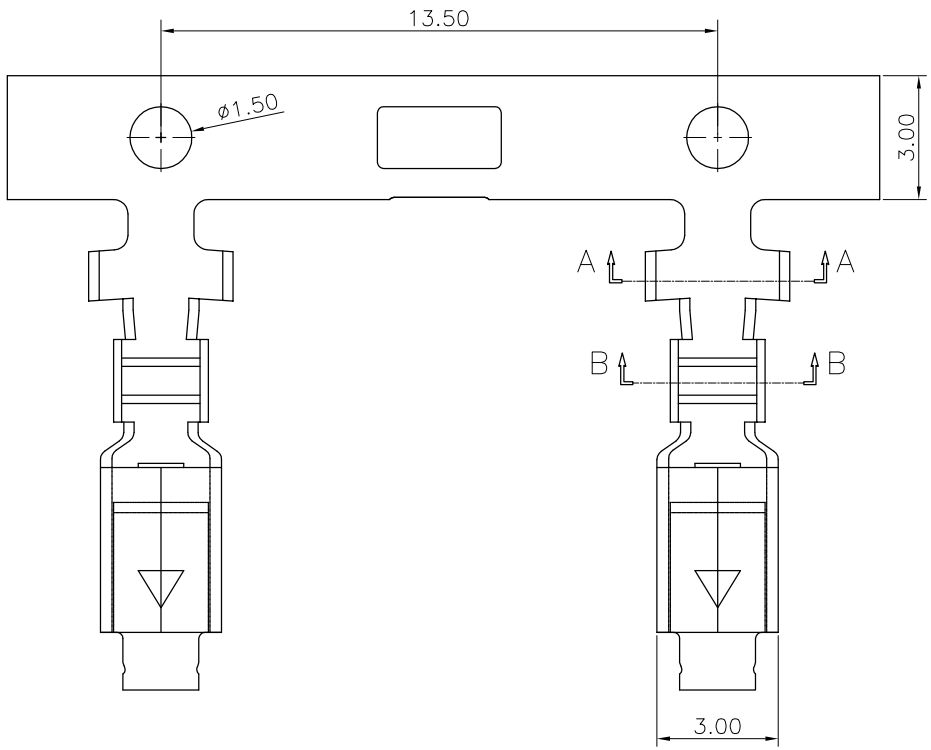

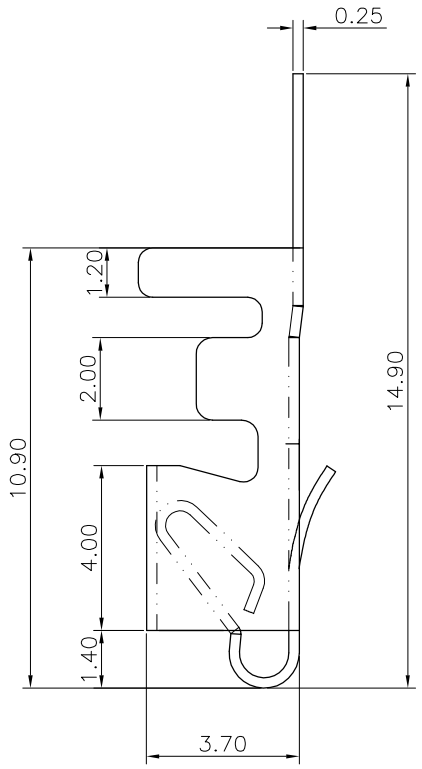

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE/BRASS
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 7A AC/DC
3-2.CONTACT RESISTANCE: 10 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: REEL
6.P/N:

A3962 T 3 F X-X

SERIES NO:
CONNECTOR:
T-TERMINAL
TYPE CODE
MALE FEMALE:
F-FEMALE
M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS



SECTION:A-A



SECTION:B-B



Wire Range	Qty/reel
AWG16#-24#	3500pcs

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.11.17

UNIT: mm
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	21.11.17
DESIGNER	Han_Gao	21.11.17
DRAWN	Zijun_Huang	21.11.17

PART.NO: A3962T3FX-X

DWG.NO: ENDE05

TITLE: Pitch 3.96mm 180°VH 端子

万连科技
WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1