

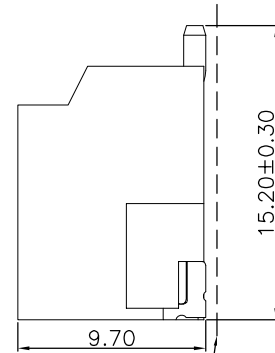


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



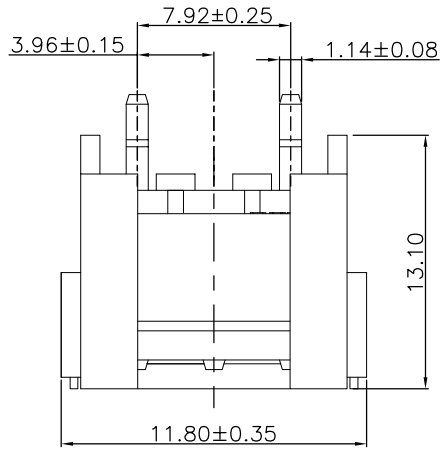


3D VIEWS

D	02P~08P	0.10	MAX
	09P~16P	0.12	MAX

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: LCP,UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: TIN PLATED
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 7A
  - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 1500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

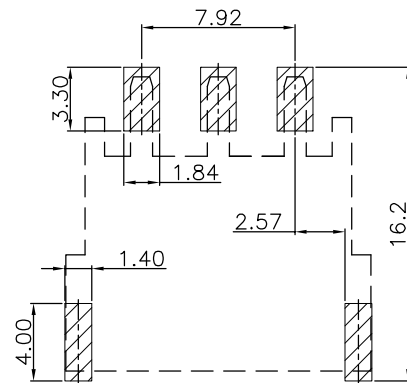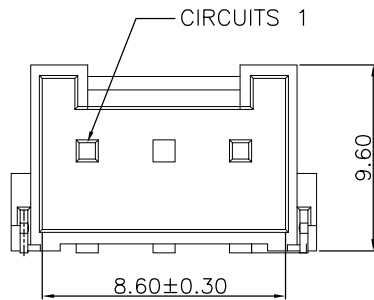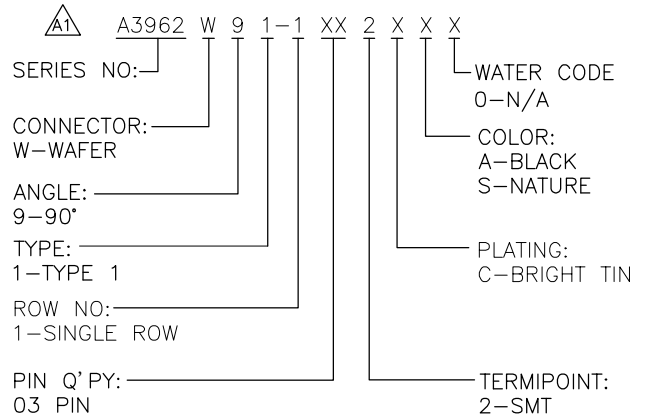

RECOMMENDED PCB LAYOUT  
(GENERAL TOLERANCE:±0.05)






REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.14	A3962W91-1XX2XXX	ENDE05	
A1	PART NUMBER RENEWAL	23.09.14	UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	23.09.14	TITLE: Pitch 3.96mm 90° 单排卧贴 3P Wafer 空第2P		REV: A1
				SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LX_HOU			

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements



NOTE(注):

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ . (10片孔距累积公差  $\pm 0.2\text{mm}$ .)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS. (载带材料: 透明抗静电 PS.)
5. THICKNESS:  $0.50 \pm 0.05\text{mm}$ . (载带厚度:  $0.50 \pm 0.05\text{mm}$ .)
6. PACKING LENGTH PER REEL: 7.68 METERS. (每卷包装长度: 7.68米.)
7. COMPONENT LOAD PER REEL: 300 PCS. (每卷包装数量: 300只.)
8. Carton packing to no more than the line, using the free slots filled with plastic foam and nylon. (纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及尼龙填充.)
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

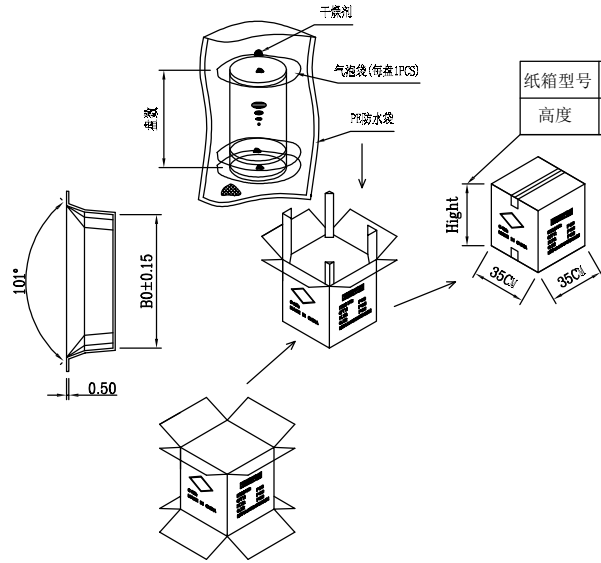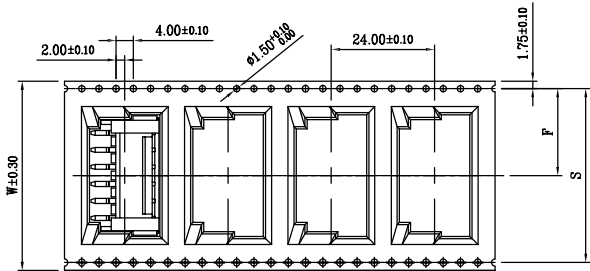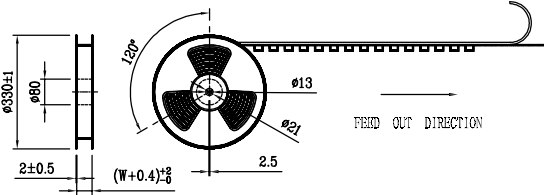

纸箱型号	小型	中型	标准型
高度	7.5	15	32

Circuits	W	PCS/REEL	REEL/CARTON	SUM (PCS)
02	24	300	10	3000
03	32	300	8	2400
04	44	300	6	1800
05		300	6	1800
06	56	300	6	1800
07		300	4	1200
08		300	4	1200
09		300	4	1200
10	72	300	3	900
11		300	3	900
12		300	3	900
13		300	3	900
14	88	300	3	900
15		300	3	900
16		300	3	900

Circuits	B0	W	F	S
02	12.38	24	11.50	/
03	16.34	32	14.20	28.40
04	20.30	44	20.20	40.40
05	24.26			
06	28.22	56	26.20	52.40
07	32.18			
08	36.14			
09	40.1			
10	44.06	72	34.20	68.40
11	48.02			
12	51.98			
13	55.94	88	42.20	84.40
14	59.90			
15	63.86			
16	67.82			

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	23.09.14	A3962W91-1XX2XXX	ENDE05	
A1	PART NUMBER RENEWAL	23.09.14	SIZE: A4	0.00±0.25	X'±3'	DESIGNER	Gao_Han	23.09.14	TITLE: Pitch 3.96mm 90° 单排卧贴 3P Wafer 空第2P	REV: A1	SHEET: 2/2
				0.00±0.10	X'X' ±2'	DRAWN	LX_HOU	23.09.14			

