
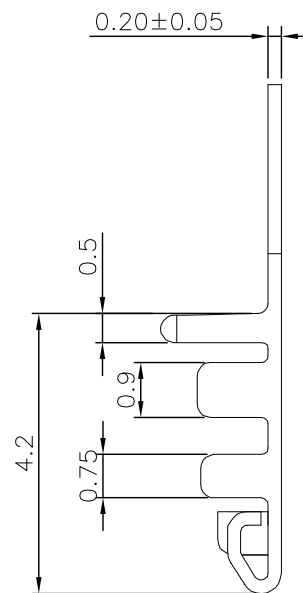


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

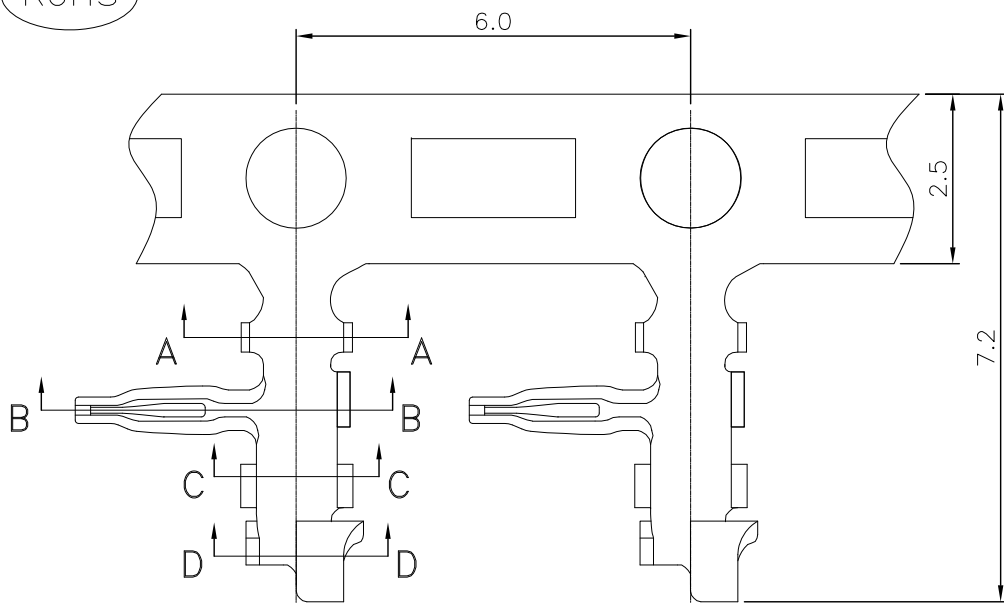


NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.CONTACTS: PHOSPHOR BRONZE
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 0.7KGF/Pin Min
 3-2.DURABILITY: 5 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 0.7A AC/DC
 RATED VOLTAGE : 50V AC/DC
 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 4-3.INSULATION RESISTANCE: 500MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 500V
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -20°C~+85°C.
 6.PACKAGE SPEC: REEL
 7.P/N: B1501 T F 9 X-X

SERIES NO: _____
 CONNECTOR: _____
 T-TERMINAL _____
 MALE FEMALE: _____
 F-FEMALE _____


PLATING:
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE TIN

METAL:
 P-PHOSPHOR BRONZE
 B-BRASS


ANGLE:
 9-90°




SECTION A-A




SECTION B-B



SECTION C-C



SECTION D-D

REV.	REVISION RECORD	DATE	☉	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	22.09.08		LINEAR	ANGLES	APPROVED	Wang_jr	22.09.08	B1501TF9X-X	ENDE05	
			UNIT:mm	0.00±0.25	X°REF±6°	DESIGNER	Han_Gao	22.09.08	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.09.08	Pitch1.5mm 90°SZN卧插式基板端子AWG#24-#28		