

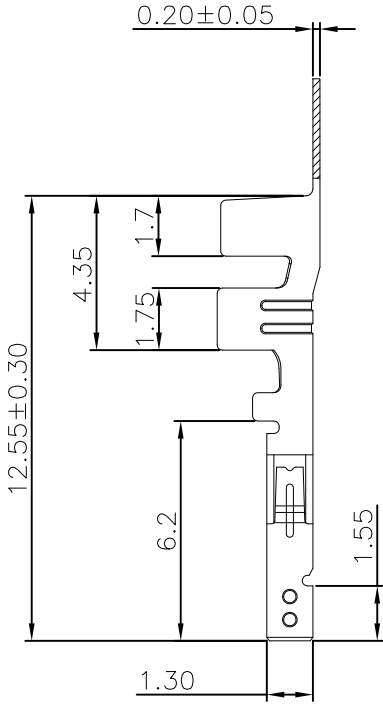
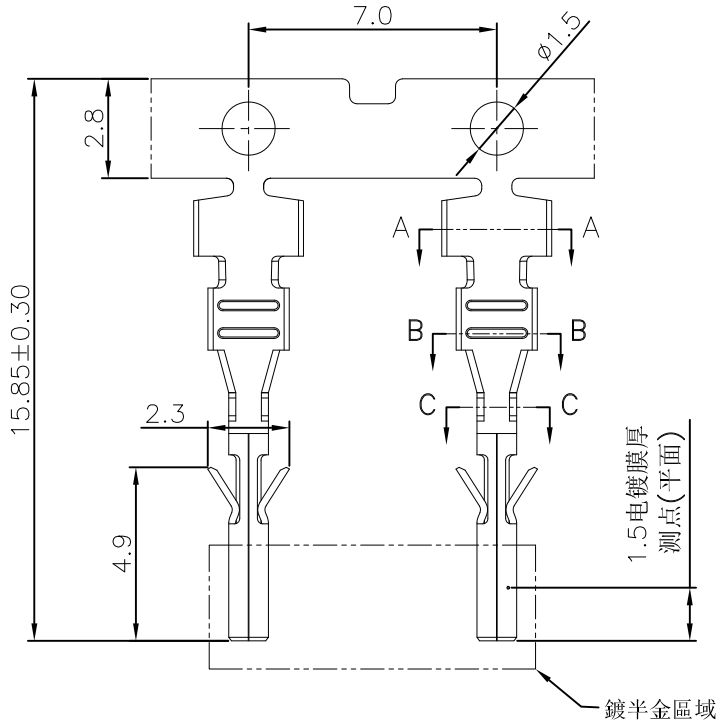


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS




NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: High conductivity copper
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.4KGF/pin min
3-2.DURABILITY: 25 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 9.2A AC/DC
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKAGE SPEC : REEL
7.P/N:
C3030 T 1 F X-X
SERIES NO:
CONNECTOR:
T-TERMINAL
1-TYPE CODE
MALE FEMALE:
F-FEMALE
M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS



Section A-A



Section B-B



Section C-C

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030T1FX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE: Pitch 3.0 镀锡高导铜先冲后镀母端子 AWG#16-#18		
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.05.09			
			SIZE: A4	0.000±0.10	X°X' ±2°				REV: A0	SHEET: 1/1	