


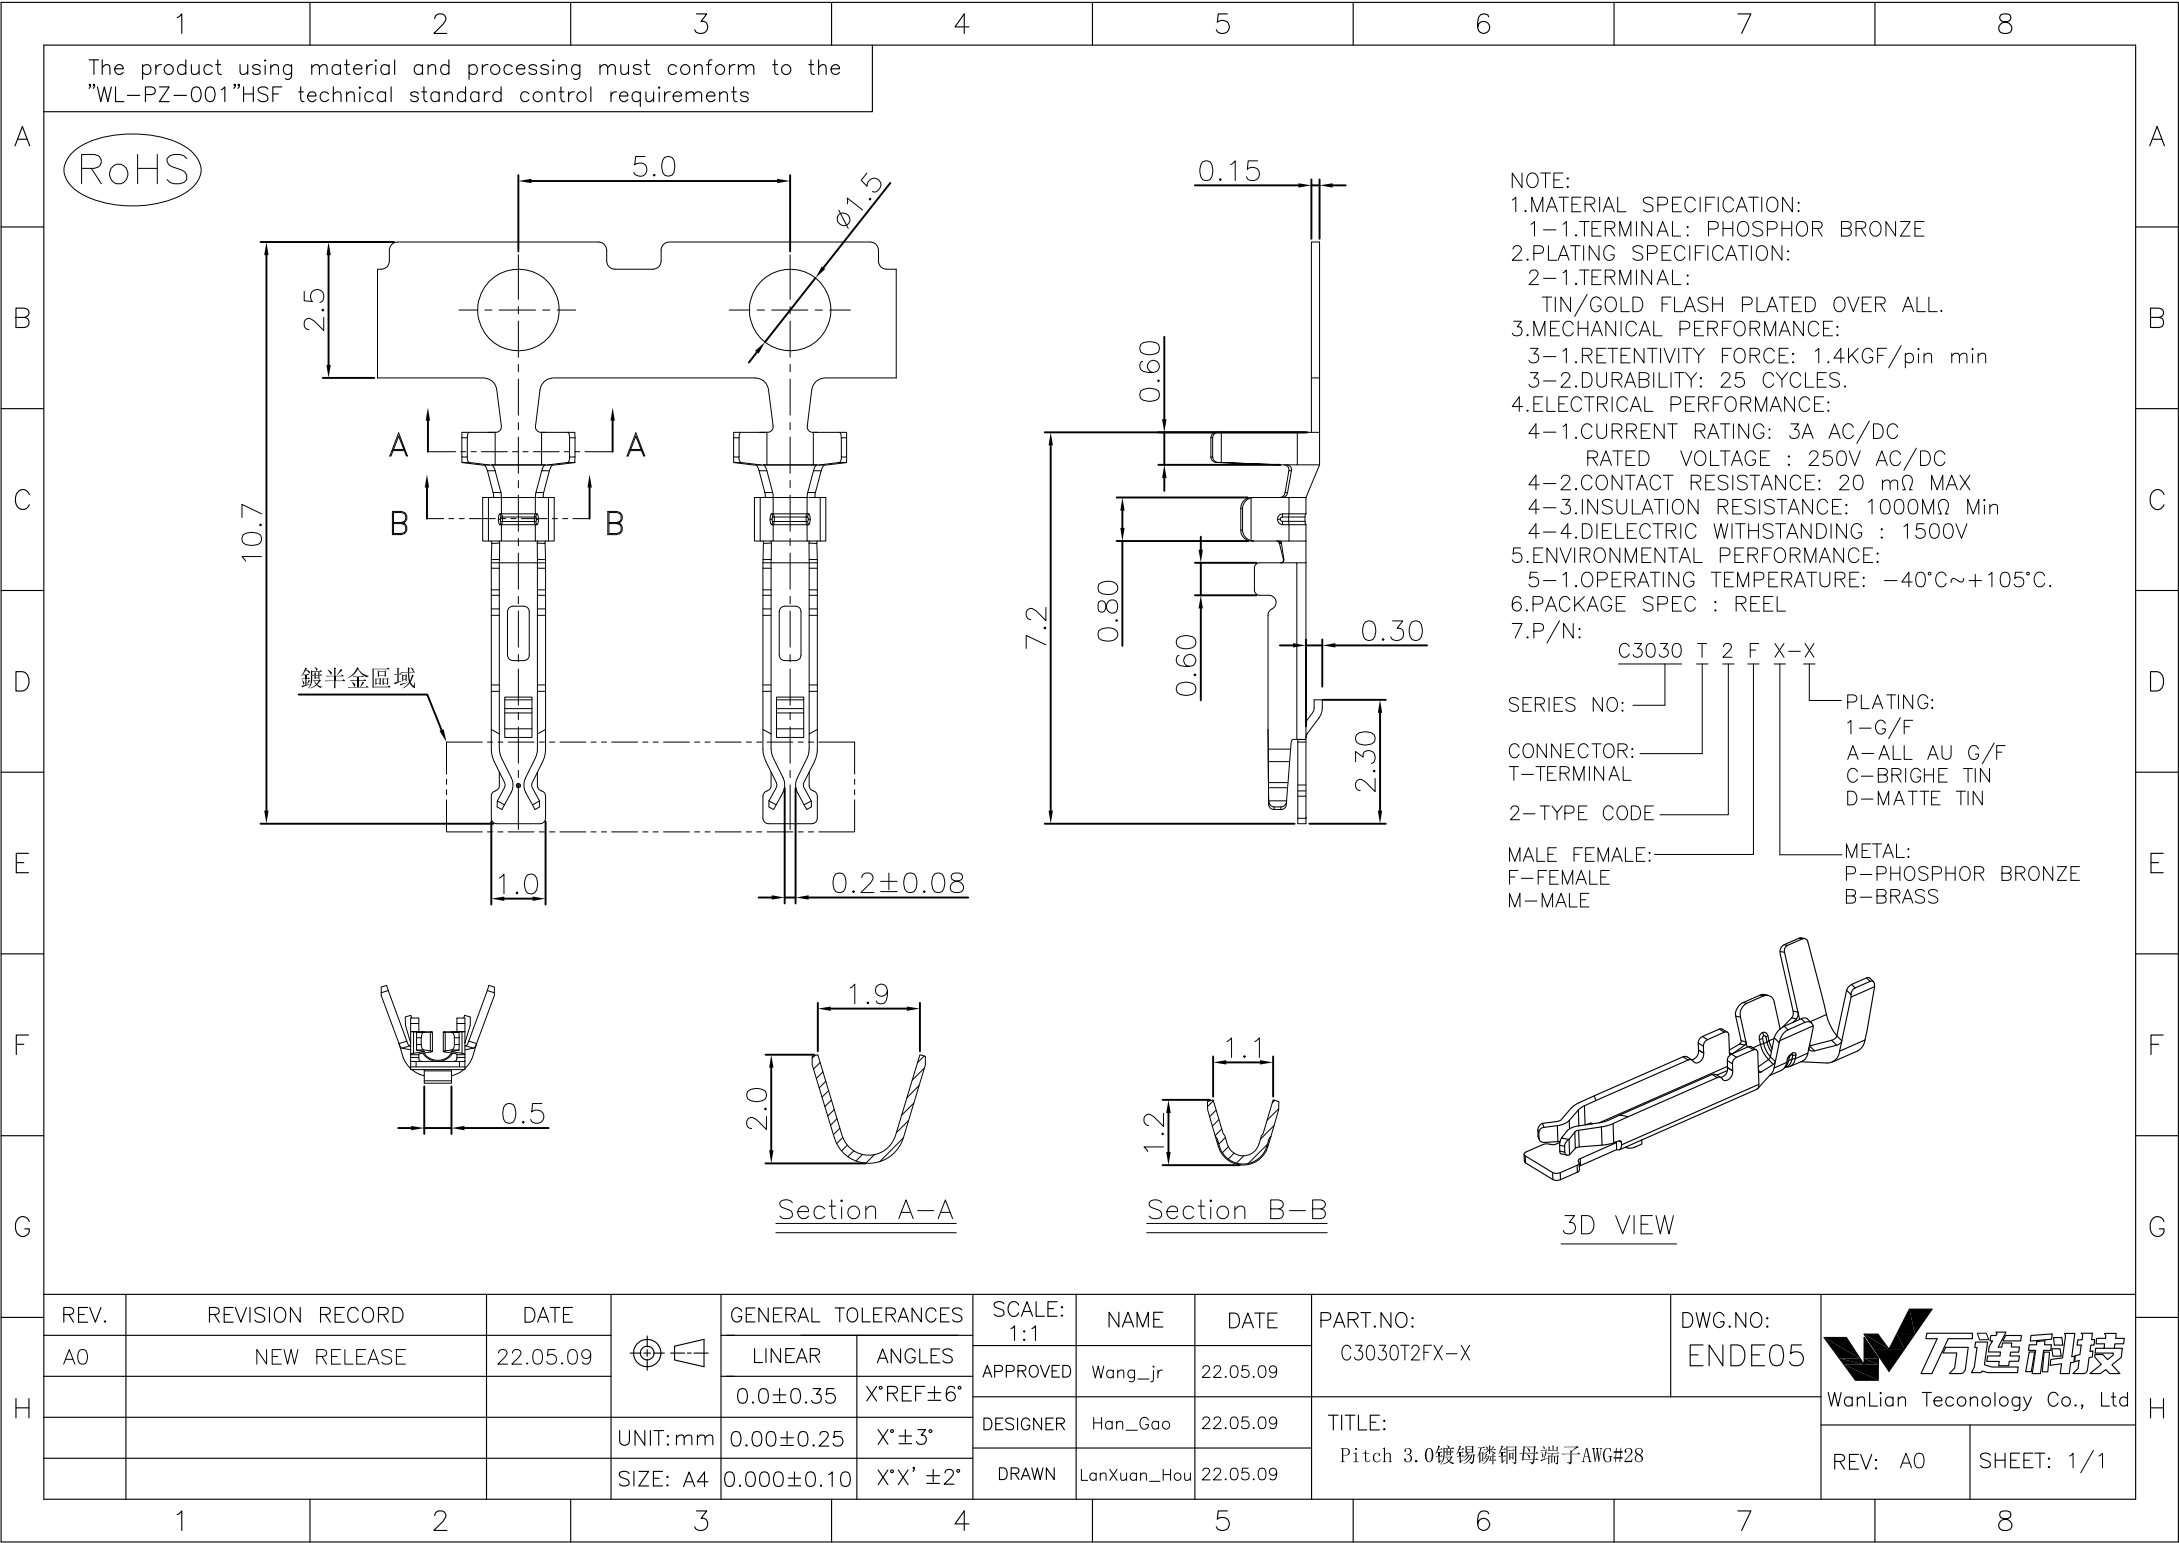

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.4KGF/pin min
3-2.DURABILITY: 25 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKAGE SPEC : REEL
7.P/N:
C3030 T 2 F X-X
SERIES NO: T 2 F X-X
CONNECTOR: T 2 F X-X
T-TERMINAL
2-TYPE CODE
MALE FEMALE: T 2 F X-X
F-FEMALE
M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	1:1			C3030T2FX-X	ENDE05	
			UNIT:mm	0.0±0.35	X°REF±6°	APPROVED	Wang_jr	22.05.09	TITLE: Pitch 3.0 镀锡磷铜母端子 AWG#28		WanLian Teconology Co., Ltd
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.05.09			
				0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.05.09			
SIZE: A4											

REV: A0 SHEET: 1/1