


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RoHS+HF

NOTE:


- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:LCP 94V-0 BLACK
 - 1-2.CONTACTS:PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: G/F UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.MAINTAIN FORCE: 0.2kgf/pin min
 - 3-2.DURABILITY: 25 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING:0.2A
 - 4-2.VOLTAGE RATING:30V MAX
 - 4-3.CONTACT RESISTANCE: 30m Ohm MAX.
 - 4-4.INSULATION RESISTANCE: 100MΩ MIN
 - 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 200V AC MIN.
- 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- 6.PACKAGE SPEC:PE BAG
- 7.P/N ORDER:



3D VIEW

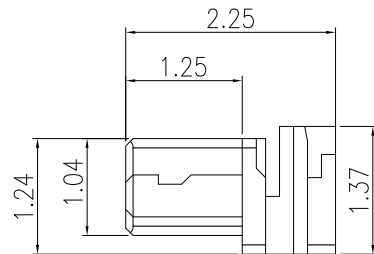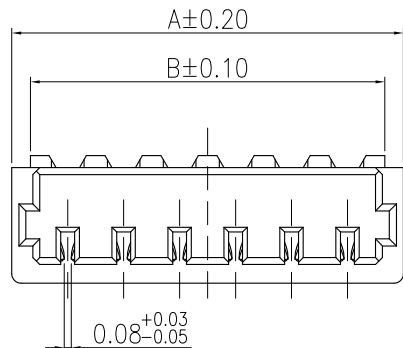

APPLICABLE WIRE:
AWG #34;AWG #36

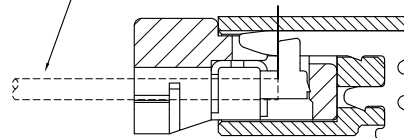

MATED CONDITON

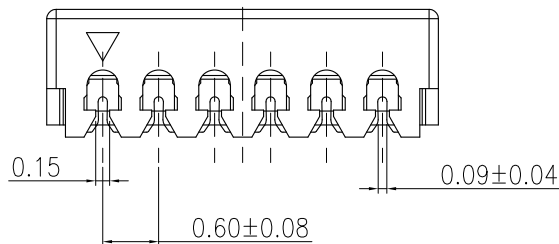
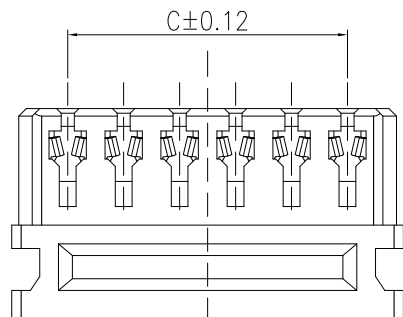


TABLE:

NO	DIMENSION MM			Q'ty
	A	B	C	
2	1.80	1.40	0.60	1000PCS
3	2.40	2.00	1.20	3000PCS
4	3.00	2.60	1.80	1000PCS
5	3.60	3.20	2.40	1000PCS
6	4.20	3.80	3.00	1000PCS
7	4.80	4.40	3.60	1000PCS
8	5.40	5.00	4.20	1000PCS
9	6.00	5.60	4.80	3000PCS
10	6.60	6.20	5.40	1000PCS
12	7.80	7.40	6.60	1000PCS
14	9.00	8.60	7.80	1000PCS
16	10.20	9.80	9.00	1000PCS

SERIES NO: D0601 H M-1 XX X 0

COLOR:
A-BLACK
K-WHITE
S-NATURE

CONNECTOR: H-HOUSING
PIN Q'PY: 02~16

MALE FEMALE: M-MALE
ROW NO: 1-SINGLE ROW

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A0	SHEET: 1/1
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1							
			0.00±0.25	X'±3'	APPROVED	Wang_jr	21.01.13		D0601HM-1XXX0	ENDE05			
			0.00±0.10	X'X' ±2'	DESIGNER	Wang_jr	21.01.13				0.60 IDC HOUSING+TERMINAL		
			SIZE: A4		DRAWN	Wang_jr	21.01.13						



WanLian Teconology Co., Ltd