
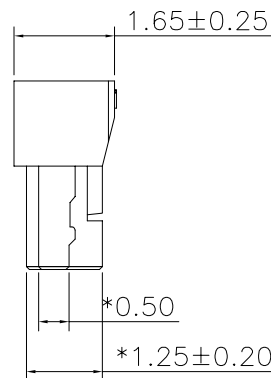
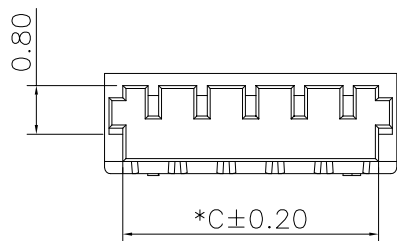
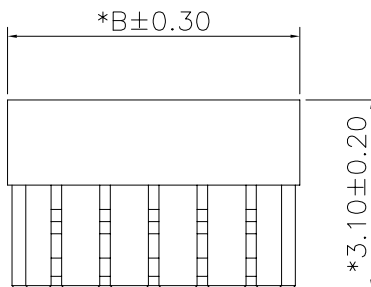
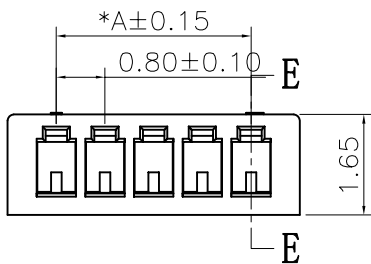
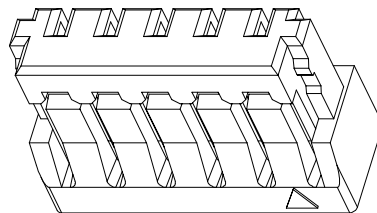


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF



NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA46,UL94V-0
- 2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 0.25kgf/PIN MIN
2-2.DURABILITY: 30 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 0.5A
RATED VOLTAGE : 30V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 100MΩ Min
3-4.DIELECTRIC WITHSTANDING : 200V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

D0801 H 3 M-1 XX X 0

SERIES NO: | H | 3 | M-1 | XX | X | 0

CONNECTOR: | H-HOUSING

TYPE CODE: | H | 3 | M-1 | XX | X | 0

MALE FEMALE: | M-MALE

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
02~20

ROW NO:
1-SINGLE ROW

PART NO.	Dimensions			PART NO.	Dimensions		
	A	B	C		A	B	C
02P	0.80	2.40	1.80	12P	8.80	10.40	9.80
03P	1.60	3.20	2.60	13P	9.60	11.20	10.60
04P	2.40	4.00	3.40	14P	10.40	12.00	11.40
05P	3.20	4.80	4.20	15P	11.20	12.80	12.20
06P	4.00	5.60	5.00	16P	12.00	13.60	13.00
07P	4.80	6.40	5.80	17P	12.80	14.40	13.80
08P	5.60	7.20	6.60	18P	13.60	15.20	14.60
09P	6.40	8.00	7.40	19P	14.40	16.00	15.40
10P	7.20	8.80	8.20	20P	15.20	16.80	16.20
11P	8.00	9.60	9.00				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.10.12	LINEAR	1:1	APPROVED Wang_jr	21.10.12	D0801H3M-1XXX0	ENDE05
			0.0±0.35		DESIGNER Han_Gao	21.10.12	TITLE:	
			0.00±0.25		DRAWN Zijun_Huang	21.10.12	Pitch 0.80mm SUH单排无耳 无LOGO Housing	REV: A0
			0.000±0.10					SHEET: 1/1



WanLian Teconology Co., Ltd