

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING:LCP 94V-0
- 2.MECHANICAL PERFORMANCE:
2-1.RETENTION FORCE: 1.0kgf/PIN MIN
2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 1A
RATED VOLTAGE : 30V AC
4-2.INSULATION RESISTANCE: 100MΩ MIN
4-3.CONTACT RESISTANCE :30mΩ MAX
4-4.WITHSTANDING VOLTAGE: 200V AC
- 4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
- 5.P/N:

D0801 H M-1 XX X 0

SERIES NO:

COLOR:





CONNECTOR:
H-HOUSING

A-BLACK
K-WHITE
S-NATURE


MALE FEMALE:
M-MALE

PIN Q'PY:
02~16


ROW NO:
1-SINGLE ROW

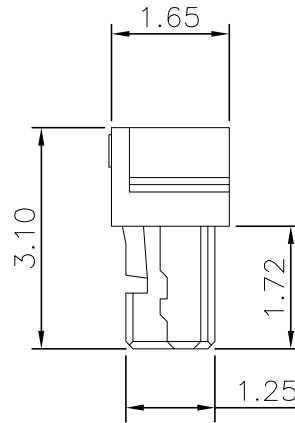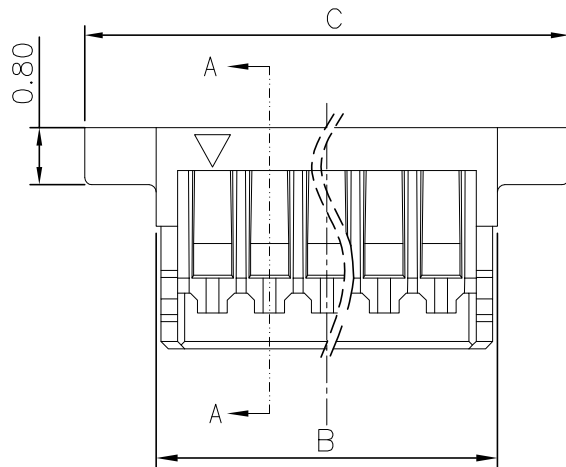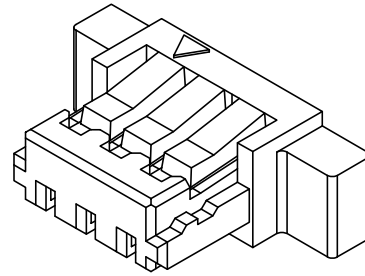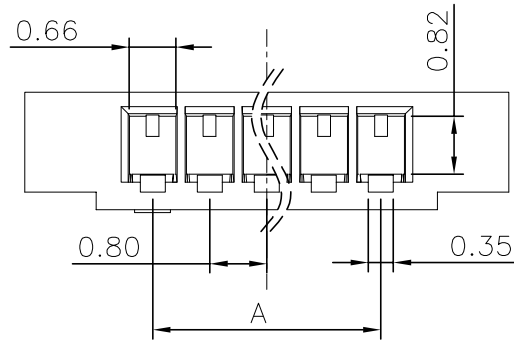

SECTION: A-A

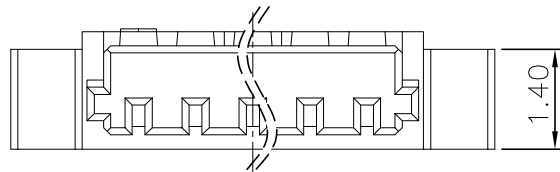

Circuit	Dimensions (mm)			Circuit	Dimensions (mm)		
	A	B	C		A	B	C
02	0.80	2.40	4.40	12	8.80	10.4	12.40
03	1.60	3.20	5.20	13	9.60	11.20	13.20
04	2.40	4.00	6.00	14	10.40	12.0	14.00
05	3.20	4.80	6.80	15	11.20	12.80	14.80
06	4.00	5.60	7.60	16	12.00	13.60	15.60
07	4.80	6.40	8.40	17	12.80	14.40	16.40
08	5.60	7.20	9.20	18	13.60	15.20	17.20
09	6.40	8.00	10.00	19	14.40	16.0	18.00
10	7.20	8.80	10.80	20	15.20	16.80	18.80
11	8.00	9.60	11.60				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A1	SHEET: 1/1
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1							
A1	Increase the view	22.06.27	0.00±0.25	X'±3'	APPROVED	Wang_jr	22.06.27	D0801HM-1XXX0	ENDE05	 WanLian Technology Co., Ltd			
			0.00±0.10	X'X' ±2'	DESIGNER	Han_Gao	22.06.27						TITLE: PITCH 0.80mm SUH SINGLE ROW HAVE EARLOCK HOUSING
			SIZE: A4		DRAWN	LX_HOU	22.06.27						