
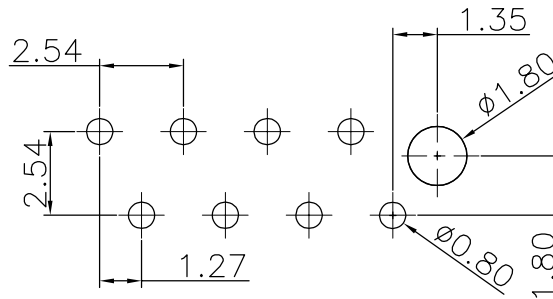


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

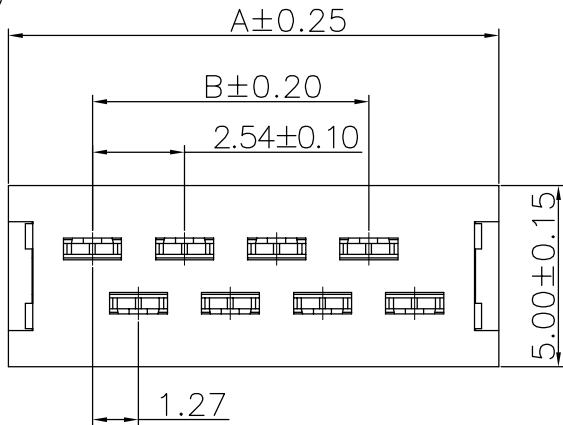

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: UL94V-0
    - CONTACTS: BRASS
  - PLATING SPECIFICATION:
    - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:
    - RETENTIVITY FORCE: 0.5KGF/pin min
    - DURABILITY: 30 CYCLES.
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 1A AC/DC  
RATED VOLTAGE : 250V AC/DC
    - CONTACT RESISTANCE: 20 mΩ MAX
    - INSULATION RESISTANCE: 1000MΩ Min
    - DIELECTRIC WITHSTANDING : 1000V
  - Wire Range: AWG#28
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC: TUBE
  - P/N:

D12751 M 0-2 XX 6 X X X

SERIES NO: \_\_\_\_\_

MALE FEMALE: \_\_\_\_\_

M-MALE \_\_\_\_\_

ANGLE: \_\_\_\_\_

9-90° \_\_\_\_\_

0-180° \_\_\_\_\_

ROW NO: \_\_\_\_\_

2-DOUBLE ROW \_\_\_\_\_

PIN Q'PY: \_\_\_\_\_

04~26 \_\_\_\_\_

HOUSING: \_\_\_\_\_

1-PBT 2-PA6T \_\_\_\_\_

3-PA9T 4-LCP \_\_\_\_\_

COLOR: \_\_\_\_\_

A-BLACK \_\_\_\_\_

K-WHITE \_\_\_\_\_

C-RED \_\_\_\_\_

PLATING: \_\_\_\_\_



A-ALL AU G/F \_\_\_\_\_

C-BRIGHE TIN \_\_\_\_\_

D-MATTE Tin \_\_\_\_\_


TERMIPOINT: \_\_\_\_\_

6-PUNCTURED TYPE \_\_\_\_\_

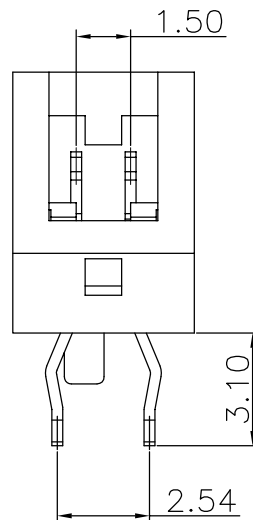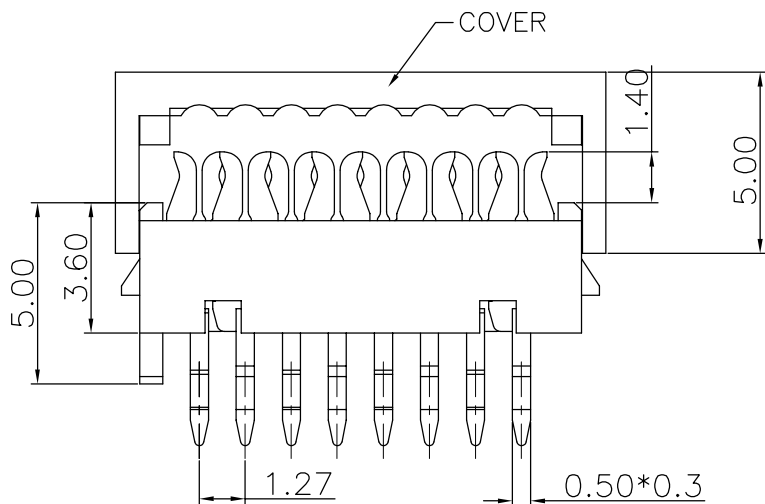

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*02P	8.45	2.54	2*08P	23.69	17.78
2*03P	10.99	5.08	2*09P	26.23	20.32
2*04P	13.53	7.62	2*10P	28.77	22.86
2*05P	16.07	10.16	2*11P	31.31	25.40
2*06P	18.61	12.70	2*12P	33.85	27.94
2*07P	21.15	15.24	2*13P	36.39	30.48

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	22.07.07		LINEAR	ANGLES	1:1	APPROVED	DESIGNER			
			0.0±0.35	X'REF±6'		Wang_jr	Han_Gao	Pitch 1.27mm 180° 双排 DIP IDC 公座			
			0.00±0.25	X'±3'			LanXuan_Hou				
			0.000±0.10	X'X' ±2'							

REV: A0 SHEET: 1/1