
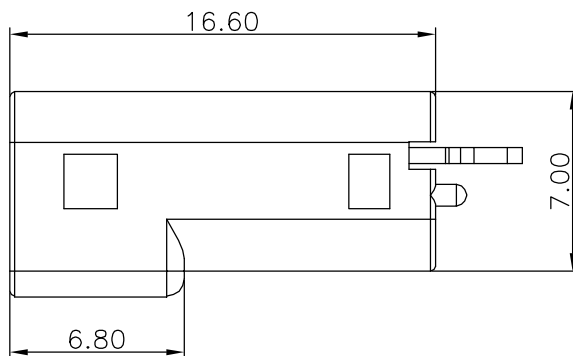
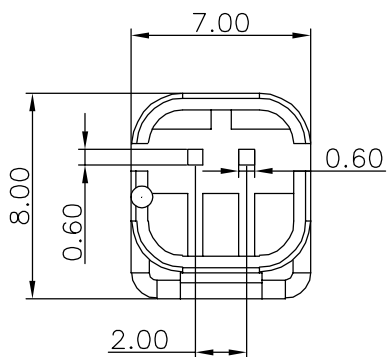



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

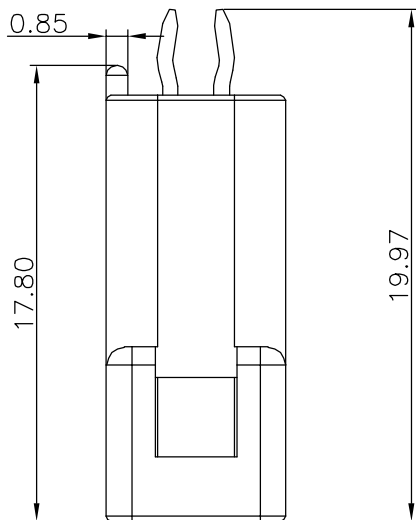

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT+15%G/F,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
 - 2-1.CURRENT RATING: 3A
 - RATED VOLTAGE : 100V
 - 2-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 2-3.INSULATION RESISTANCE: 1000MΩ Min
 - 2-4.DIELECTRIC WITHSTANDING : 1000V AC
- 3.ENVIRONMENTAL PERFORMANCE:
 - 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: PE BAG
- 5.P/N:

C2004 W 0-1 XX 1 X X 0

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
0-180°


ROW NO:
1-SINGLE ROW



COLOR:
K-WHITE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN

TERMIPOINT:
1-DIP



PIN Q'PY:
02 PIN

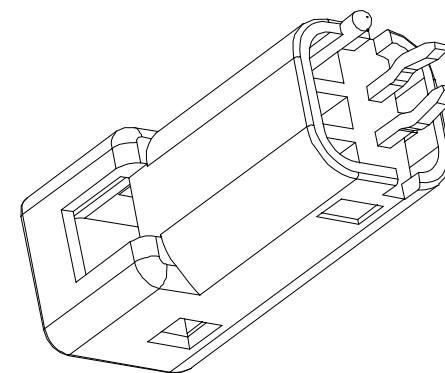

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	C2004W0-1XX1XX0	ENDE05	
			UNIT: mm	0.00±0.25	X'±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch2.00mm JWPF 180°单排带柱防水IP67 打外K Wafer		REV: A0 SHEET: 1/3
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.03.19			




The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

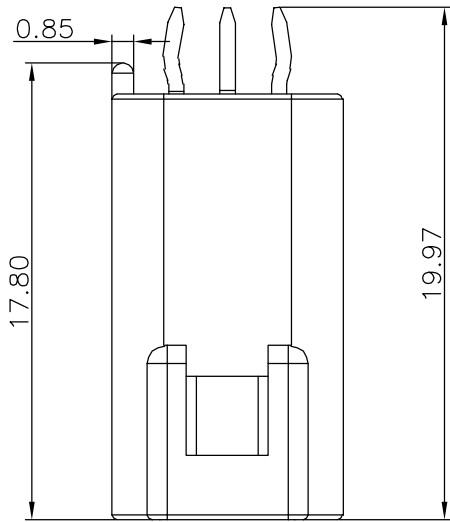

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT+15%G/F,UL94V-0
 - 2.ELECTRICAL PERFORMANCE:
 - 2-1.CURRENT RATING: 3A
 - RATED VOLTAGE : 100V
 - 2-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 2-3.INSULATION RESISTANCE: 1000MΩ Min
 - 2-4.DIELECTRIC WITHSTANDING : 1000V AC
 - 3.ENVIRONMENTAL PERFORMANCE:
 - 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 4.PACKAGE SPEC: PE BAG
 - 5.P/N: C2004 W 0-1 XX 1 X X 0
- SERIES NO: _____ COLOR: K-WHITE
- CONNECTOR: _____ PLATING: A-ALL AU G/F C-BRIGHT TIN
- ANGLE: _____ TERMIPOINT: 0-180° 1-DIP
- ROW NO: _____ PIN Q'PY: 1-SINGLE ROW 03 PIN

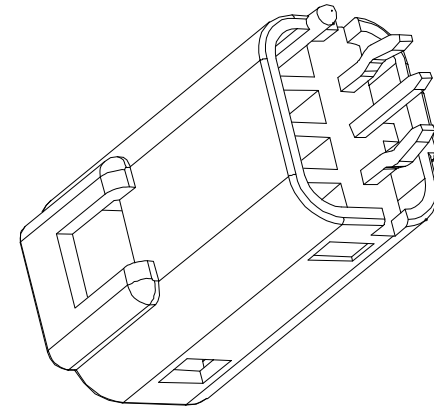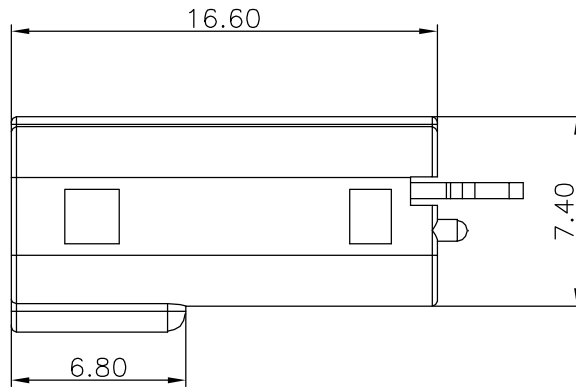
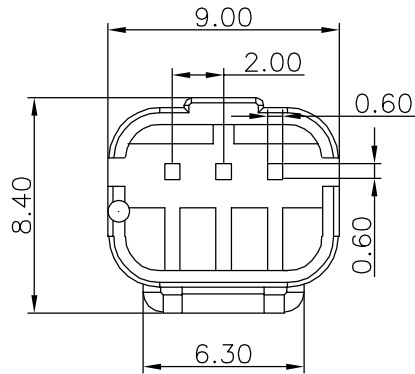


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.03.19		LINEAR	1:1	Wang_jr	22.03.19	C2004W0-1XX1XX0	ENDE05	
				ANGLES	APPROVED					
				0.0±0.35	X'REF±6°	XueZe_Ma	22.03.19	TITLE:	Pitch2.00mm JWPf 180°单排带柱防水IP67 打外K Wafer	
				0.0±0.25	X'±3°					CHECK
			UNIT: mm	0.00±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.03.19	REV: A0	SHEET: 2/3



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS


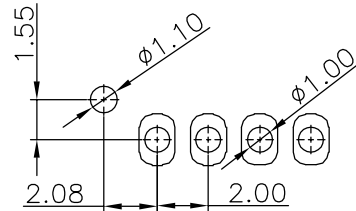
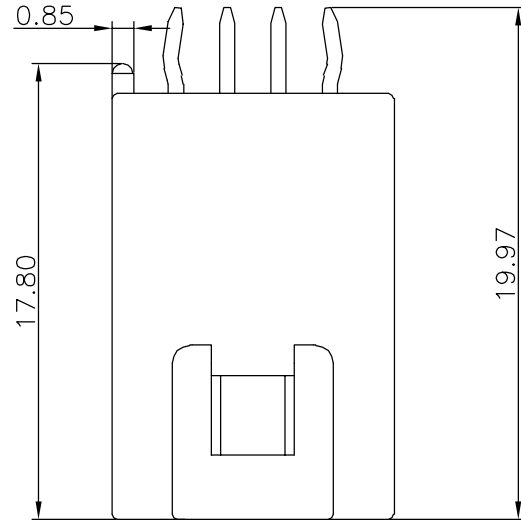


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT+15%G/F,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
 - 2-1.CURRENT RATING: 3A
 - RATED VOLTAGE : 100V
 - 2-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 2-3.INSULATION RESISTANCE: 1000MΩ Min
 - 2-4.DIELECTRIC WITHSTANDING : 1000V AC
- 3.ENVIRONMENTAL PERFORMANCE:
 - 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: PE BAG
- 5.P/N:

C2004 W 0-1 XX 1 X X 0

SERIES NO: _____ COLOR: K-WHITE
 CONNECTOR: _____ PLATING: A-ALL AU G/F
 W-WAFER C-BRIGHT TIN
 ANGLE: _____ TERMIPOINT: 1-DIP
 0-180° _____ PIN Q'PY: 04 PIN
 ROW NO: _____
 1-SINGLE ROW

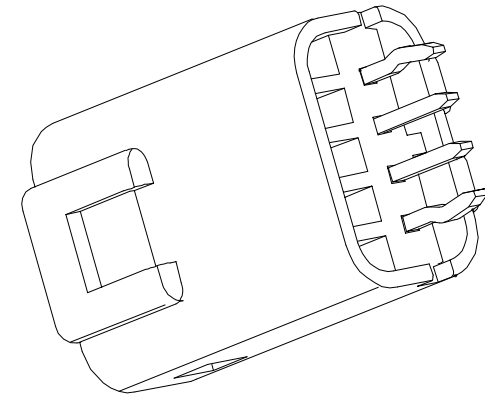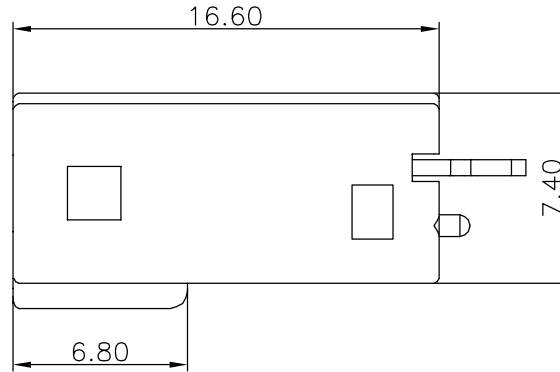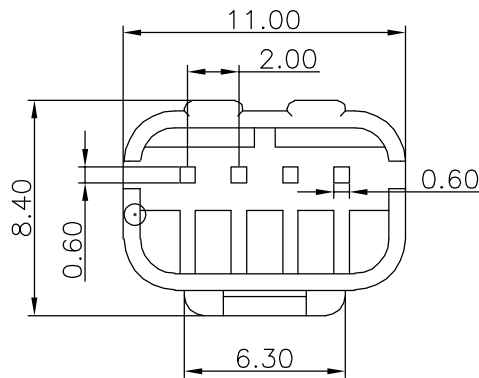

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	C2004W0-1XX1XX0	ENDE05	
			UNIT: mm	0.00±0.25	X'±3'	CHECK	XueZe_Ma	22.03.19	TITLE:		REV: A0 SHEET: 3/3
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.03.19	Pitch2.00mm JWPF 180°单排带柱防水IP67 打外K Wafer		