
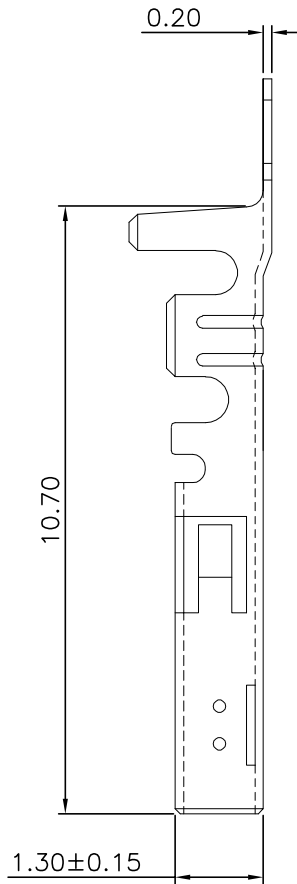


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS

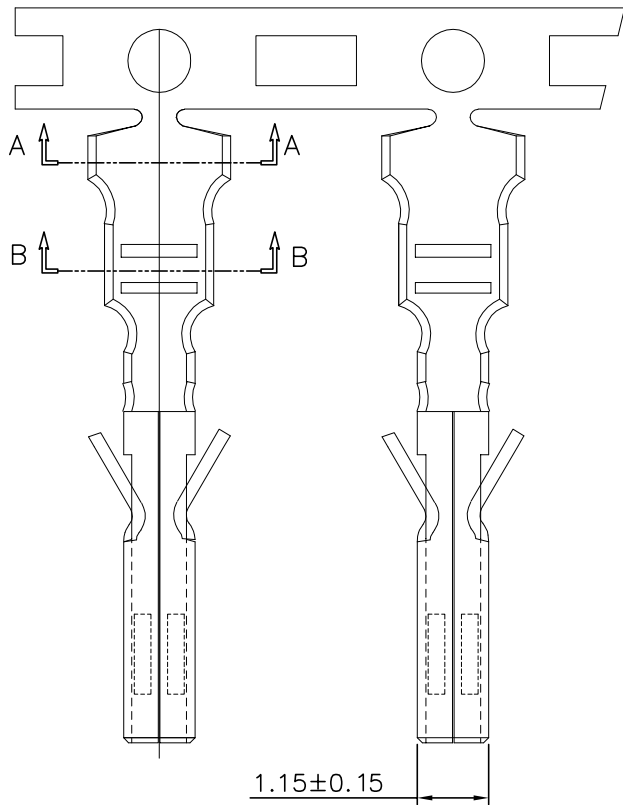

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.T-TERMINAL: PHOSPHOR BRONZE
 - 2.PLATING SPECIFICATION:
2-1.T-TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
 - 3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 5A
3-2.INSULATION RESISTANCE: 1000 MΩ Min
3-3.CONTACT RESISTANCE : 10mΩ MAX
3-4.WITHSTANDING VOLTAGE: 1000V AC
 - 4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+105°C.
 - 5.PACKAGE SPEC : REEL
 - 6.SUITABLE C3030 SERIES HOUSING
 - 7.P/N:

C3030 T F X-X

SERIES NO: _____



CONNECTOR: _____

MALE FEMALE: _____

F-FEMALE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN
1-G/F

METAL:
P-PHOSPHOR BRONZE
B-BRASS

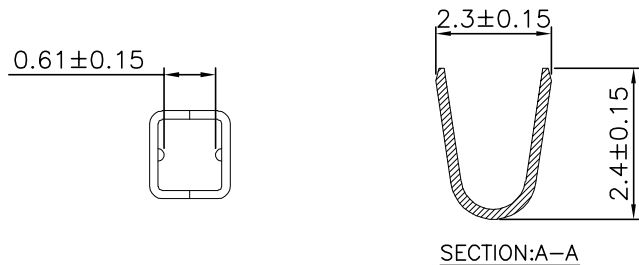

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C3030TFP-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	gold flash	10,000pcs
C3030TFP-C	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Tin Plated	10,000pcs
C3030TFP-1	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Contact Gold Flash Bottom Nickel	10,000pcs

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	Wang_jr	21.01.13	C3030TFX-X	ENDE05
			0.0±0.35	X°REF±6'		DESIGNER	Ding_bo	21.01.13	
			UNIT:mm	0.00±0.25		X°±3'	DESIGNER	Ding_bo	21.01.13
			SIZE: A4	0.000±0.10		X°X' ±2'	DRAWN	Ou_jian	21.01.13
								TITLE:	Pitch 3.00 mm 母端子AWG #20~#24



WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1