
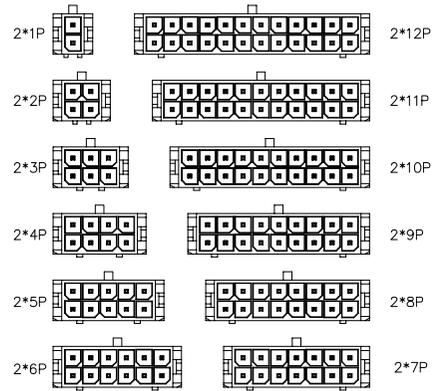
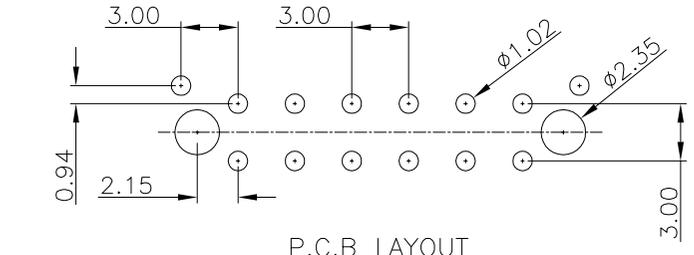
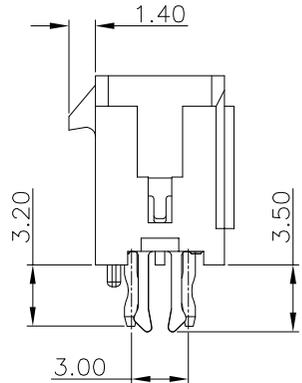


The product using material and processing must conform to the "W-PZ-001" HSF technical standard control requirements

RoHS+HF

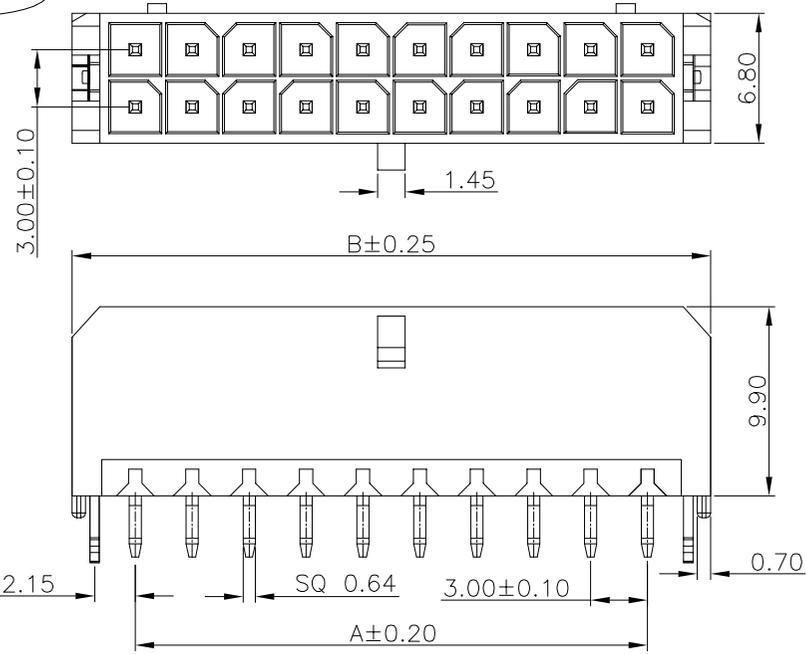

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: LCP, UL94V-0
    - CONTACTS: BRASS
    - Board Lock: BRASS
  - PLATING SPECIFICATION:
    - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
    - Board Lock: MATTE TIN PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:
    - RETENTIVITY FORCE: 0.3KGF/pin min
    - DURABILITY: 30 CYCLES.
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 5A AC/DC  
RATED VOLTAGE : 250V AC/DC
    - CONTACT RESISTANCE: 10 mΩ MAX
    - INSULATION RESISTANCE: 100MΩ Min
    - DIELECTRIC WITHSTANDING : 1000V
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC: TRAY
  - P/N:

SERIES NO: C3030 W 0 1-2 XX 1 X X X

CONNECTOR: W-WAFER

ANGLE: 0-180°

TYPE: 1-TYPE 1

ROW NO: 2-DOUBLE ROW

PIN Q'PY: 02~24

WATER CODE: 0-N/A

COLOR: A-BLACK, S-NATURE

PLATING: A-ALL AU G/F, C-BRIGHE TIN, D-MATTE Tin

TERMIPOINT: 1-DIP

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
2*01	--	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A1	SHEET: 1/2
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES								
A1	PART NUMBER RENEWAL	23.09.13	0.00±0.25	X'±3°	DESIGNER	Han_Gao	23.09.13						
			0.00±0.10	X'X' ±2°	DRAWN	LX_HOU	23.09.13						






The product using material and processing must conform to the "W-PZ-001" HSF technical standard control requirements


包装说明:

- 1、注意产品方向不可放反且需一致;
- 2、每1KPCS产品为一扎, 一盘一盖, 然后用PE膜缠捆; 套入防水袋
- 3、装箱与贴标签, 注意产品不可少数、多数、方向需一致;
- 4、外箱包装均需贴对应产品标签, 尾数箱需用不影响品质之物品填充, 并注明尾数。

RoHS+HF

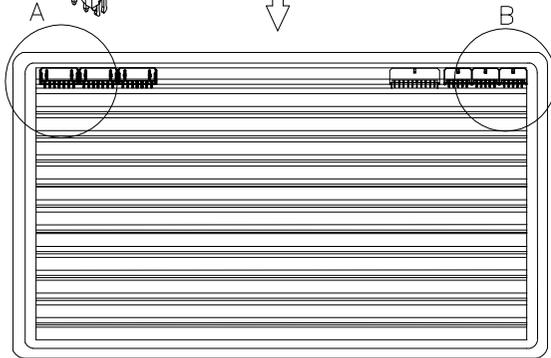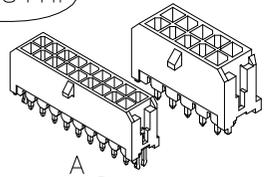


180度DIP摆放方向  
(卡点朝上)

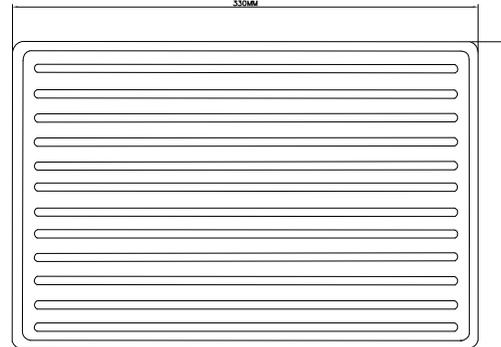


1680	84	2X12P
1920	96	2X11P
1920	96	2X10P
2160	108	2X9P
2400	120	2X8P
2880	144	2X7P
3120	156	2X6P
3840	192	2X5P
4560	228	2X4P
5520	276	2X3P
7440	372	2X2P
10800	540	2X1P
PCS/Cartron	PCS/Tray	Circuit

示图一(底盘):




90度DIP摆放方向  
(卡点朝下)

示图二: 盖子(1盘一盖)

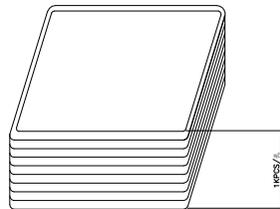

示图三: 1KPCS盘/扎

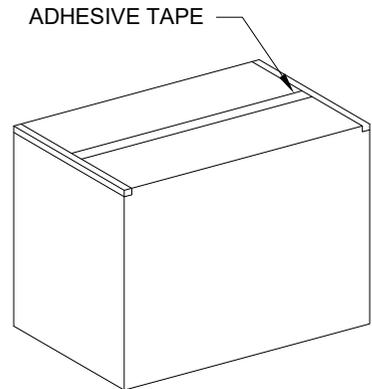

示图五: 纸箱35\*28.5\*32CM

示图四: 防水袋, (55+19)\*61CM 四方袋(防水袋)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.13	C3030W01-2XX1XXX	ENDE05		
A1	PART NUMBER RENEWAL	23.09.13	UNIT: mm	0.00±0.25	X*±3°	DESIGNER	Han_Gao	23.09.13	TITLE:		REV: A1	SHEET: 2/2
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LX_HOU	23.09.13	Pitch 3.00 mm 180° 双排打K 带叉带定位柱 立插Wafer			