


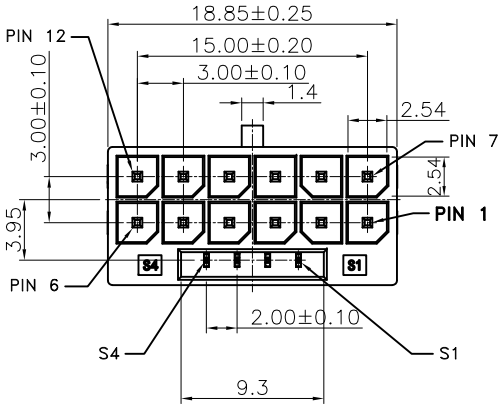



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

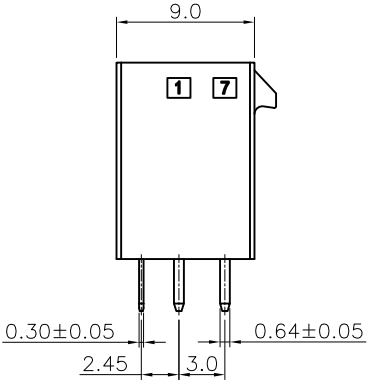


3D VIEW

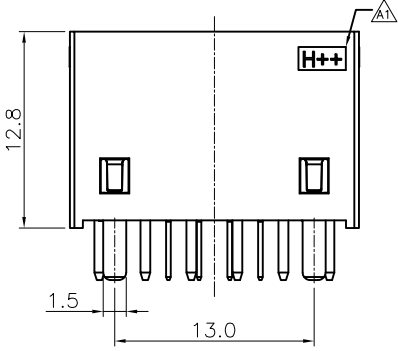

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STABLE
S2	CARD_CBL_PRES#
S3	SENSE0
S4	DO NOT USF

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA9T,UL94V-0
1-2.CONTACTS: HIGH CONDUCTIVITY COPPER C1100
1-3.SOLDER TABS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
2-2.SOLDER TABS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.4KGF/pin min
3-2.DURABILITY: 25 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 9.2A AC/DC
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKAGE SPEC: PE BAG
7.P/N:
C3030 W 0 3-2 XX 1 X X 0
SERIES NO:
CONNECTOR:
W-WAFER
ANGLE:
0-180°
TYPE:
3-TYPE 3
ROW NO:
2-DOUBLE ROW
COLOR:
A-BLACK
S-NATURE
PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin
TERMIPOINT:
1-DIP
PIN Q'PY:
12PIN

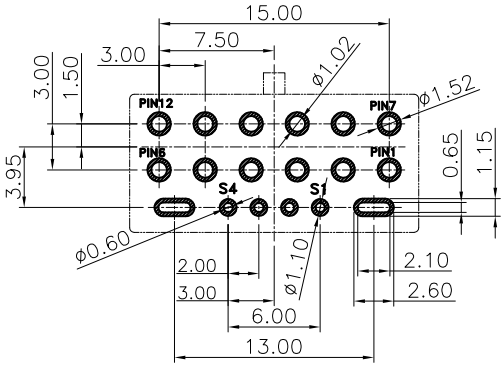

Recommended PCB Layout(Top View)
General Tolerance±0.05mm

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030W03-2XX1XX0	DWG.NO: ENDE05		WanLian Technology Co., Ltd
				LINEAR	ANGLES							
A0	NEW RELEASE	22.05.09		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.09.15				
A1	PART NUMBER RENEWAL	23.09.15		0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.09.15	TITLE: Pitch 3.0mm Pitch 180° 双排直插带扣 12+4pin Wafer 黑色 镀雾锡			
			UNIT:mm	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	23.09.15				
			SIZE: A4								REV: A1	SHEET: 1/2

