
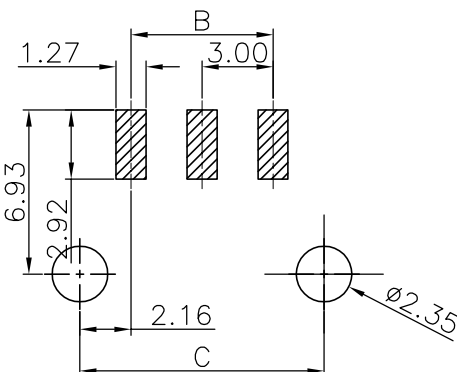
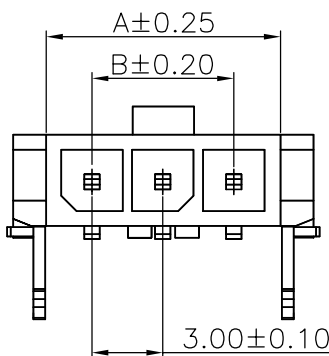
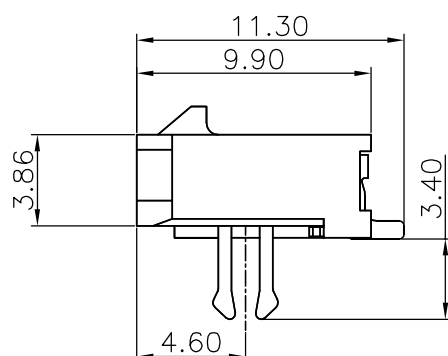
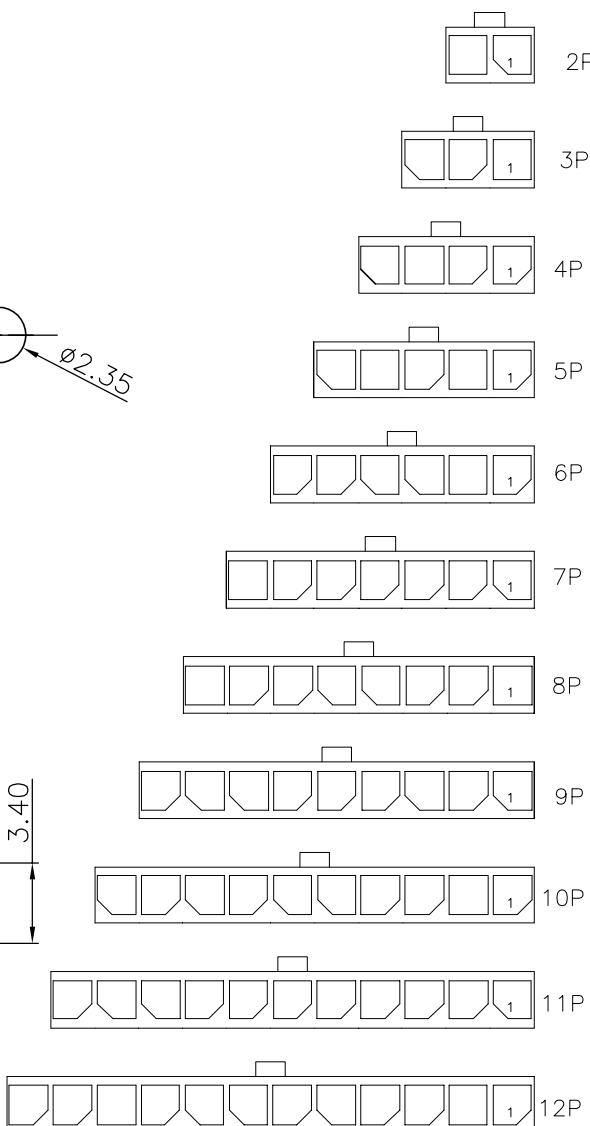


1	2	3	4	5	6	7	8																																																														
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements																																																																					
RoHS+HF																																																																					
																																																																					
P.C.B. LAYOUT																																																																					
																																																																					
																																																																					
				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: LCP,UL94V-0 1-2.CONTACTS: BRASS 1-3.SOLDER TABS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 2-2.SOLDER TABS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 1.0KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 5A AC/DC RATED VOLTAGE : 250V AC/DC 4-2.CONTACT RESISTANCE: 10 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: REEL 7.P/N: A1 C3030 W 9-1 XX 2 X X 0 SERIES NO: CONNECTOR: W-WAFER ANGLE: 9-90° 0-180° ROW NO: 1-SINGLE ROW PIN Q'PY: 02~12 COLOR: A-BLACK K-WHITE S-NATURE PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin TERMIPOINT: 2-SMT																																																																	
				<table border="1"><thead><tr><th rowspan="2">Circuit</th><th colspan="3">Dimensions (mm)</th><th rowspan="2">Circuit</th><th colspan="3">Dimensions (mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>A</th><th>B</th><th>C</th></tr></thead><tbody><tr><td>02</td><td>6.85</td><td>3.00</td><td>7.30</td><td>08</td><td>24.85</td><td>21.00</td><td>25.30</td></tr><tr><td>03</td><td>9.85</td><td>6.00</td><td>10.30</td><td>09</td><td>27.85</td><td>24.00</td><td>28.30</td></tr><tr><td>04</td><td>12.85</td><td>9.00</td><td>13.30</td><td>10</td><td>30.85</td><td>27.00</td><td>31.30</td></tr><tr><td>05</td><td>15.85</td><td>12.00</td><td>16.30</td><td>11</td><td>33.85</td><td>30.00</td><td>34.30</td></tr><tr><td>06</td><td>18.85</td><td>15.00</td><td>19.30</td><td>12</td><td>36.85</td><td>33.00</td><td>37.30</td></tr><tr><td>07</td><td>21.85</td><td>18.00</td><td>22.30</td><td></td><td></td><td></td><td></td></tr></tbody></table>				Circuit	Dimensions (mm)			Circuit	Dimensions (mm)			A	B	C	A	B	C	02	6.85	3.00	7.30	08	24.85	21.00	25.30	03	9.85	6.00	10.30	09	27.85	24.00	28.30	04	12.85	9.00	13.30	10	30.85	27.00	31.30	05	15.85	12.00	16.30	11	33.85	30.00	34.30	06	18.85	15.00	19.30	12	36.85	33.00	37.30	07	21.85	18.00	22.30				
Circuit	Dimensions (mm)			Circuit	Dimensions (mm)																																																																
	A	B	C		A	B	C																																																														
02	6.85	3.00	7.30	08	24.85	21.00	25.30																																																														
03	9.85	6.00	10.30	09	27.85	24.00	28.30																																																														
04	12.85	9.00	13.30	10	30.85	27.00	31.30																																																														
05	15.85	12.00	16.30	11	33.85	30.00	34.30																																																														
06	18.85	15.00	19.30	12	36.85	33.00	37.30																																																														
07	21.85	18.00	22.30																																																																		
REV. REVISION RECORD DATE				SCALE: 1:1 NAME DATE PART.NO: DWG.NO:																																																																	
AO NEW RELEASE 21.11.17				C3030W9-1XX2XX0 ENDE05																																																																	
A1 PART NUMBER RENEWAL 23.09.15				TITLE: Pitch3.00mm 90°单排卧贴带扣带鱼叉 Wafer																																																																	
UNIT:mm 0.00±0.25 X'±3°				REV: A1 SHEET: 1/2																																																																	
SIZE: A4 0.000±0.10 X'X' ±2°																																																																					
1	2	3	4	5	6	7	8																																																														

7.P/N:  C3030 W 9-1 XX 2 X X 0

SERIES NO: _____

CONNECTOR: _____

W-WAFER

ANGLE: _____

9-90°

0-180°

ROW NO: _____

1-SINGLE ROW

PIN Q'PY: _____

02~12

COLOR:

A-BLACK

K-WHITE

S-NATURE

PLATING:

A-ALL AU G₂

C-BRIGHT TIN


D-MATTE Tin

TERMPOINT:

2-SMT

Circuit	Dimensions (mm)			Circuit	Dimensions (mm)		
	A	B	C		A	B	C
02	6.85	3.00	7.30	08	24.85	21.00	25.30
03	9.85	6.00	10.30	09	27.85	24.00	28.30
04	12.85	9.00	13.30	10	30.85	27.00	31.30
05	15.85	12.00	16.30	11	33.85	30.00	34.30
06	18.85	15.00	19.30	12	36.85	33.00	37.30
07	21.85	18.00	22.30				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.15				
A1	PART NUMBER RENEWAL	23.09.15		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.09.15	TITLE: Pitch3.00mm 90°单排卧贴带扣带鱼叉 Wafer			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LX_HOU			23.09.15	REV: A1
			SIZE: A4	0.000±0.10	X°X' ±2°							

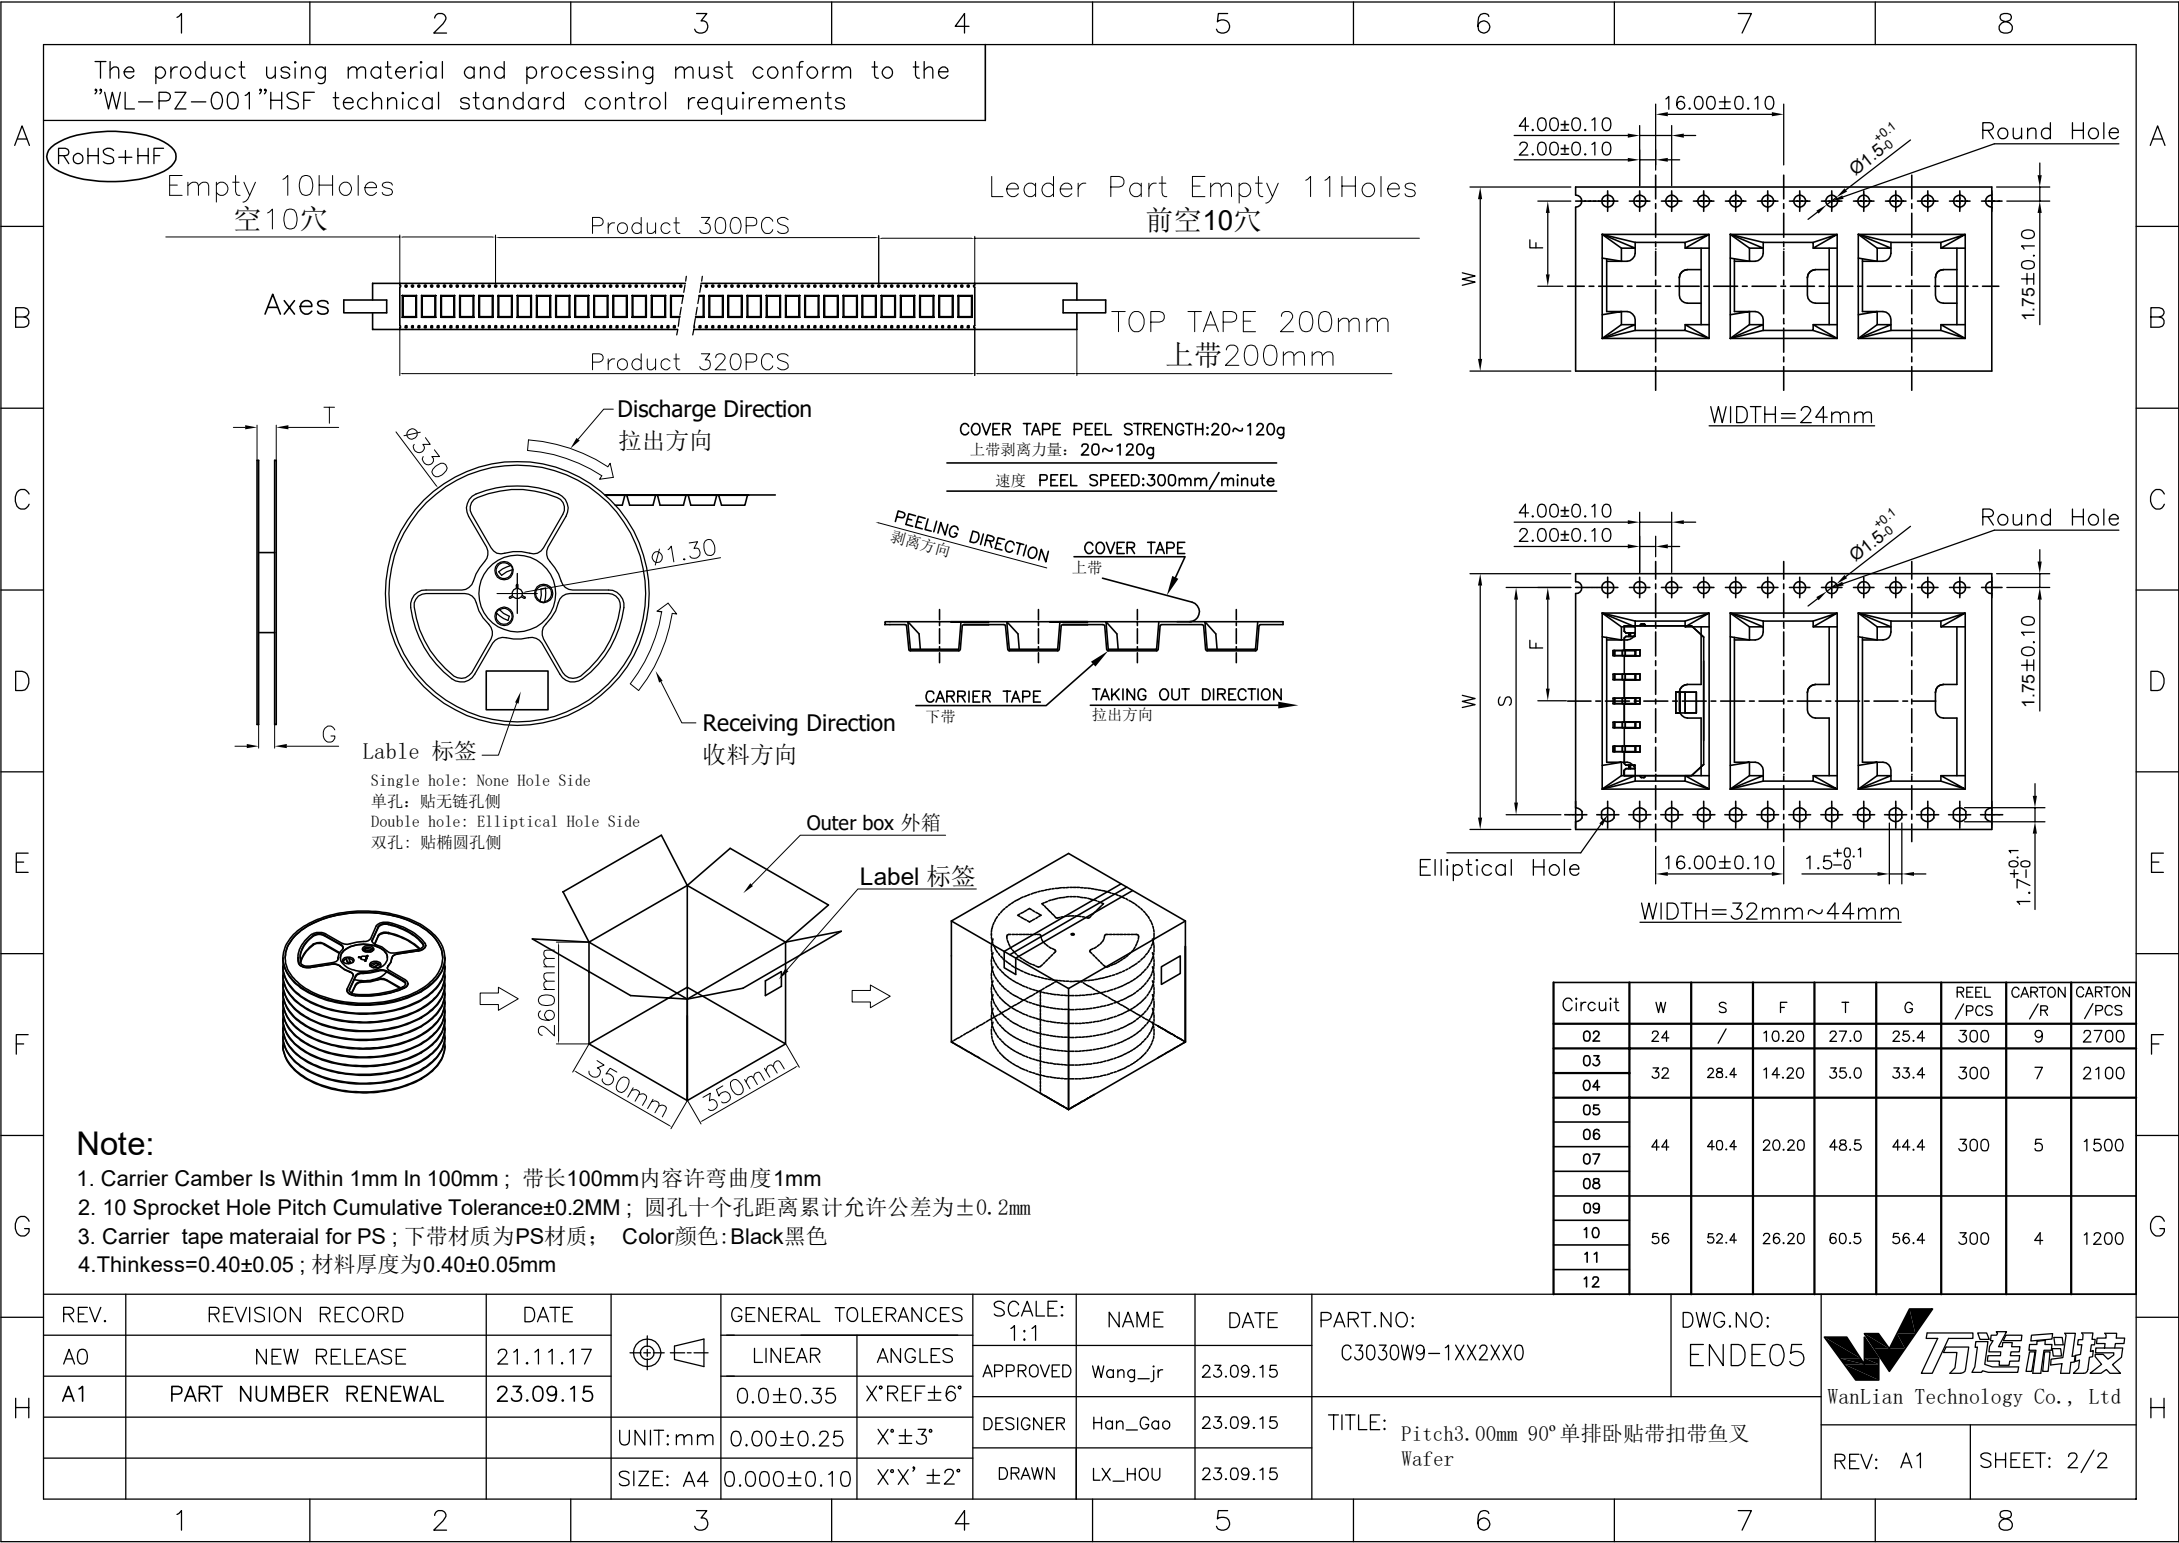

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

Empty 10Holes
空10穴


Product 300PCS

Leader Part Empty 11Holes
前空10穴



Axes

Product 320PCS

TOP TAPE 200mm
上带200mm

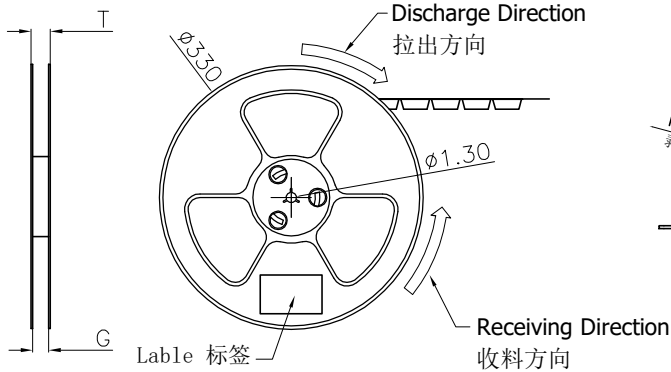

COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

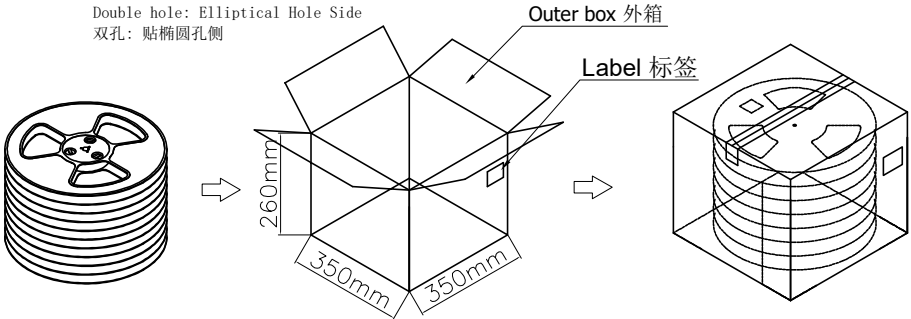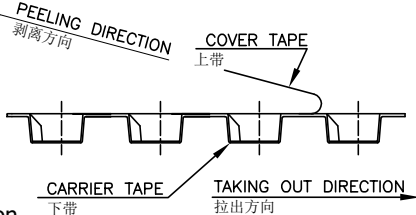

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距累计允许公差为±0.2mm
- Carrier tape materalial for PS ; 下带材质为PS材质; Color颜色:Black黑色
- Thinkess=0.40±0.05 ; 材料厚度为0.40±0.05mm

Circuit	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
02	24	/	10.20	27.0	25.4	300	9	2700
03	32	28.4	14.20	35.0	33.4	300	7	2100
04								
05								
06								
07	44	40.4	20.20	48.5	44.4	300	5	1500
08								
09								
10								
11	56	52.4	26.20	60.5	56.4	300	4	1200
12								

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.15	TITLE: Pitch3.00mm 90° 单排卧贴带扣带鱼叉 Wafer	REV: A1	
A1	PART NUMBER RENEWAL	23.09.15		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.15			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	LX_HOU	23.09.15			
			SIZE: A4	0.000±0.10	X°X' ±2°						