

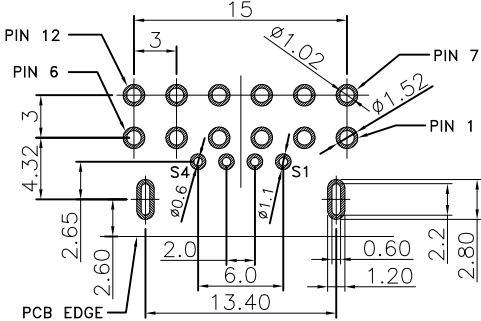




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS

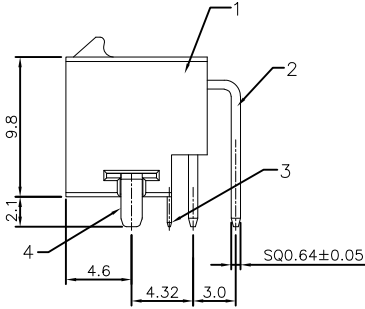

Recommended PCB Layout(Top View)
General Tolerance±0.05mm

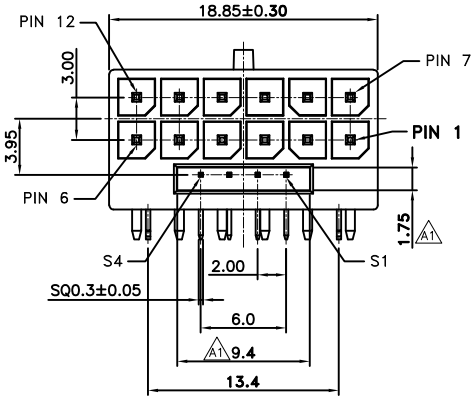

3D VIEW



- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA9T,UL94V-0
 - 1-2.CONTACTS: High conductivity copper
 - 1-3.PWR & GND PIN : C1100 ;
 - 1-4.Sense PIN : C2680
 - 1-5.Board LOCK: SUS201
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - MATTE Tin PLATED OVER ALL.
 - 2-2.PWR & GND PIN:
 - 80u"Min Matte-Tin over 30u"Min NICKEL
 - 2-3.Sense PIN
 - 80u"Min Matte-Tin over 30u"Min NICKEL
 - 2-4.Board LOCK
 - 80u"Min Matte-Tin over 30u"Min NICKEL
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 1.4KGF/pin min
 - 3-2.DURABILITY: 25 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 9.2A AC/DC
 - RATED VOLTAGE : 250V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 1500V
 - 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
 - 6.PACKAGE SPEC: REEL
 - 7.P/N:





SERIES NO: C3030 W 9 3-2 XX 1 X X 0
CONNECTOR: W-WAFER
ANGLE: 9-90°
TYPE: 3-TYPE 3
ROW NO: 2-DOUBLE ROW
COLOR: A-BLACK S-NATURE
PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin
TERMPOINT: 1-DIP
PIN Q'PY: 12PIN

PIN	SIGNAL	PIN NO.
	PWR PIN	1~6
	GND PIN	7~12
S1		CARD_PWR_STABLE
S2		CARD_CBL_PRES#
S3		SENSE0
S4		DO NOT USF

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.15	C3030W93-2XX1XX0	ENDE05	
A1	PART NUMBER RENEWAL	23.09.15	UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.15	TITLE: Pitch 3.0mm Pitch 90° 双排卧插带扣 12+4Wafer		REV: A1 SHEET: 1/2
				0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	23.09.15			
			SIZE: A4	0.000±0.10	X°X' ±2°						

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

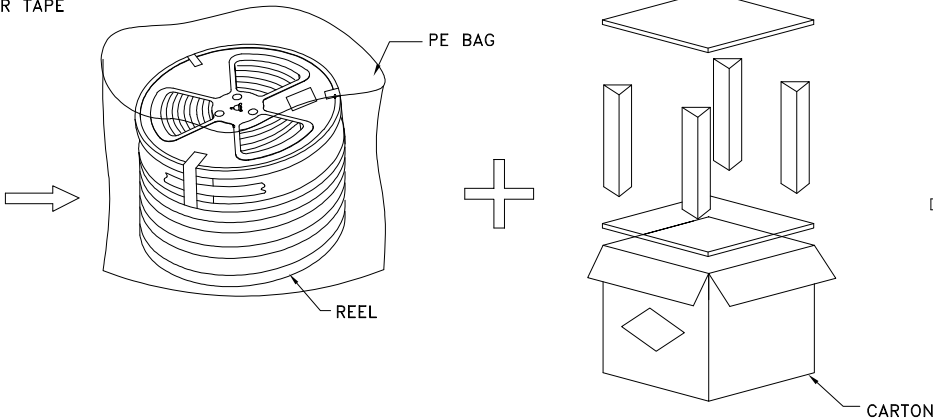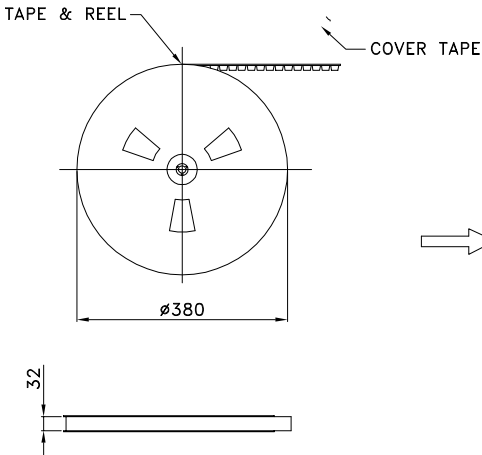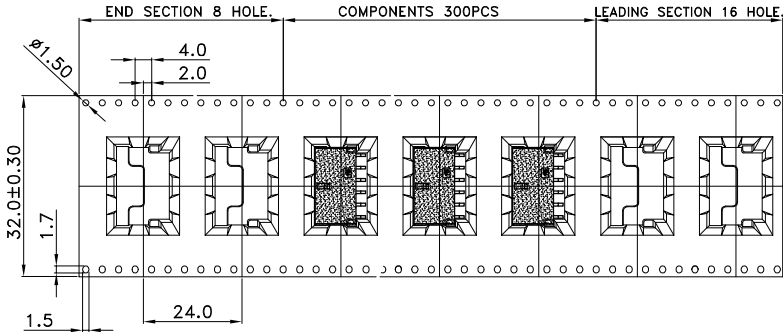

Packing

Circuit	PCS/Reel	Reels/CARTON	PCS/CARTON
12+4	300	8	2,400

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030W93-2XX1XX0	DWG.NO: ENDE05			
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.15					
A1	PART NUMBER RENEWAL	23.09.15		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.09.15					
			UNIT:mm	0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	23.09.15	TITLE: Pitch 3.0mm Pitch 90° 双排卧插带扣 12+4Wafer				
			SIZE: A4	0.000±0.10	X'X' ±2°								
											WanLian Technology Co., Ltd	REV: A1	SHEET: 2/2