
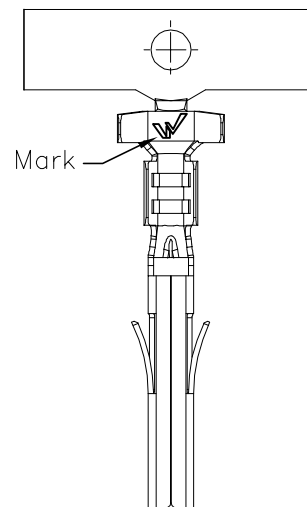





(RoHS)

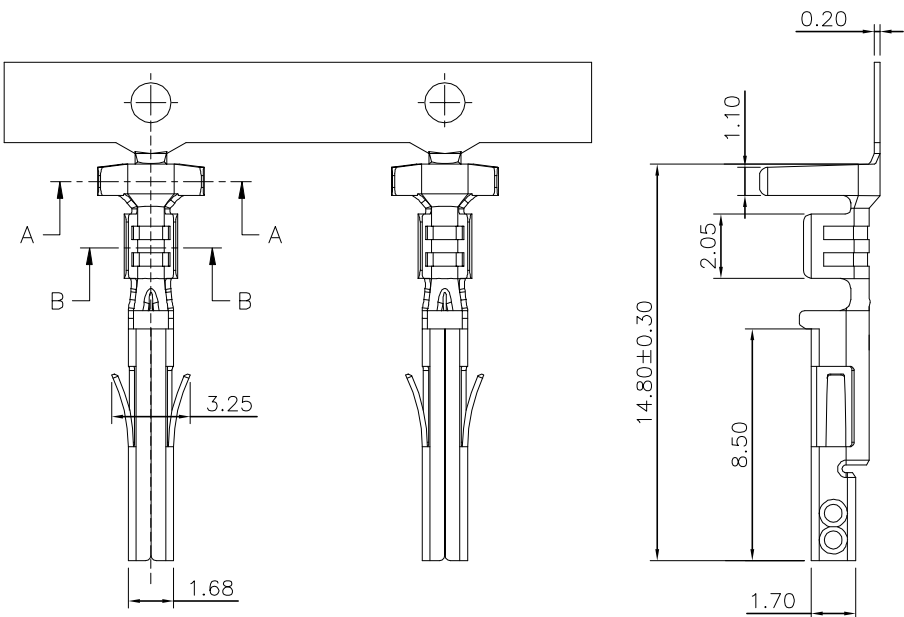

背部示意图

6.P/N:

C4201 T 2 F X-X-R
 SERIES NO: _____
 CONNECTOR: _____
 T-TERMINAL _____
 TYPE CODE:2 _____
 MALE FEMALE: _____
 F-FEMALE _____
 M-MALE _____
 PLATING: _____
 C-BRIGHT TIN _____
 METAL: _____
 P-PHOSPHOR BRONZE _____



额定电流 Rated Current(Max)				
线规 \ PIN数	2-3	4-6	7-10	12-24
16AWG	9A	8A	7A	6A
18AWG	9A	8A	7A	6A
20AWG	7A	6A	5A	5A
22AWG	5A	4A	4A	4A
24AWG	4A	3A	3A	3A
26AWG	3A	2A	2A	2A
28AWG	2A	1A	1A	1A

Ordering Information & Specifications

Wire Range	Insulation O.D.	Qty/reel
AWG#16-#20	3.10mm(max)	5,000pc

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C4201T2FX-X-M	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28			
				0.0±0.35	X*REF±6°						
			UNIT: mm	0.00±0.25	X*±3°	CHECK	XueZe_Ma	22.10.28	TITLE: Pitch 4.2mm Female 高脚 端子		
				SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LanXuan_Hou		22.10.28	
										REV: AO	SHEET: 1/1