













	1	2	3	4	5	6	7	8							
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements															
A	RoHS														
B															
C															
D															
E															
F															
G															
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd			
	A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	C4201W03-2XX1XXX-MR					
					0.0±0.35	X°REF±6°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 4.2mm 双排 180° DIP Wafer 空心针					
					UNIT: mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.03.19					
				SIZE: A4	0.000±0.10	X°X' ±2°							REV: A0	SHEET: 2/3	
	1	2	3	4	5	6	7	8							

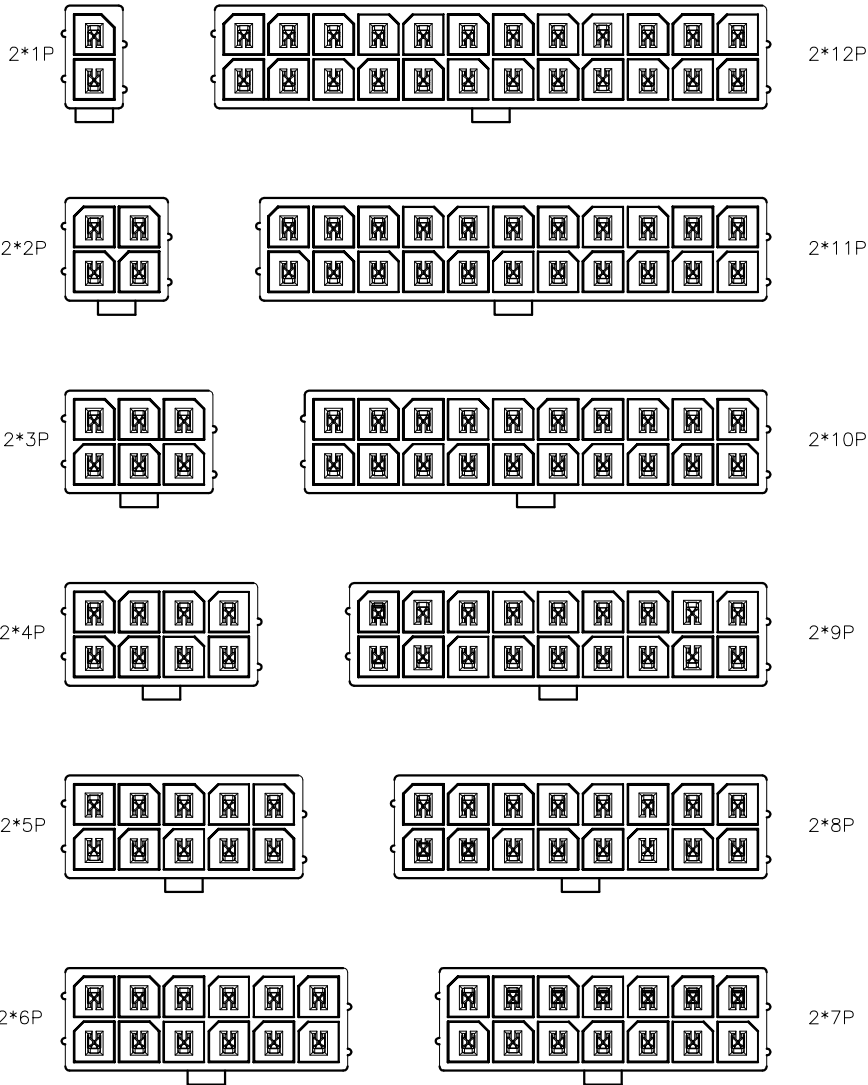

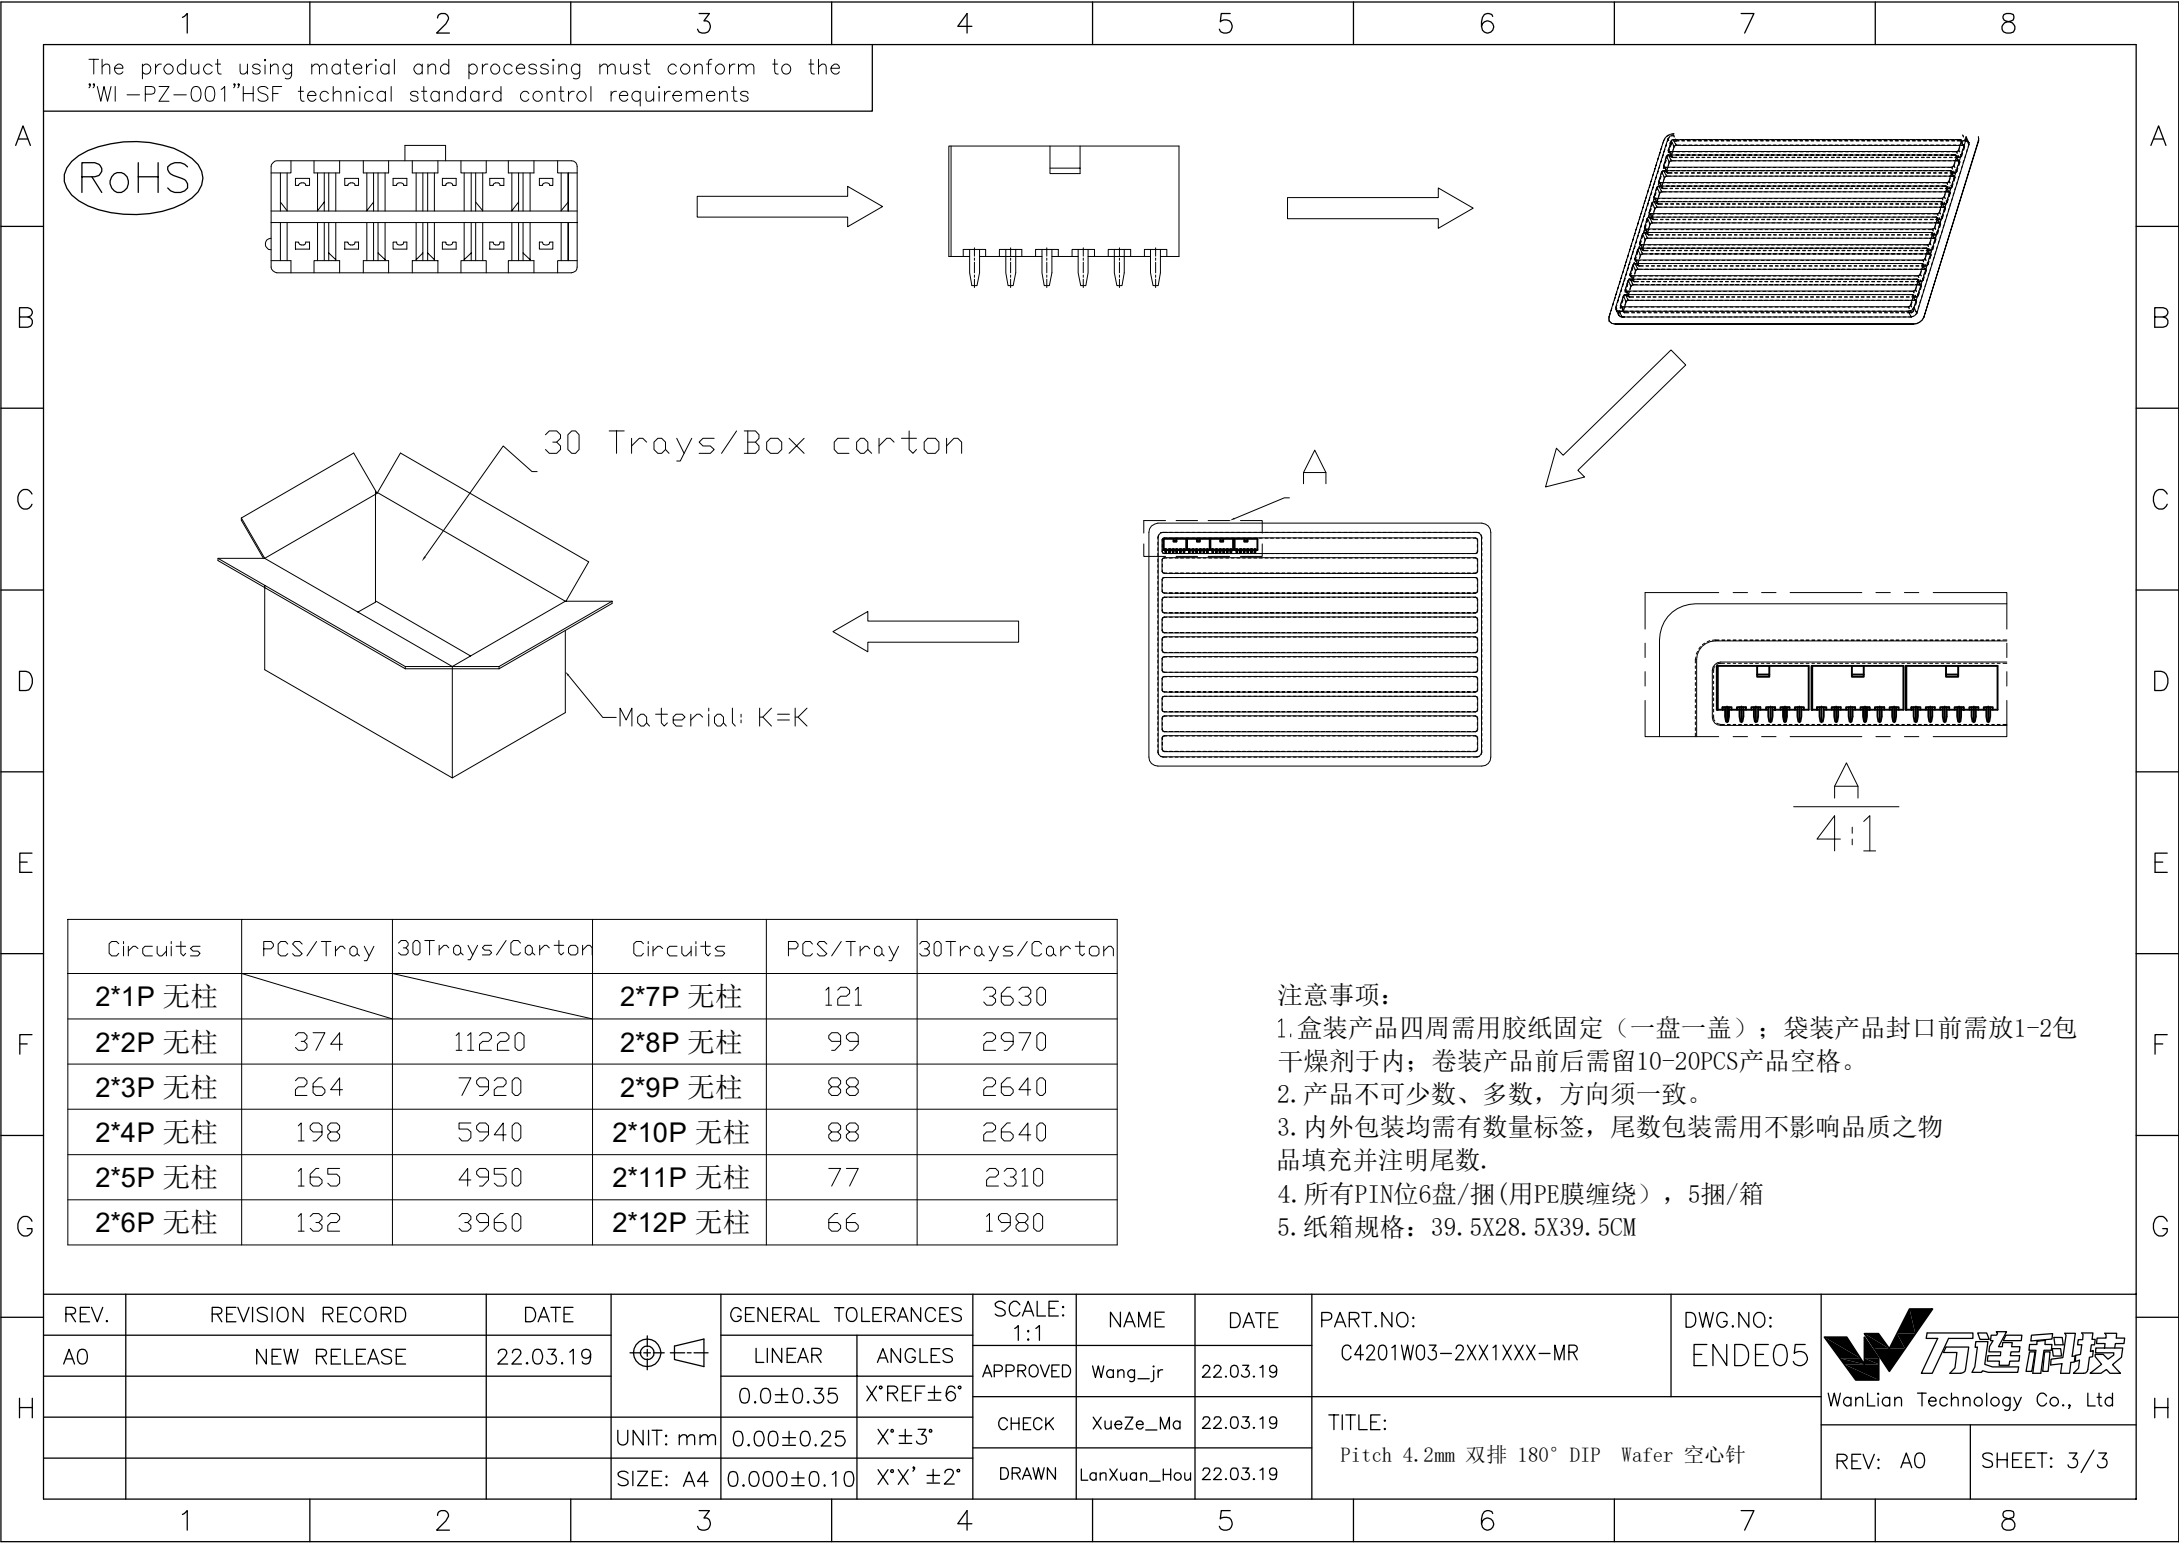

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

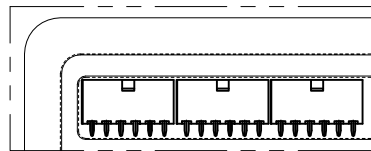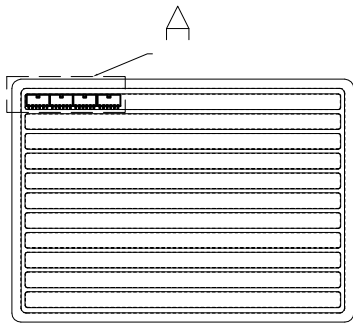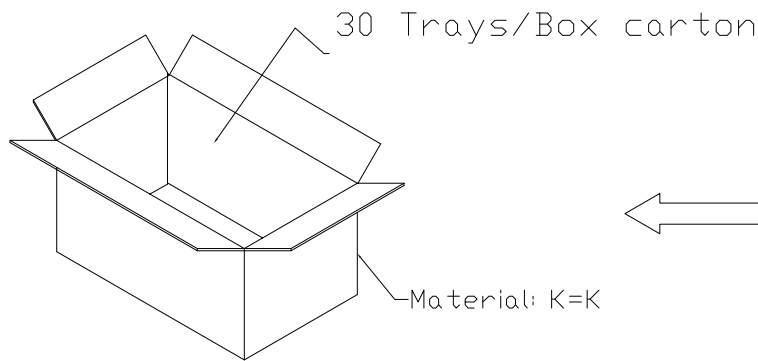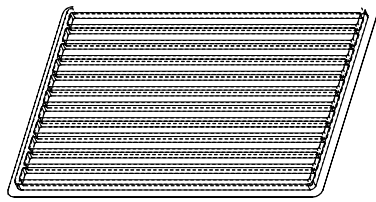

A
4:1

Circuits	PCS/Tray	30Trays/Carton	Circuits	PCS/Tray	30Trays/Carton
2*1P 无柱			2*7P 无柱	121	3630
2*2P 无柱	374	11220	2*8P 无柱	99	2970
2*3P 无柱	264	7920	2*9P 无柱	88	2640
2*4P 无柱	198	5940	2*10P 无柱	88	2640
2*5P 无柱	165	4950	2*11P 无柱	77	2310
2*6P 无柱	132	3960	2*12P 无柱	66	1980

- 注意事项:
1. 盒装产品四周需用胶纸固定（一盘一盖）；袋装产品封口前需放1-2包干燥剂于内；卷装产品前后需留10-20PCS产品空格。
 2. 产品不可少数、多数，方向须一致。
 3. 内外包装均需有数量标签，尾数包装需用不影响品质之物品填充并注明尾数。
 4. 所有PIN位6盘/捆(用PE膜缠绕)，5捆/箱
 5. 纸箱规格：39.5X28.5X39.5CM

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C4201W03-2XX1XXX-MR	DWG.NO: ENDE05	
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19			
				0.0±0.35	X*REF±6°				CHECK	XueZe_Ma	
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou			
			SIZE: A4	0.000±0.10	X°X'±2°	TITLE: Pitch 4.2mm 双排 180° DIP Wafer 空心针				REV: A0	SHEET: 3/3