


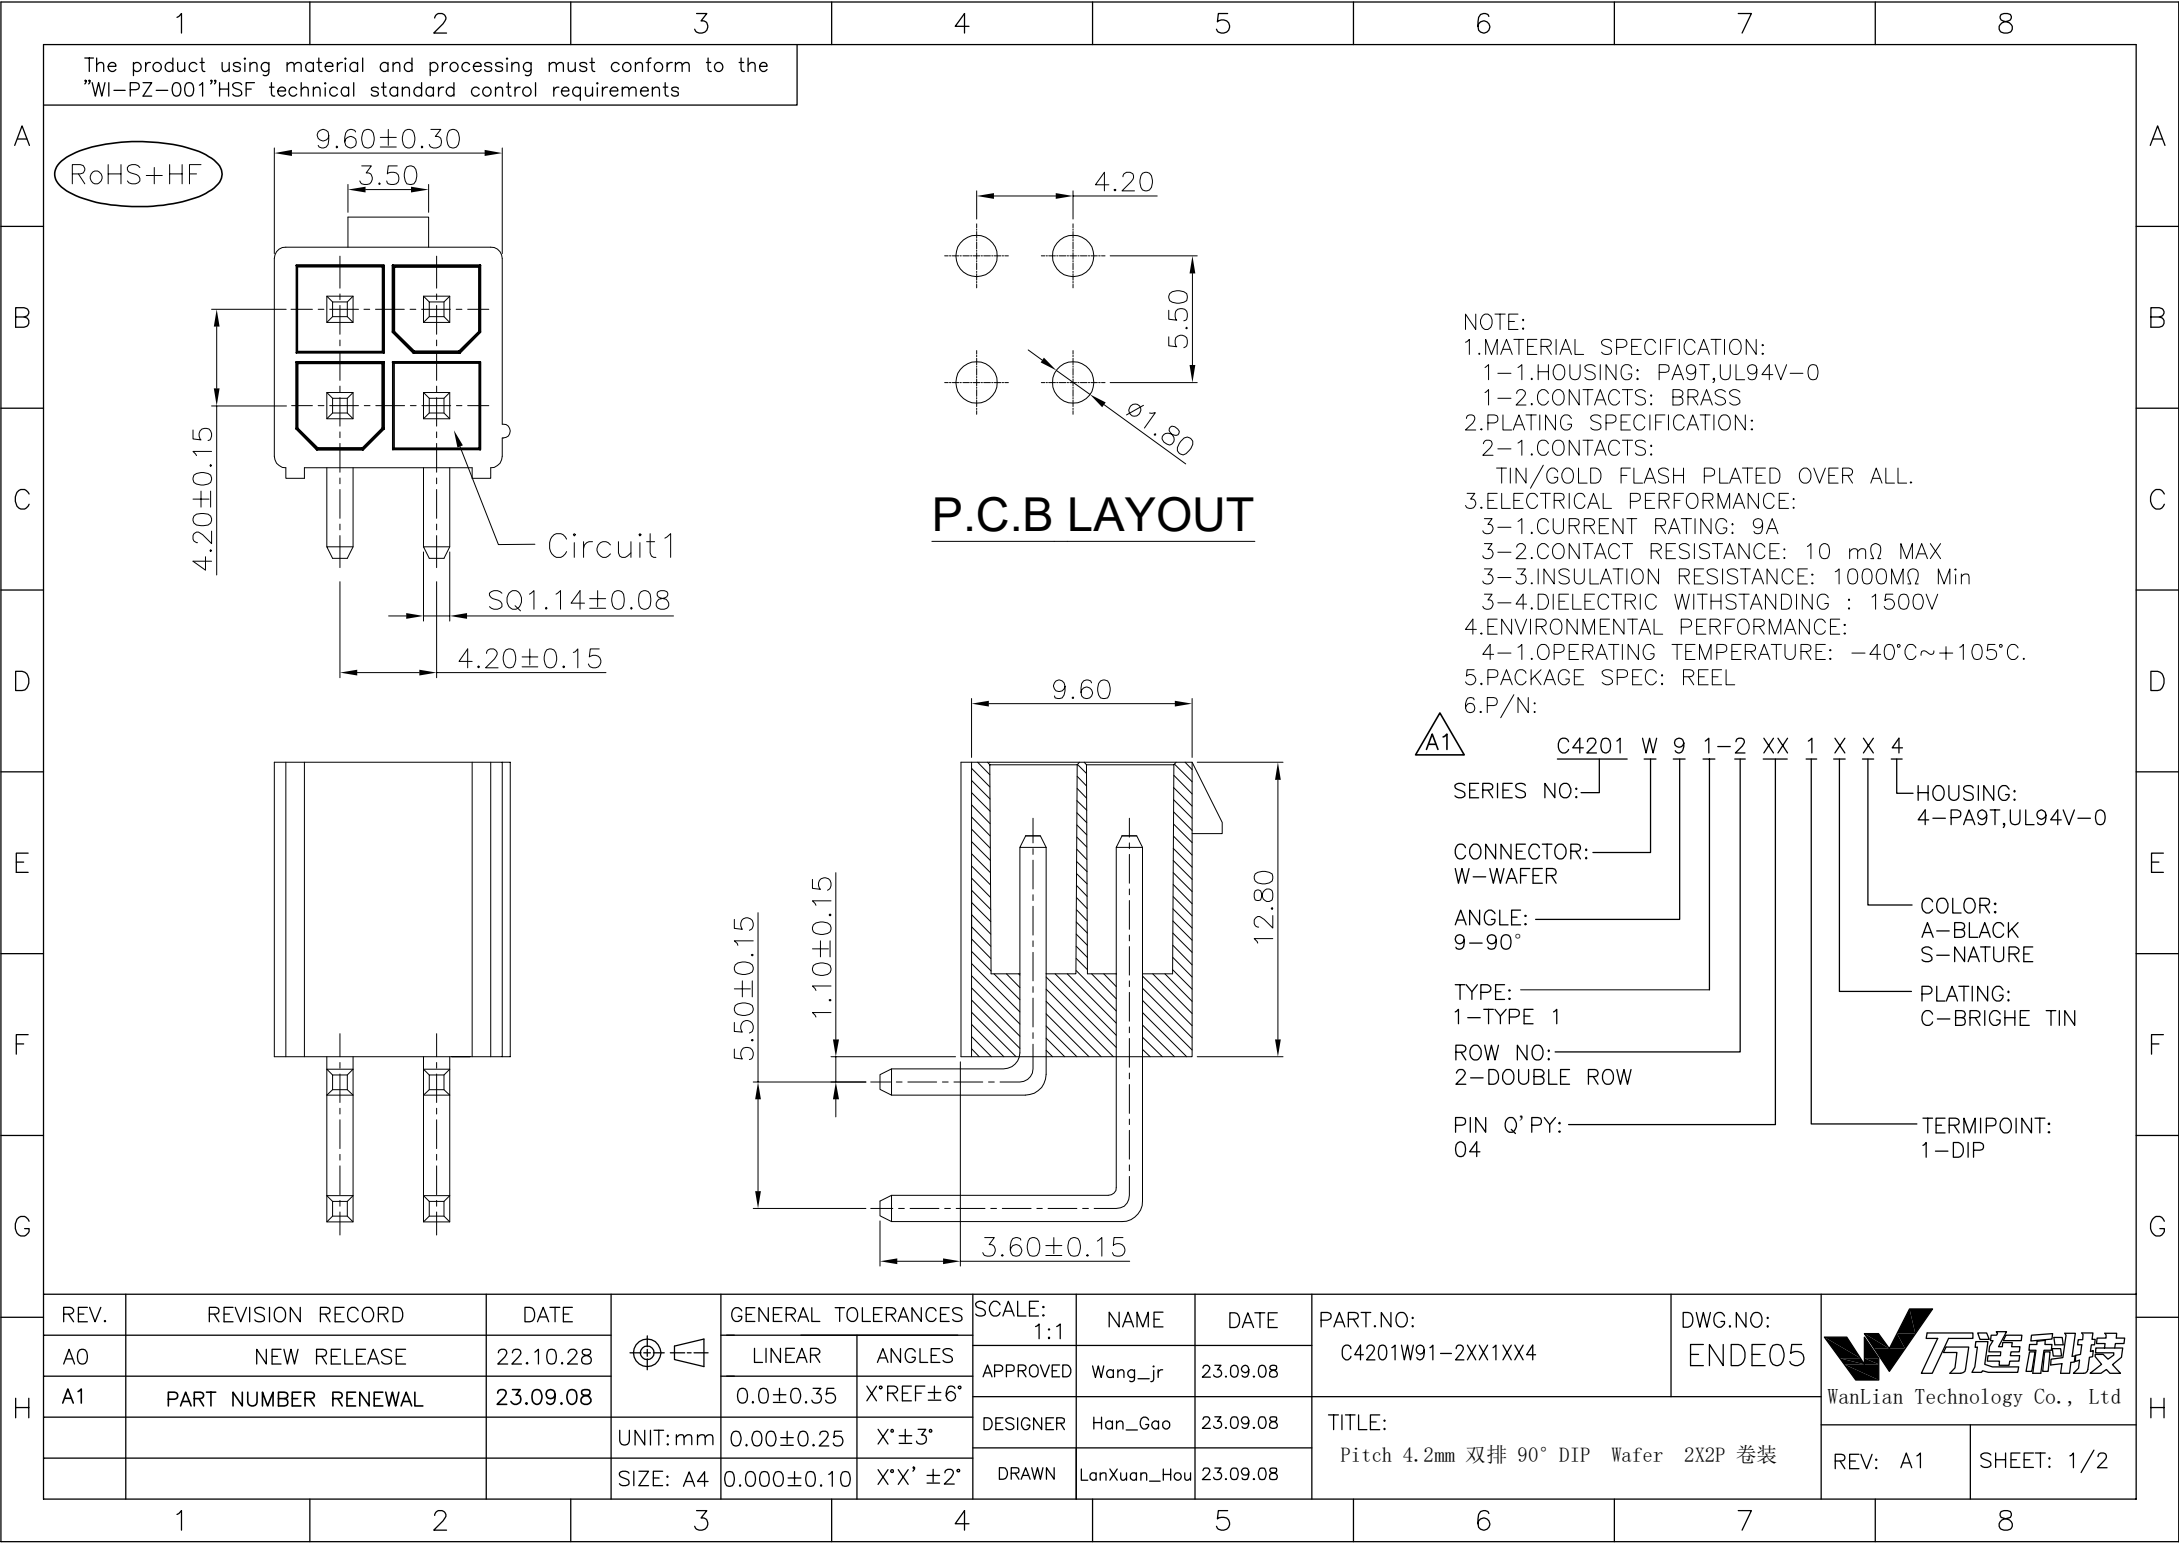

P.C.B LAYOUT

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA9T,UL94V-0
 - 1-2.CONTACTS: BRASS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 9A
 - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1500V
 - 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 - 5.PACKAGE SPEC: REEL
 - 6.P/N:

A1

C4201 W 9 1-2 XX 1 X X 4

SERIES NO: _____

CONNECTOR: _____

W-WAFER

ANGLE: _____

9-90°

TYPE: _____

1-TYPE 1

ROW NO: _____

2-DOUBLE ROW

PIN Q' PY: _____

04

HOUSING: _____

4-PA9T,UL94V-0

COLOR: _____

A-BLACK

S-NATURE

PLATING: _____

C-BRIGHE TIN

TERMPOINT: _____

1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C4201W91-2XX1XX4	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.08				
A1	PART NUMBER RENEWAL	23.09.08		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.09.08				
			UNIT:mm	0.00±0.25	X*±3°	DRAWN	LanXuan_Hou	23.09.08	TITLE: Pitch 4.2mm 双排 90° DIP Wafer 2X2P 卷装		REV: A1	SHEET: 1/2
			SIZE: A4	0.000±0.10	X*X' ±2°							

