
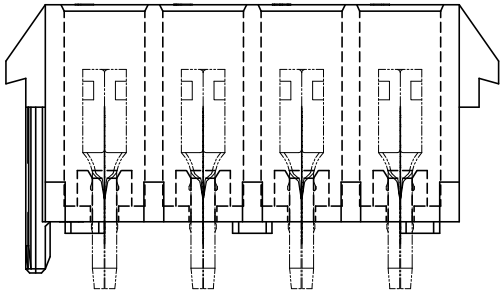


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

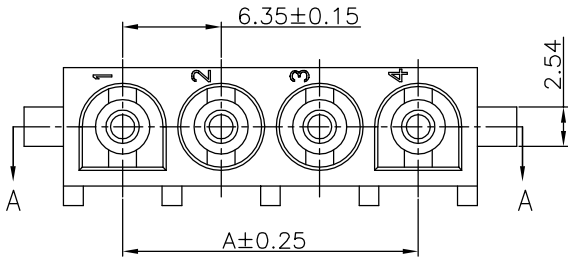

SECTION:A-A

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66
 - 1-2.CONTACTS: BRASS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 15A
 - RATED VOLTAGE : 600V
 - 3-2.CONTACT RESISTANCE: 3.5 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 5000V AC
 - 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 5.MATES WITH C6351 SERIES MALE HOUSING
 - 6.PACKAGE SPEC: PE BAG
 - 7.P/N:

SERIES NO: C6351 W 0 1-1 XX 1 X X X

CONNECTOR: W-WAFER

ANGLE: 0-180°

TYPE: 1-TYPE 1

ROW NO: 1-SINGLE ROW





PIN Q'PY: 02~06

HOUSING: 0-UL94V-0 2-UL94V-2

COLOR: S-NATURE

PLATING: C-BRIGHE TIN

TERMIPOINT: 1-DIP

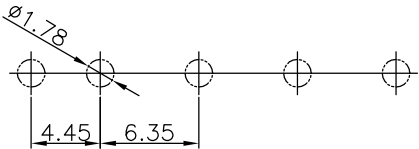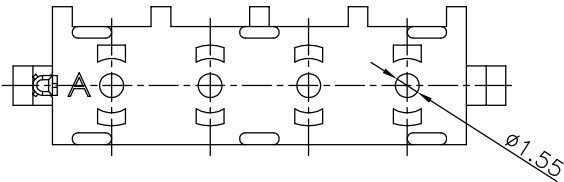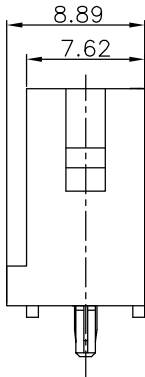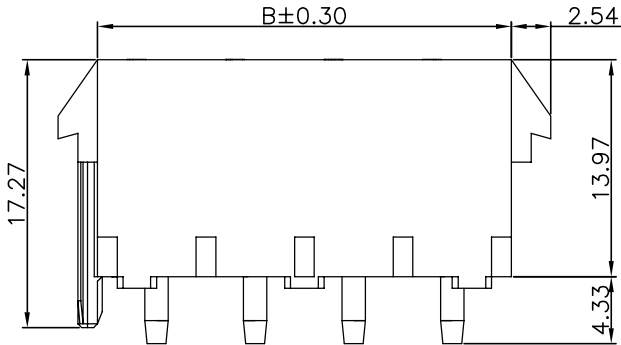

P.C.B LAYOUT

Circuit No.	Dimensions	
	A	B
02P	6.35	13.97
03P	12.70	20.32
04P	19.05	26.67
05P	25.40	33.02
06P	31.75	39.37

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C6351W01-1XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19			
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou			
			SIZE: A4	0.000±0.10	X°X' ±2°	TITLE: Pitch 6.35mm 单排 母座 带柱				REV: A0	SHEET: 1/1