

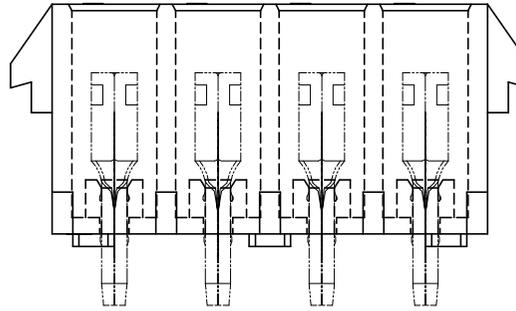
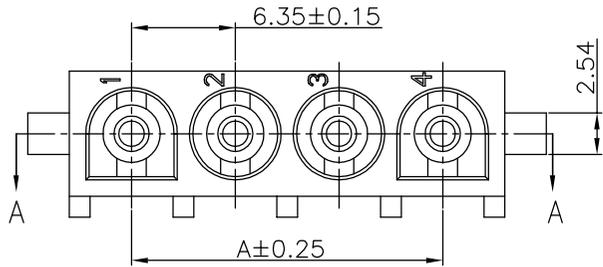
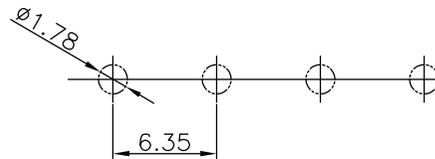
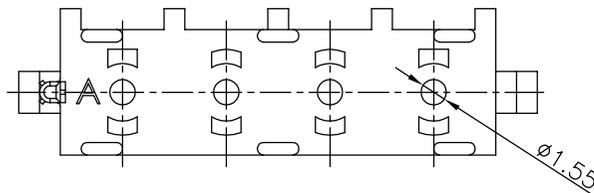


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

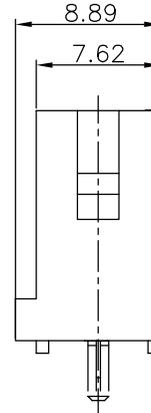

SECTION:A-A

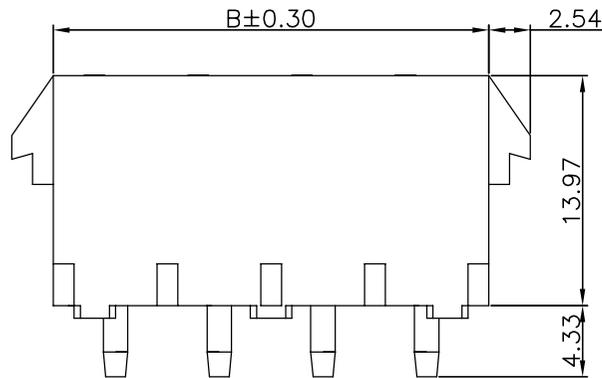

P.C.B LAYOUT

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 15A
RATED VOLTAGE : 600V
 - 3-2.CONTACT RESISTANCE: 3.5 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 5000V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.MATES WITH C6351 SERIES MALE HOUSING
- 6.PACKAGE SPEC: PE BAG
- 7.P/N:

SERIES NO: C6351 W 0 3-1 XX 1 X X X
 CONNECTOR: W-WAFER
 ANGLE: 0-180°
 TYPE: 3-TYPE 3
 ROW NO: 1-SINGLE ROW
 PIN Q'PY: 02~06

HOUSING:
 0-UL94V-0
 2-UL94V-2

COLOR:
 S-NATURE

PLATING:
 C-BRIGHE TIN

TERMIPOINT:
 1-DIP

Circuit No.	Dimensions	
	A	B
02P	6.35	13.97
03P	12.70	20.32
04P	19.05	26.67
05P	25.40	33.02
06P	31.75	39.37

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	22.03.19	LINEAR	ANGLES	1:1	Wang_jr	22.03.19	C6351W03-1XX1XXX	ENDE05
			0.0±0.35	X'REF±6°	APPROVED	XueZe_Ma	22.03.19		
			0.00±0.25	X'±3'	CHECK	LanXuan_Hou	22.03.19	TITLE:	
			0.000±0.10	X'X' ±2'	DRAWN			Pitch 6.35mm 单排 母座 无柱	



WanLian Technology Co., Ltd
 REV: A0 SHEET: 1/1