



1 2 3 4 5 6 7 8

A

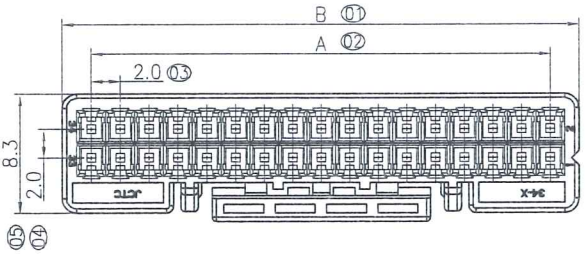


B

C

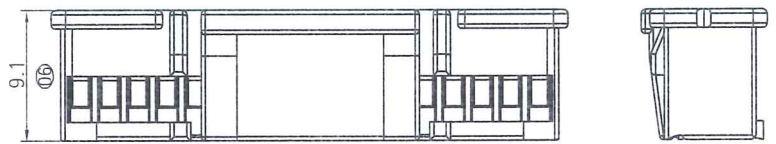



D

E

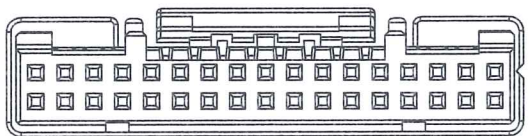

F

G

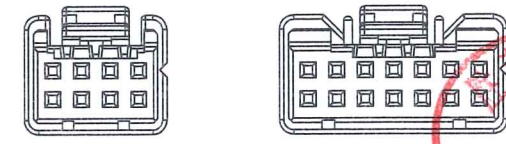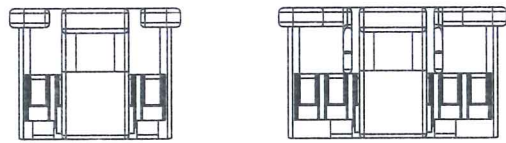

configuration for 8~10 circuits.

configuration for 12~18 circuits.

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC Min.
 After environmental test 500V AC Min
 Insulation Resistance : 1000MΩ Min.
 After environmental test 500MΩ Min.
 Contact Resistance : 10mΩ Max
 After environmental test :20mΩ Max
 Temperature Range : -25°C~+85°C
 Including temperature rise in applying electrical current
 The product using material and processing
 must conform to the "WI-PZ-142"HSF
 technical standard control requirements

12020 H00-2XNP-L
 Lock
 No. of Circuits
 H:Housing

Dimensional Ordering Information:

Circuits	Dimensions	
	A	B
2x4P	6.0	10.0
2x5P	8.0	12.0
2x6P	10.0	14.0
2x7P	12.0	16.0
2x8P	14.0	18.0
2x9P	16.0	20.0
2x10P	18.0	22.0
2x11P	20.0	24.0
2x12P	22.0	26.0
2x13P	24.0	28.0
2x14P	26.0	30.0
2x15P	28.0	32.0
2x16P	30.0	34.0
2x17P	32.0	36.0
2x18P	34.0	38.0
2x19P	36.0	40.0
2x20P	38.0	42.0



Part No.	Material	Color
12020H00-2xNPA-L	PBT 有卤 UL94-V0	Black
12020H00-2xNP-L	PBT 有卤 UL94-V0	White

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
X0	The new version file were released	2021.12.9	LINEAR	ANGLES	1:1								
			0.0±0.25	X° REF±6°	APPROVED	<i>Nelson</i>	21.12.21	12020H00-2XNP-L	ENDE05	TITLE 2.0 Pitch Housing			
			0.00±0.15	X° ±3°	DESIGNER	<i>mm</i>	21.12.21						
			0.000±0.08	X° X' ±2°	DRAWN	YZY	2021.12.21						
			UNIT: MM							REV	X0	SHEET	1/1

1 2 3 4 5 6 7 8

H

H