


Specifications:  
 Rated Voltage : 50V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -40°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements




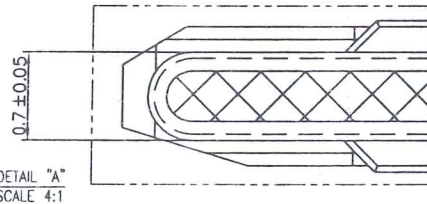


Circuits	Dimensions					
	A	B	C	D	E	F
10P	13.50	17.80	21.00	25.00	11.10	20.60
12P	16.50	20.80	24.00	28.00	14.10	23.60
14P	19.50	23.80	27.00	31.00	17.10	26.60

Part No.	Insulator	Contact
21502B90-NP-S-E-HF-R	LCP, UL94V-0/Natural(Beige)/无铅	Phosphor Bronze/Matte Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	 TERMINAL&CONNECTORS
A0	新图面发行	21.01.27	LINEAR	ANGLES	1:1	张振坤	21.01.27	21502B90-NP-S-E-HF-R	ENDE05	
			0.0±0.25	X° REF±6°	APPROVED	张振坤	21.01.27			
			0.00±0.15	X° ±3°	DESIGNER	张振坤	21.01.27			
			UNIT: MM	0.00±0.08	X° X'±2°	DRAWN	张振坤	21.01.27		
			SIZE: A4							REV: A0
										SHEET: 1/2

# 10P, 12P, 14P Contacts

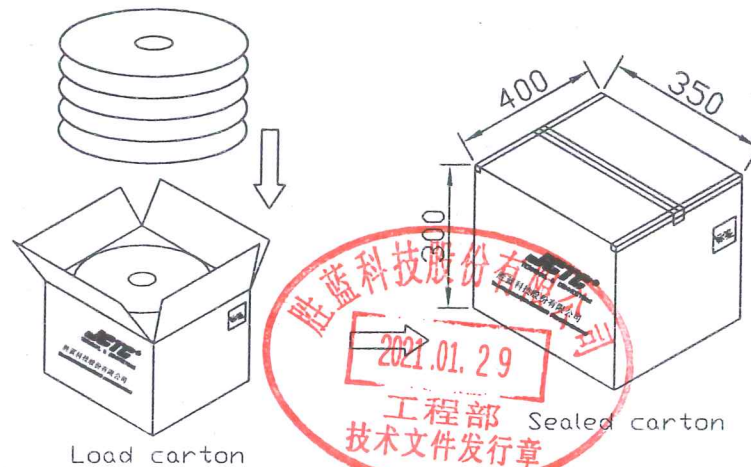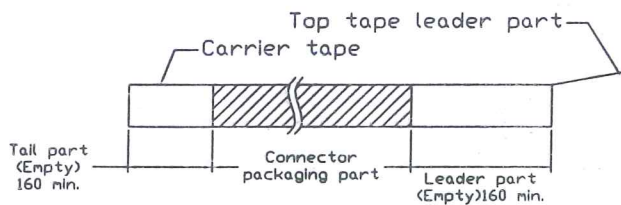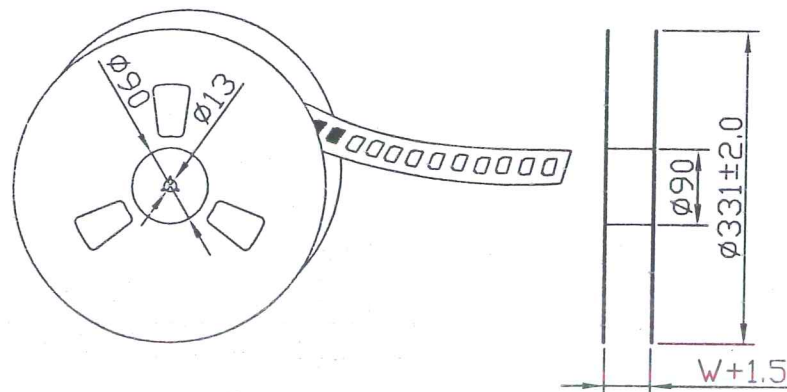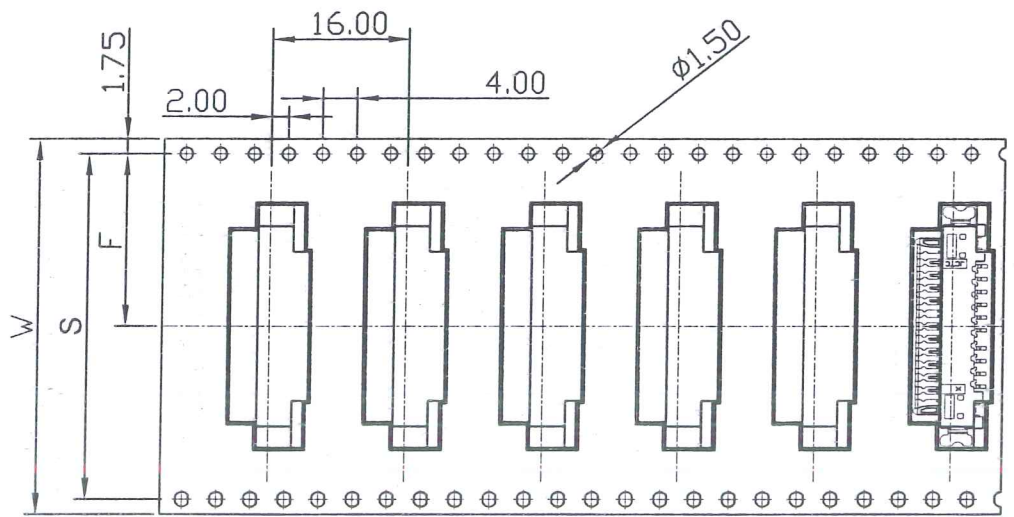

Number of Contacts	W±0.3	F±0.1	S±0.1	pcs/Reel	pcs/Box
10P, 12P, 14P	44	20.20	40.40	1,500	9,000

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	JCTC® TERMINAL&CONNECTORS
AO	新图面发行	21.01.27		SIZE: A4	LINEAR	ANGLES	APPROVED	张振坤	21.01.27	21502B90-NP-S-E-HF-R	
				0.0±0.25	X° REF±6°	DESIGNER	张振坤	21.01.27	TITLE: 1.5mm Pitch BTB		REV: AO
				0.00±0.15	X° ±3°	DRAWN	张振坤	21.01.27			SHEET: 2/2
				0.000±0.08	X° X' ±2°						