
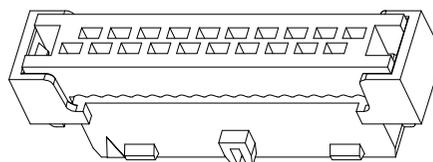
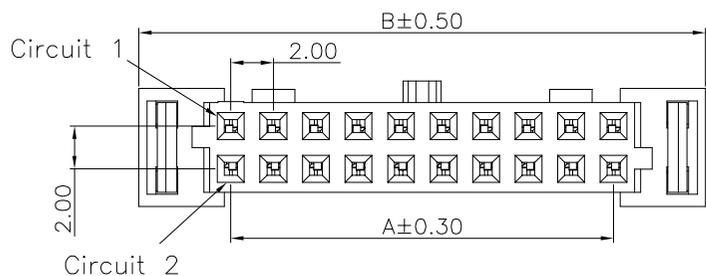



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

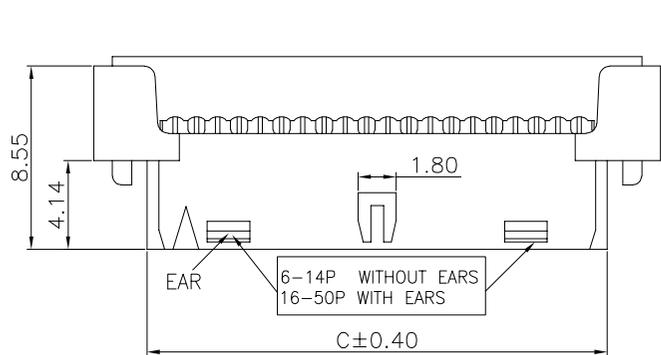

3D VIEW

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PBT,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 GOLD FLASH PLATED
 30U"Min NICKEL UNDERPLATING OVER ALL.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 1A AC/DC
 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 500V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC:TRAY
 6.P/N:
 D20740 M 0-2 XX 6 X X X
 SERIES NO: [] WATER CODE
 O-N/A
 MALE FEMALE: [] COLOR:
 M-MALE A-BLACK
 ANGLE: [] PLATING:
 0-180° 1-G/F
 ROW NO: [] TERMIPOINT:
 2-DOUBLE ROW 6-Punctured type
 PIN Q'PY: []
 10~50

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
10	8.00	16.65	11.65	24	22.00	30.65	25.65
12	10.00	18.65	13.65	26	24.00	32.65	27.65
14	12.00	20.65	15.65	34	32.00	40.65	35.65
16	14.00	22.65	17.65	40	38.00	46.65	41.65
18	16.00	24.65	19.65	44	42.00	50.65	45.65
20	18.00	26.65	21.65	50	48.00	56.65	51.65
22	20.00	28.65	23.65				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1	Wang_jr	22.10.28	D20740M0-2XX6XXX	ENDE05	
			0.00±0.25	X'±3'		Han_Gao	22.10.28	TITLE:		REV: A0	SHEET: 1/1
			0.000±0.10	X'X' ±2'		LanXuan_Hou	22.10.28	Pitch 2.0mm 180° 飞机头 IDC 二件套			