

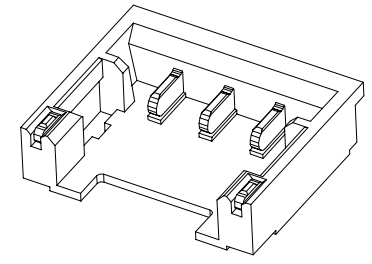


NOTES:
 Rated Voltage : 50V AC/DC
 Rated Current : 2A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

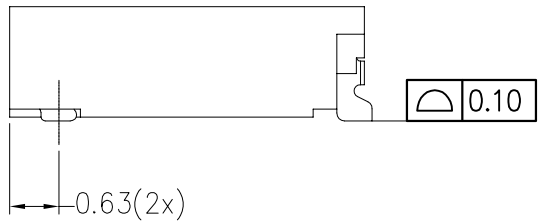

3D SHOWN

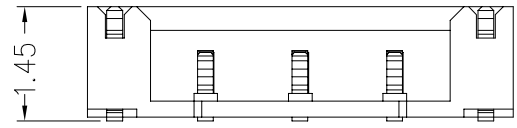


ITEM	PARTS	Q'TY	MATERIAL	REMARK
3	PEG	2	C2680	Ni 40u" UNDER PLATING OVER ALL, Sn PLATING OVER ALL
2	CONTACT	3	C2680	Ni 100u" UNDER PLATING OVER ALL, Au10u" PLATING OVER ALL
1	HOUSING	1	LCP	UL94V-0, Natural

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC [®] TERMINAL&CONNECTORS
AO	The new version file were released	2022.06.17	LINEAR	1:1	Frey Yang	2022.06.17	1120AW90-3P-S-5F-W6	ENDE05	
			ANGLES	APPROVED	Daniel Dong	2022.06.17			
			UNIT: MM	DESIGNER	Li Xing Ze	2022.06.17	TITLE		
			SIZE: A4	DRAWN			1.2PH BTW CONN H1.45 RECEPTACLE		

环保物料

1、There should be at least 160mm empty packet at the beginning of carrier tape, and at least 160mm empty packet at the ending.
The cover should be 240mm longer than carrier tape.
Package amount: 4500 PCS/reel.


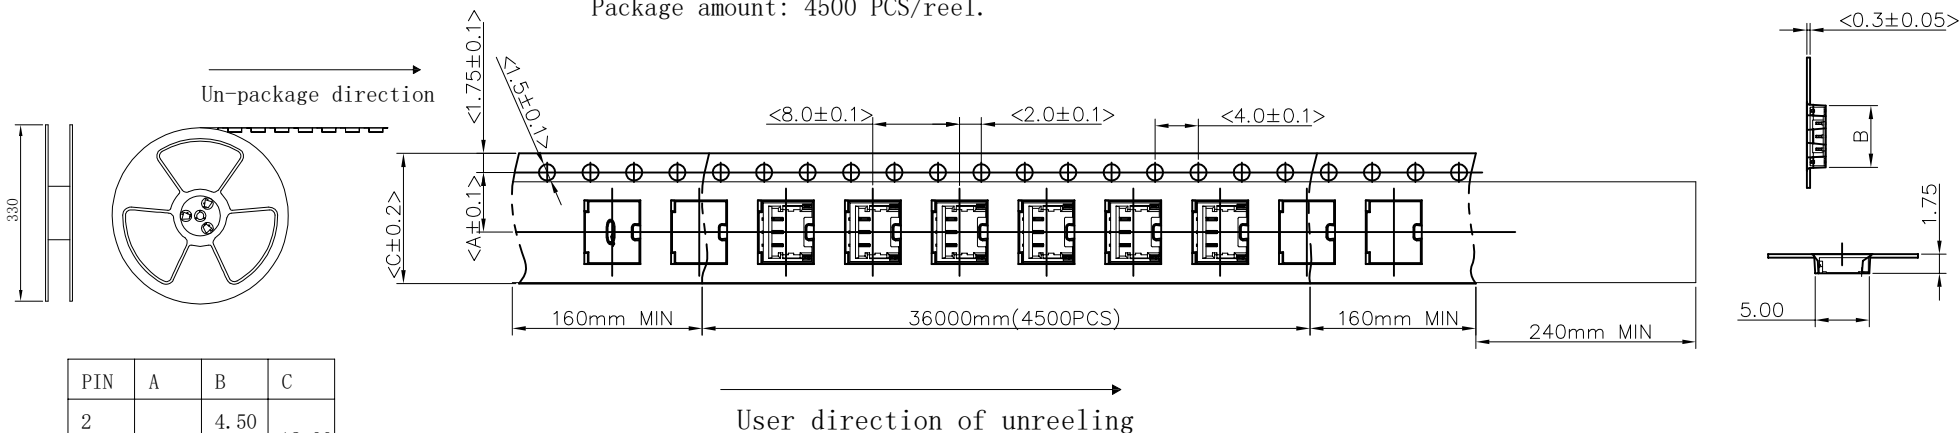


PIN	A	B	C
2	5.50	4.50	12.00
3		5.70	
4	7.50	6.90	16.00
5		8.10	
6		9.30	

User direction of unreeling

2、Put the label on the reel firstly. Secondly put the reel and two bags desiccant into the water-proof bag, lastly seal the water-proof bag with heat-seal method.

3、Put the wafter-proof bag with reel into the carton, until it's full, and then seal the carton with adhesive tape, lastly put the label onto the carton

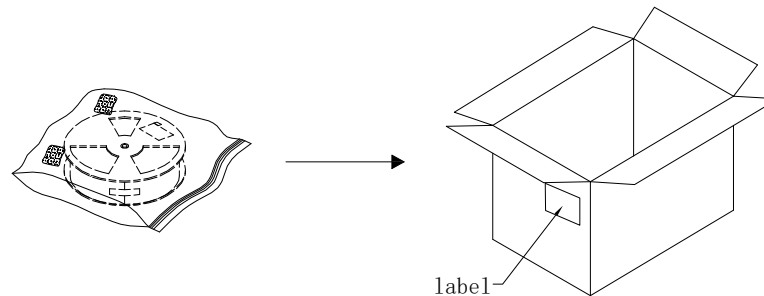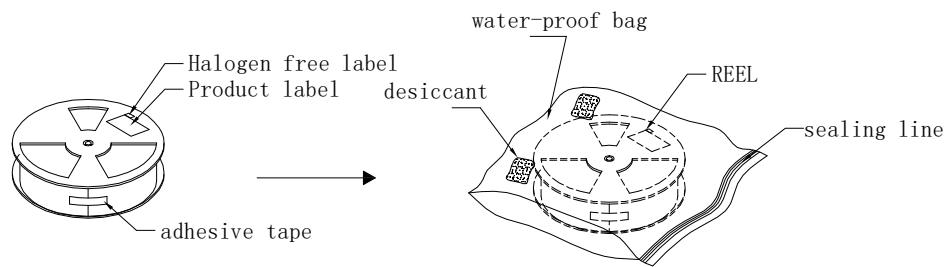

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	1120AW90-3P-S-5F-W6	ENDE05	JCTC® TERMINAL&CONNECTORS
A0	新图面发行	2022.06.17		LINEAR	ANGLES	APPROVED	Frey Yang	2022.06.17			
			0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	2022.06.17	1.2PH BTW CONN H1.45 RECEPTACLE			
			0.00±0.10	X° X' ±2°	DRAWN	Li Xing Ze	2022.06.17				