


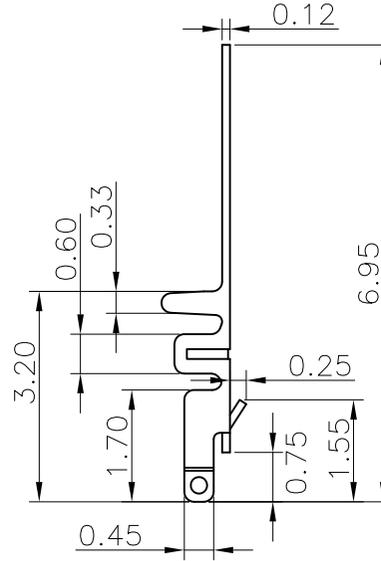


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements


RoHS

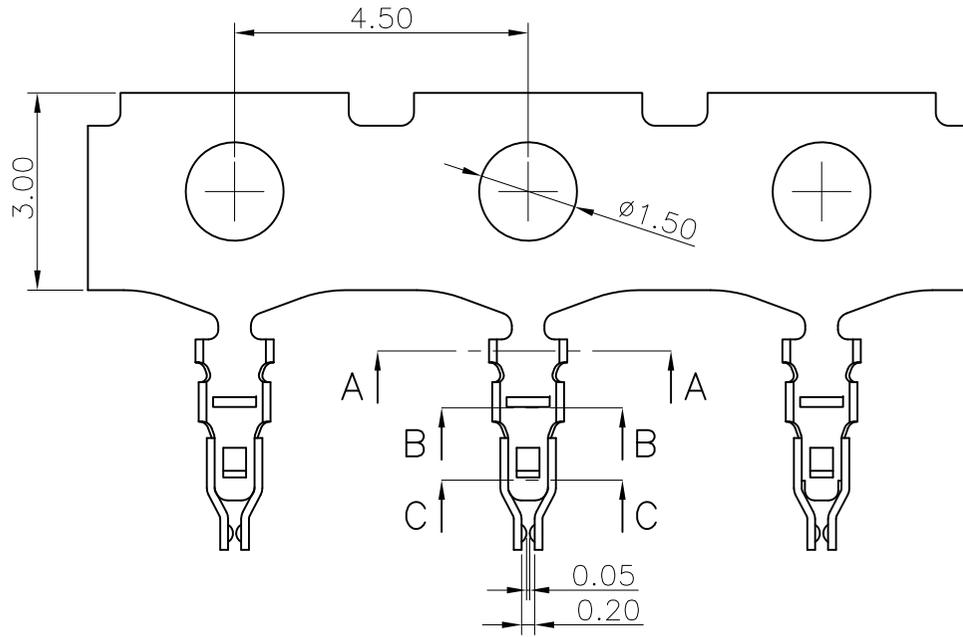

A-A



B-B

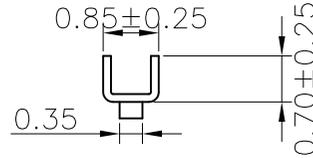

C-C

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.CONTACTS: PHOSPHOR BRONZE
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 0.05KGF/pin min
 3-2.DURABILITY: 10 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 1.5A AC/DC
 RATED VOLTAGE : 50V AC/DC
 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 4-3.INSULATION RESISTANCE: 100MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 500V
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 6.PACKAGE SPEC : REEL
 7.P/N: A1201 T F X-X

SERIES NO: _____ PLATING:
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE TIN

CONNECTOR: _____
 T-TERMINAL

MALE FEMALE: _____ METAL:
 F-FEMALE P-PHOSPHOR BRONZE
 M-MALE B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	A1201TFX-X	ENDE05		
			0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0		SHEET: 1/1
			UNIT:mm	X°±3°	DRAWN	LanXuan_Hou	22.05.09	Pitch 1.20mm MX 母端子 AWG#28~#30				
			SIZE: A4	0.000±0.10	X°X' ±2°							