







The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

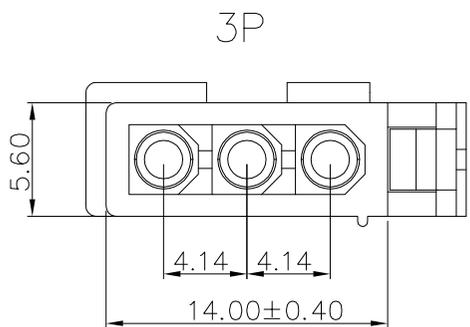

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA66
 2.ELECTRICAL PERFORMANCE:
 2-1.CURRENT RATING: 7A
 RATED VOLTAGE : 600V
 2-2.CONTACT RESISTANCE: 20 mΩ MAX
 2-3.INSULATION RESISTANCE: 1000MΩ Min
 2-4.DIELECTRIC WITHSTANDING : 1500V AC
 3.ENVIRONMENTAL PERFORMANCE:
 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
 4.PACKAGE SPEC:PE BAG
 5.P/N:

C4140 H M-1 XX X X
 SERIES NO: _____ HOUSING: 0-UL94V-0
 CONNECTOR: _____ COLOR: A-BLACK S-NATURE
 H-HOUSING
 MALE FEMALE: _____
 M-MALE
 F-FEMALE
 ROW NO: _____ PIN Q'PY: 02~03
 1-SINGLE ROW

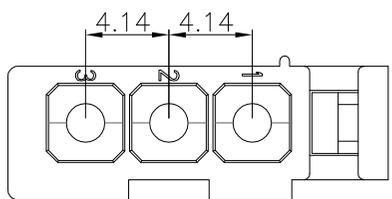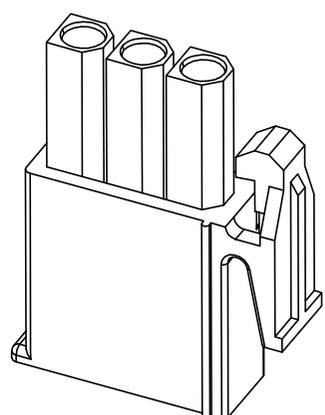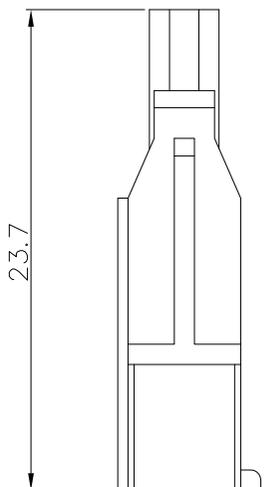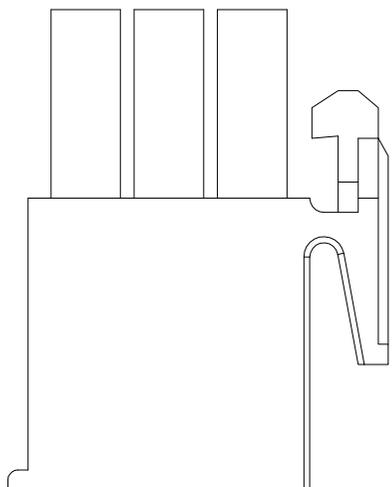

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	C4140HM-1XXXX	ENDE05	
			UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17	Pitch 4.14mm Male 单排 Housing		