

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



A

B

C





D

E

F

G

H

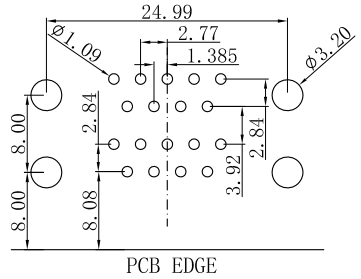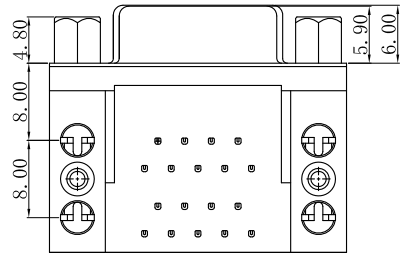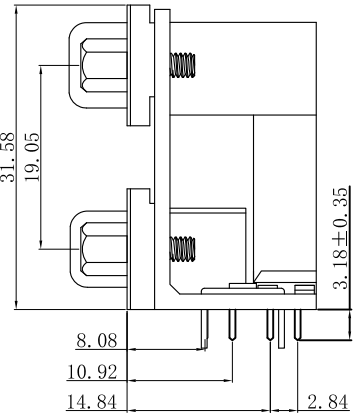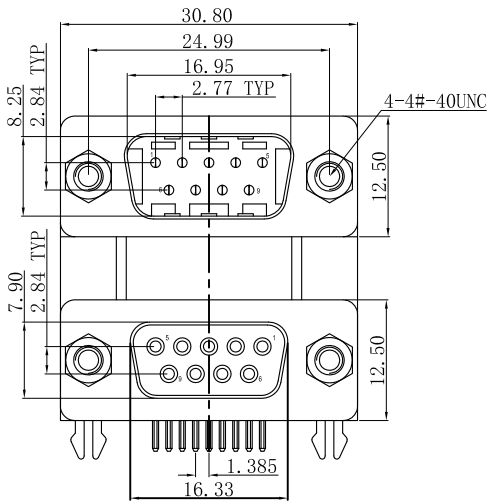

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING:PBT BLACK UL94V-0  
 1-2.CONTACTS:COPPER ALLOY .  
 1-3.SHELL: SPCC.  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 Ni 50u" MIN. UNDER PLATED OVER ALL.  
 Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.  
 2-2. SHELL:  
 Ni 30u" MIN. UNDER PLATED OVER ALL.  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING:3A  
 3-2.VOLTAGE RATING:250V AC.  
 3-3.CONTACT RESISTANCE: 30mΩ Max.  
 3-4.INSULATION RESISTANCE: 1000MΩ MIN  
 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min  
 4.ENVIRONMENTAL PERFORMANCE:  
 OPERATING TEMPERATURE: -55°C~+105°C.

WLDBM9-18 1 X X X 160  
 PLATING: TYPE  
 1-G/F  
 2-AU 3U"  
 5-AU 15U"  
 COLOUR: A:Black  
 A: Specification Type A  
 B: Specification Type B  
 C: Specification Type C  
 D: Specification Type D  
 E: Specification Type E  
 F: Specification Type F

Specification Type (1: 2)					
A	B	C	D	E	F

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 03. 11	WLDBM9-181XXX160	ENDE05	
			0.0±0.35	X° REF±6°	DESIGNER	Ding_Bo	21. 03. 11	TITLE:			
			UNIT: mm	X° ±3°	DRAWN	Ou_Jian	21. 03. 11	DOUBLE DR9M-DR9F			
			SIZE: A4	0.000±0.10	X° X'±2°					REV: A0	SHEET: 1/1