


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

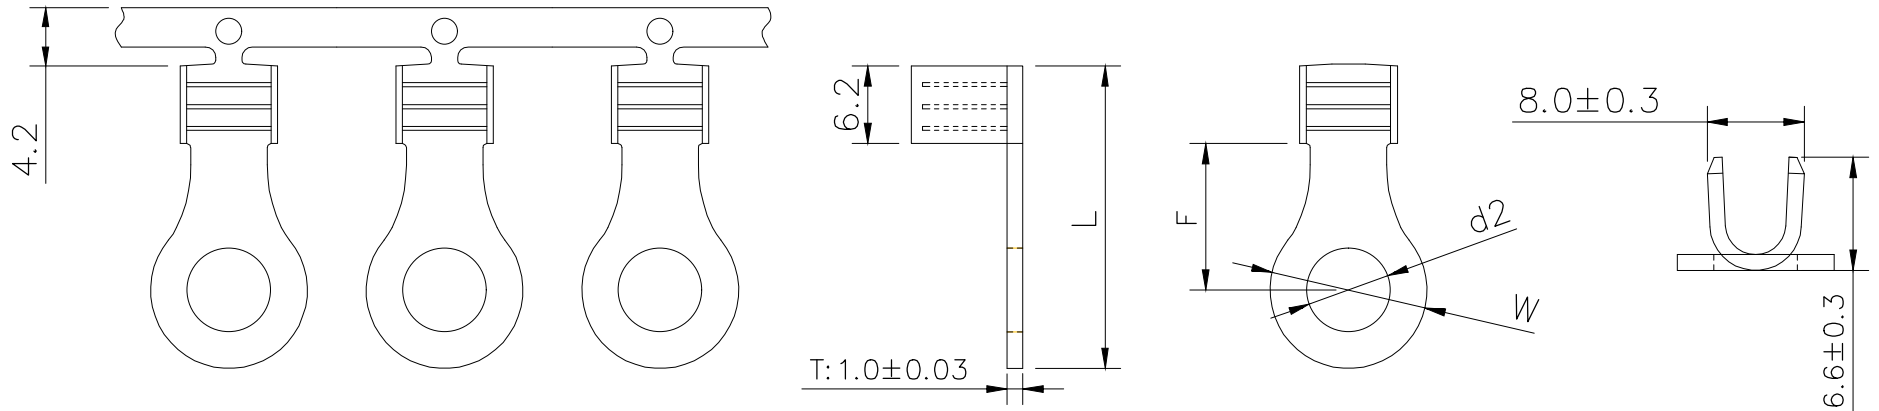

- 备注：
 1. 适用线型AWG12-10#
 2. 端子材质紫铜、镀锡
 3. 包装方式：卷装

Item NO. 料号	螺栓规格		mm/inch 主要尺寸			
	Stud Size	d2±0.2	W±0.3	F±0.3	L±0.5	
WLLR20-032AD030A01	#4	3.2(.126)	7.2(.283)	5.9(.232)	16.2(.638)	
WLLR20-037AD030A01	#6	3.7(.146)	7.2(.283)	5.9(.232)	16.2(.638)	
WLLR20-043AD030A01	#8	4.3(.169)	7.2(.283)	5.9(.232)	16.2(.638)	
WLLR20-043AD030A02	#8	4.3(.169)	9.5(.374)	8.3(.326)	19.3(.779)	
WLLR20-053AD030A01	#10	5.3(.208)	9.5(.374)	8.3(.326)	19.3(.779)	
WLLR20-064AD030A01	1/4	6.4(.252)	12.0(.472)	11.0(.433)	23.5(.925)	
WLLR20-084AD030A01	5/16	8.4(.331)	15.0(.590)	13.7(.539)	28.0(1.102)	
WLLR20-105AD030A01	3/8	10.5(.413)	15.0(.590)	13.7(.539)	28.0(1.102)	

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLLR20-XXXAD030AXX	DWG.NO: ENDE05	
A0	NEW RELEASE	22.01.04		LINEAR	ANGLES	APPROVED	Ximei_Yang	22.01.04			
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.01.04	TITLE: 无绝缘0形连续端子 适用线型AWG12-10#	REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zhonghao_Che	22.01.04			