







The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 5 VAC
3. TEMPERATURE RANGE: -25 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

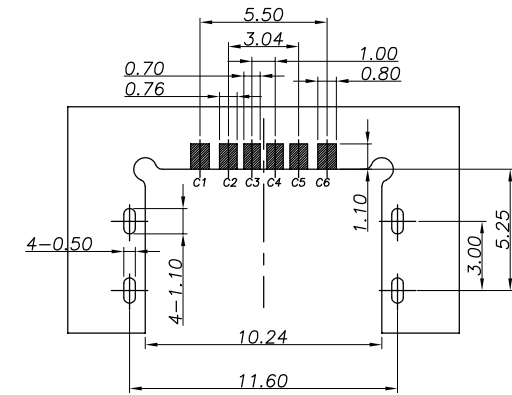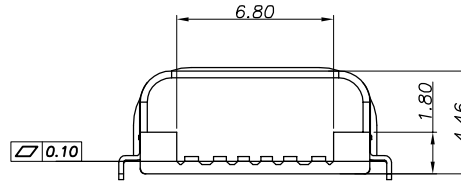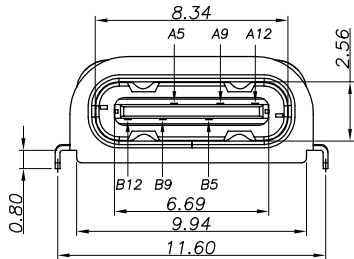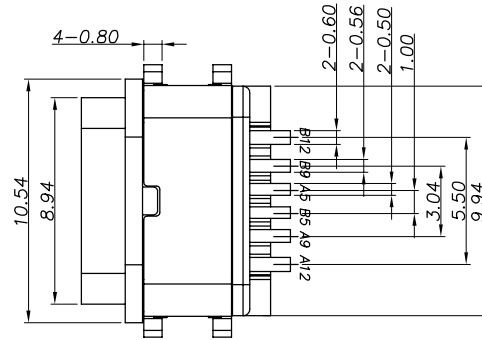

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

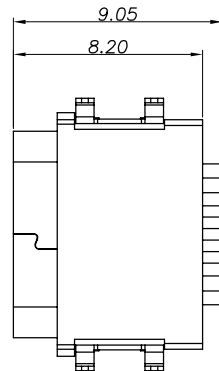


5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1			WLT2F9-068XX0113	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.11.17	TITLE: TYPE C 6P/F R/A SMT L=8.20mm		REV: A0	SHEET: 1/2
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17				
				0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17				

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS

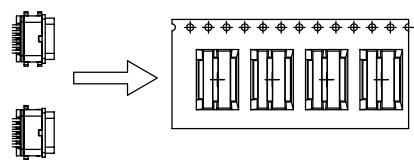

① 产品入载带示意图

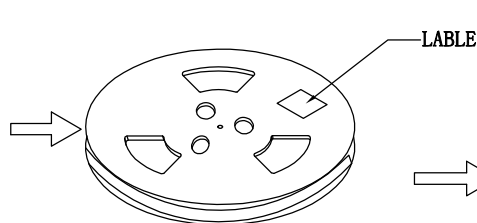


② 卷盘贴标签示意图

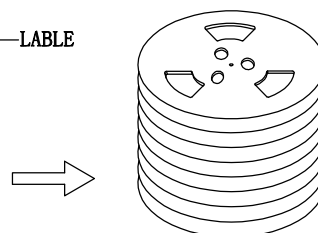

③ 10盘产品叠层示意图

	REEL	CARTON
CONNECTOR (PCS)	800	8000

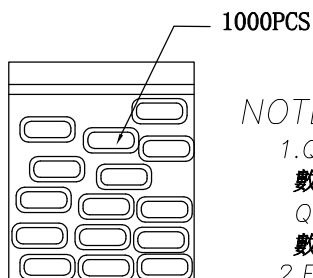

NOTE:

1.QUANTITY/REEL:800 PCS

数量/卷:800 PCS

QUANTITY/INNER CARTON:800 X 10 = 8000 PCS


数量/箱: 800 X 10 = 8000 PCS

2.FREE 20 CAVE IN THE FRONT CARRIER ADN FREE 20 CAVE IN THE END CARRIER.


包装带内圈空20格,外圈空20格.

Ring Packing

防水圈袋装示意图

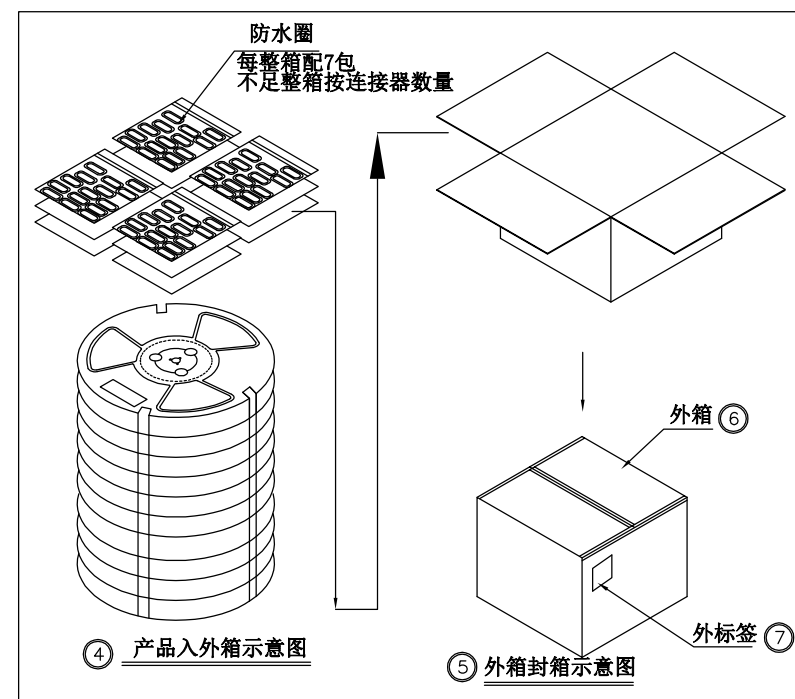

④ 产品入外箱示意图

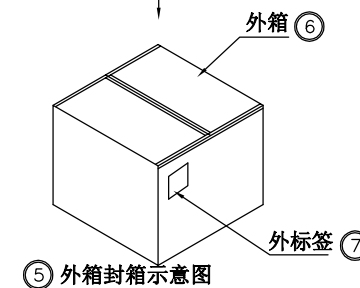

⑤ 外箱封箱示意图

P/N:

WLT2F9-06 8 X X 0 113

Plating Contact

1-G/F

2-Au 3u"

3-AU 5u"

5-Au 15u"

6-Au 30u"

COLOR:
A-BLACK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	WLT2F9-068XX0113	ENDE05	
			UNIT:mm	0.00±0.25	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: TYPE C 6P/F R/A SMT L=8.20mm	REV: A0	SHEET: 2/2
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17			